


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

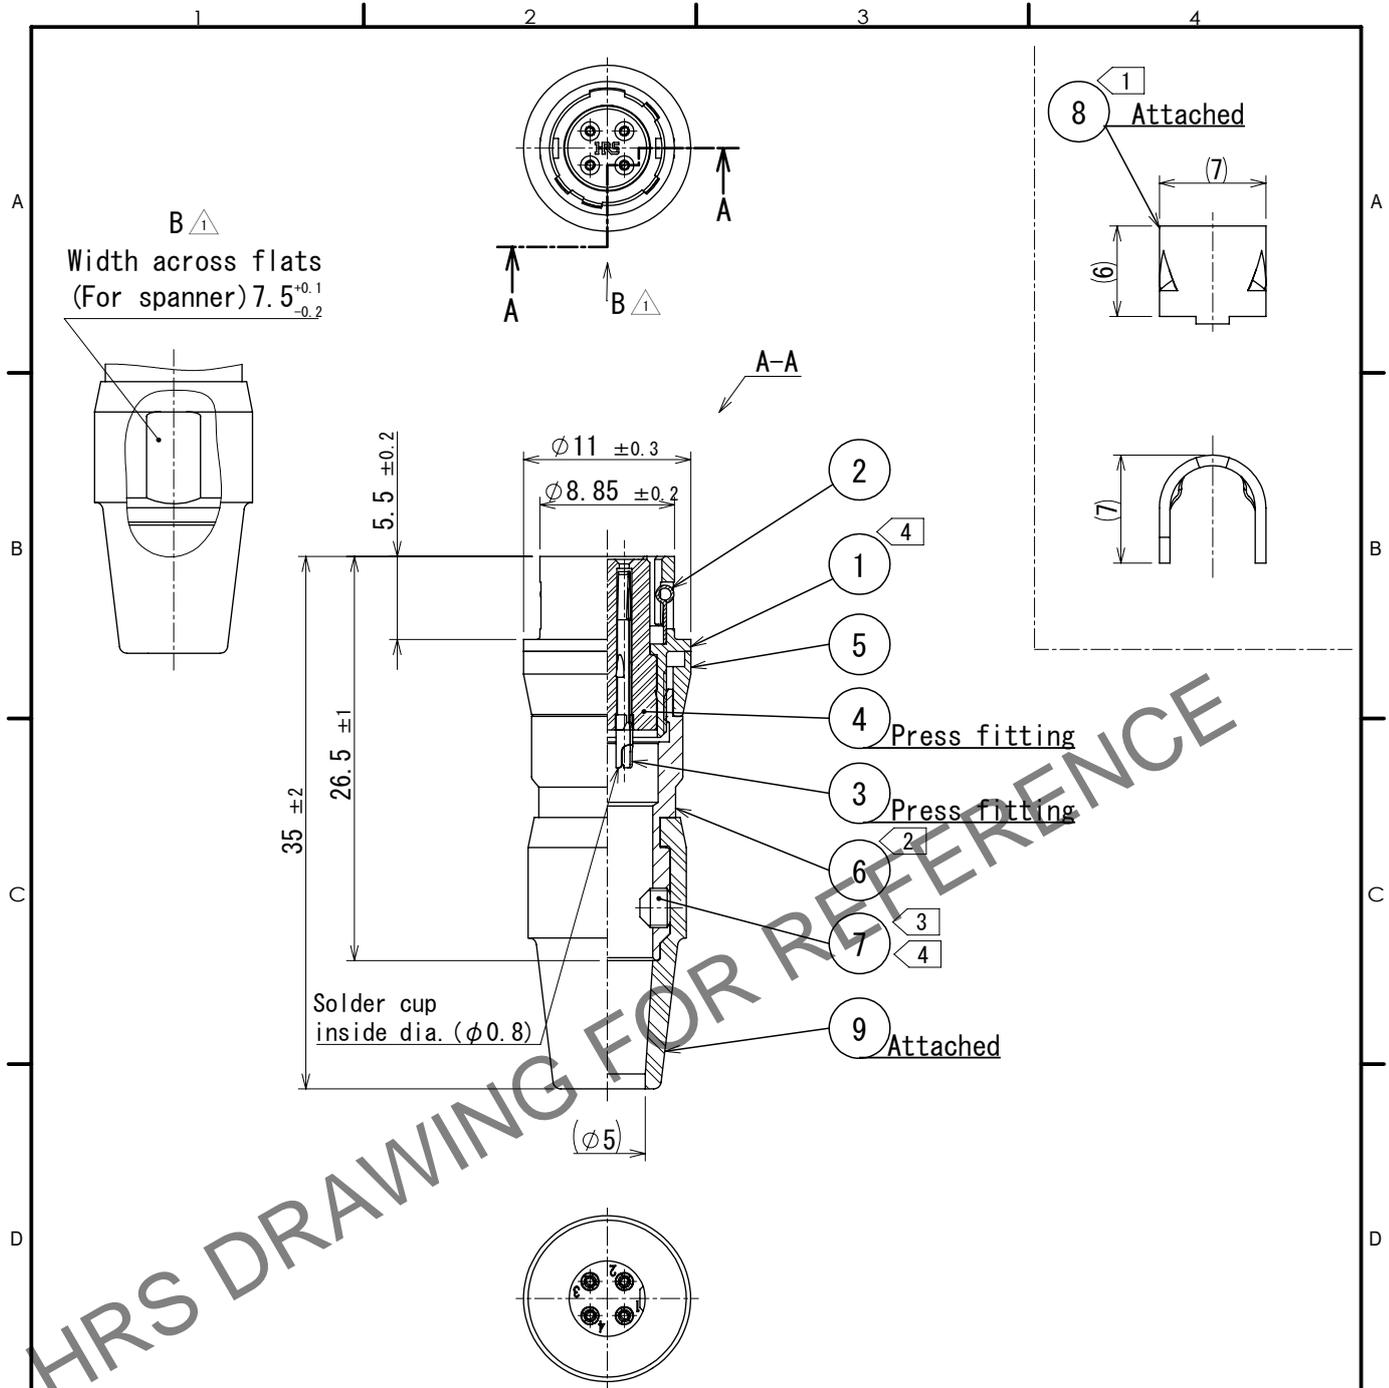

- Notes
- ① Hand crimping tool. Ref. No. ⑧ : HR10A-TG-02 (CL150-0041-2)  
The hole diameter for crimping :  $\phi 5.3$
  - ② The recommended clamp torque, Ref. No. ⑥ : 1.5 to 2 N · m.
  - ③ Across flats hexagon head of Ref. No. ⑦ : 1.27  
The recommended clamp torque, Ref. No. ⑦ : 0.3 to 0.4 N · m.
  - △④ Loctite 243, Henkel Japan or equivalent apply to prevent Ref. No. ① and ⑦ from loosening.
  - 5 One example of the rotation of Ref. No. ⑥ to Ref. No. ① is shown. △CAD change

5	Brass	Matte finish nickel plated					
4	Polyamide	(Black) UL94V-0	9	Chloroprene rubber	(Black)		
3	Phosphor bronze	Silver plating 2 $\mu$ m min.	8	Brass			
2	Stainless steel		7	Steel	Nickel plating Hexagon socket set Screw M2.6 $\times$ 0.45 $\times$ 2		
1	Zinc alloy	Matte finish nickel plated	6	Brass	Matte finish nickel plated		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

UNITS mm 	SCALE 2:1 	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		4	DIS-C-00019191	HY. KISHI	HY. KOBAYASHI	2025. 02. 03
HIROSE ELECTRIC CO., LTD.	APPROVED :	MO. SATOH	2005. 10. 20	DRAWING NO.	EDC-020542-73-73	
	CHECKED :	EJ. KUNII	2005. 10. 20	PART NO.	HR10A-7J-4S (73)	
	DESIGNED :	DS. MATSUNE	2005. 10. 19	CODE NO.	CL0110-0309-4-73	
	DRAWN :	DS. MATSUNE	2005. 10. 19			