


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

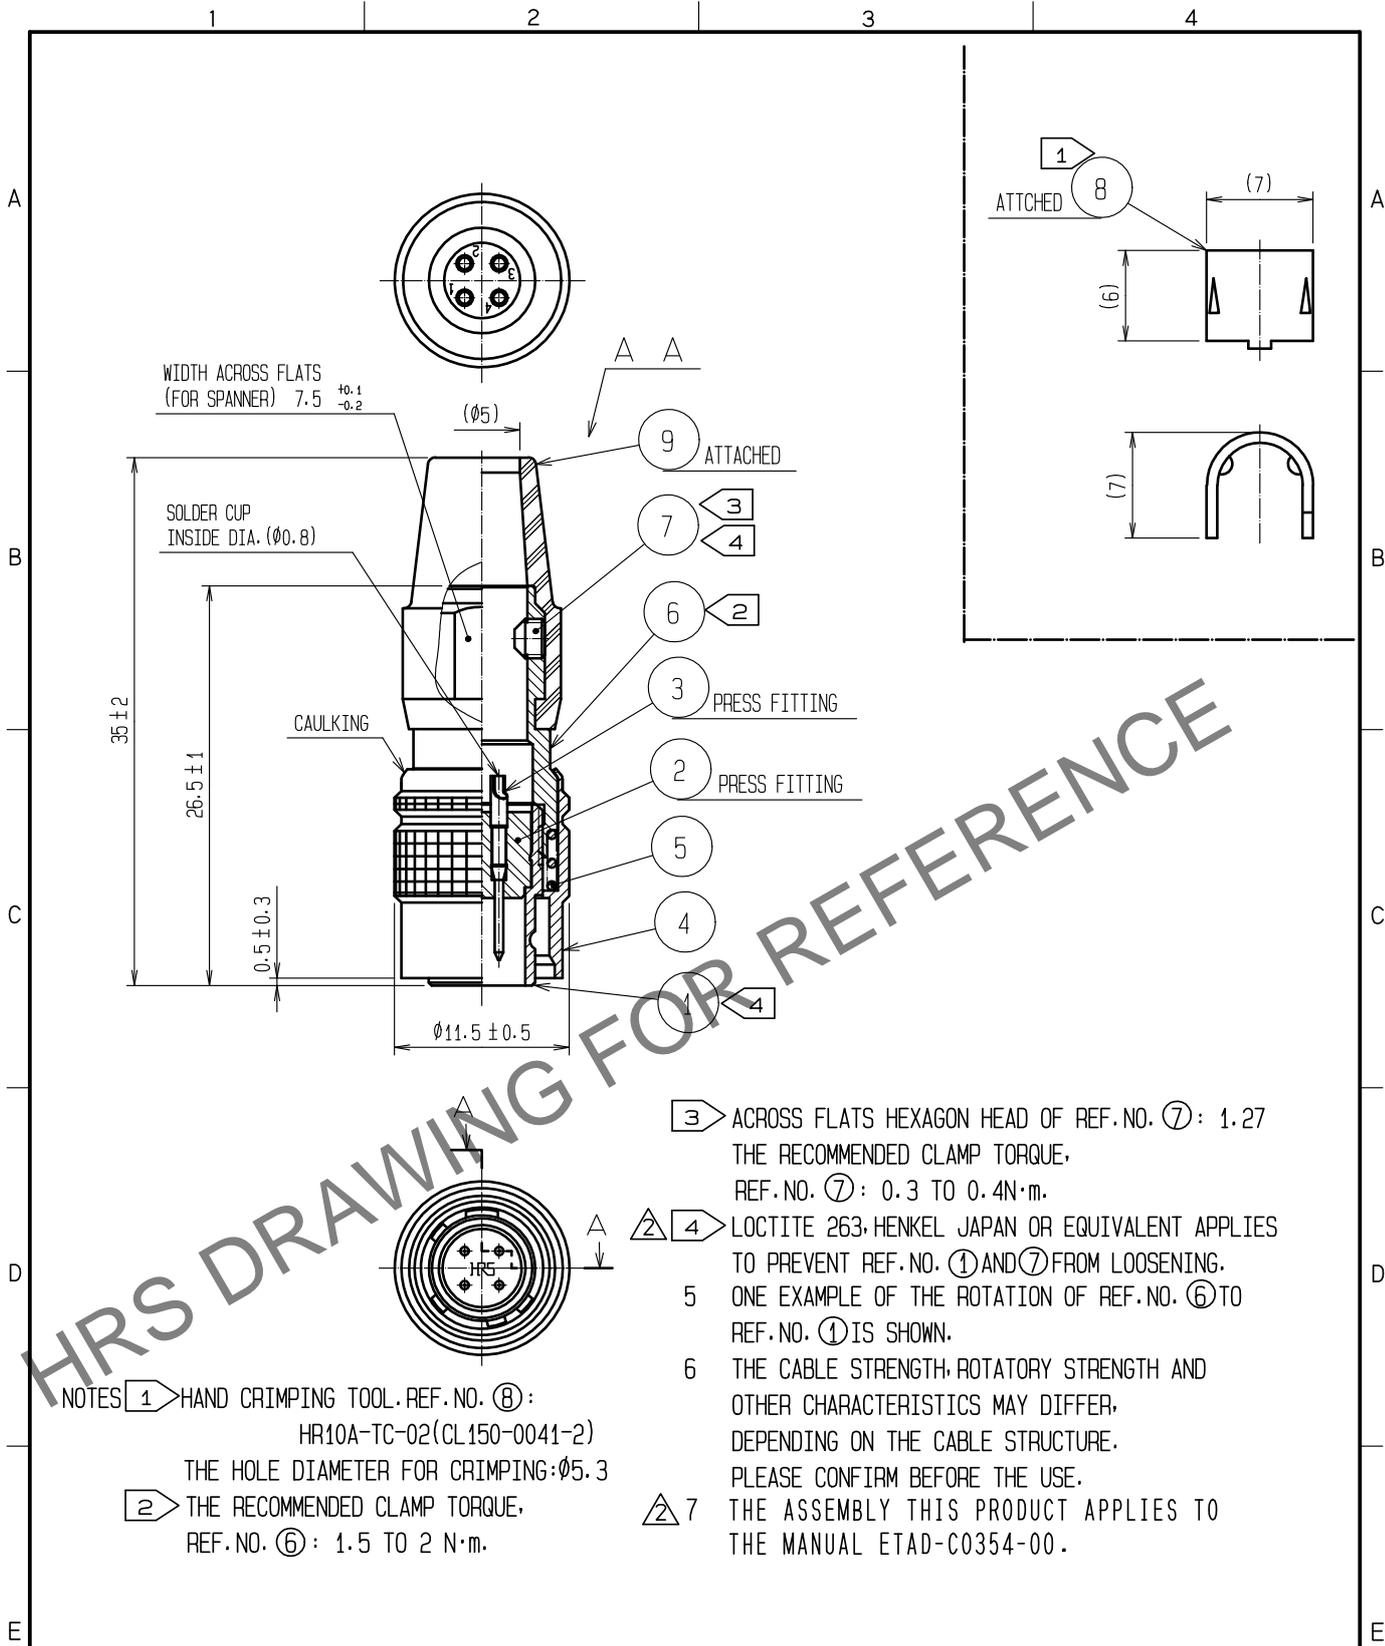

NOTES ① HAND CRIMPING TOOL. REF. NO. ⑧ :
 HR10A-TC-02 (CL150-0041-2)
 THE HOLE DIAMETER FOR CRIMPING: $\phi 5.3$

② THE RECOMMENDED CLAMP TORQUE,
 REF. NO. ⑥ : 1.5 TO 2 N·m.

③ ACROSS FLATS HEXAGON HEAD OF REF. NO. ⑦ : 1.27
 THE RECOMMENDED CLAMP TORQUE,
 REF. NO. ⑦ : 0.3 TO 0.4 N·m.

④ LOCTITE 263, HENKEL JAPAN OR EQUIVALENT APPLIES
 TO PREVENT REF. NO. ① AND ⑦ FROM LOOSENING.
 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑥ TO
 REF. NO. ① IS SHOWN.

⑤ THE CABLE STRENGTH, ROTATORY STRENGTH AND
 OTHER CHARACTERISTICS MAY DIFFER,
 DEPENDING ON THE CABLE STRUCTURE.
 PLEASE CONFIRM BEFORE THE USE.

⑦ THE ASSEMBLY THIS PRODUCT APPLIES TO
 THE MANUAL ETAD-C0354-00.

5	STEEL	NICKEL PLATING			
4	BRASS	MATTE FINISH NICKEL PLATED	9	CHLOROPRENE RUBBER (BLACK)	
3	BRASS	GOLD PLATING: 0.2 μ m min. NICKEL UNDER PLATING: 2 μ m min.	8	BRASS	
2	POLYAMIDE	(BLACK) UL94V-0	7	STEEL	NICKEL PLATING HEXAGON SOCKET SET SCREW M2.6X0.45X2
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT ② 2	DESCRIPTION OF REVISIONS DIS-C-00016958	DESIGNED HT. ZENBA	CHECKED EJ. KUNII	DATE 20240227
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH	20060803	DRAWING NO. EDC4-020534-74			
		CHECKED : EJ. KUNII	20060803	PART NO. HR10A-7P-4P(74)			
		DESIGNED : DS. MATSUNE	20060803	CODE NO. CL0110-0301-2-74			
		DRAWN : MK. SATO	20060727		② 1/1		