


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

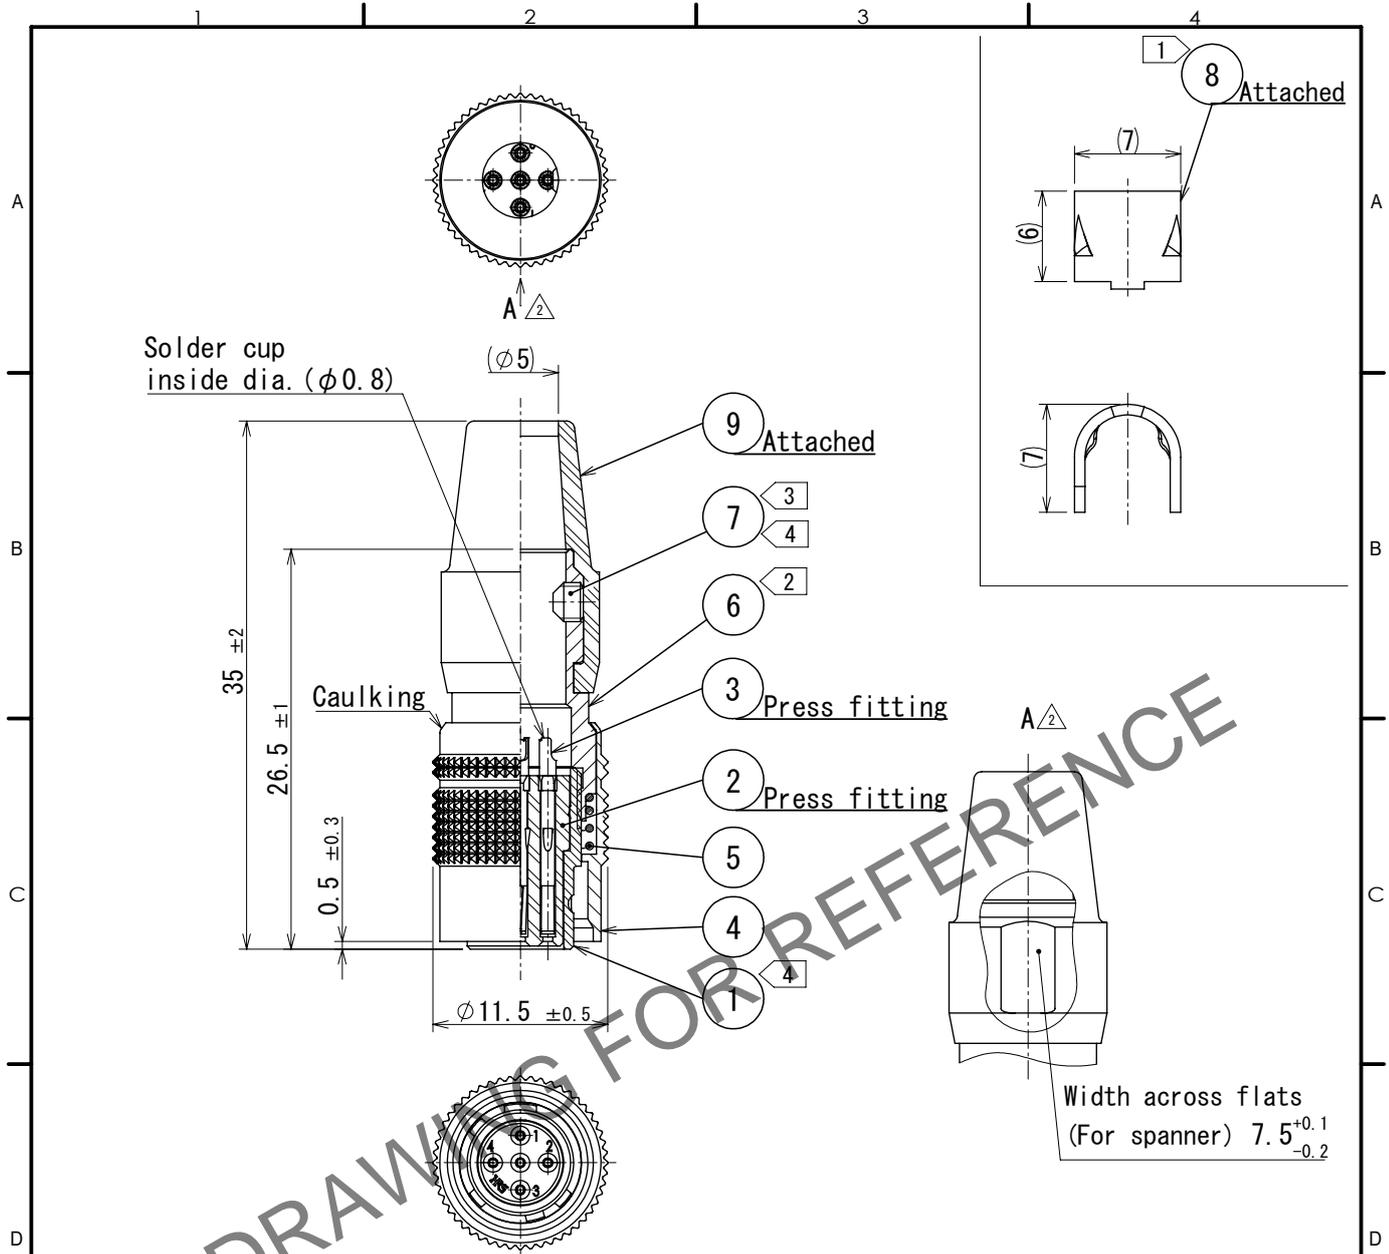

- Notes
- ① Applicable crimp tool. Ref. No. ⑧: HR10A-TC-02 (CL150-0041-2)  
Apply to :  $\phi 5.3$
  - ② The recommended clamp torque, Ref. No. ⑥ : 1.5 to 2 N · m.
  - ③ Across flats hexagon head of Ref. No. ⑦ : 1.27  
The recommended clamp torque, Ref. No. ⑦ : 0.3 to 0.4N · m.
  - ④ Loctite 263, Henkel Japan or equivalent applies to prevent Ref. No. ① and ⑦ from loosening.
  - ⑤ One example of the rotation of Ref. No. ⑥ to Ref. No. ① is shown.
  - ⑥ The cable pull and twisting strength and other characteristics may differ, depending on the cable structure. Please confirm before the use.
  - ⑦ The assembly this product applies to the manual ETAD-C0354-00. △ CAD change

5	Steel	Nickel plating					
4	Brass	Matte finish nickel plated	9	Chloroprene rubber	(Black)		
3	Phosphor bronze	Silver plating 2μm min.	8	Brass			
2	Polyamide	(Black) UL94V-0	7	Steel	Nickel plating Hexagon socket set Screw M2.6×0.45×2		
1	Zinc alloy	Matte finish nickel plated	6	Brass	Nickel plating		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

	HIROSE ELECTRIC CO., LTD.	UNITS mm		SCALE 2:1	COUNT 3	DESCRIPTION OF REVISIONS DIS-C-00019588	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 2025. 04. 10
		APPROVED : MO. SATOH CHECKED : E.J. KUNII DESIGNED : TO. HORII DRAWN : MK. SATO	2006. 12. 21 2006. 12. 20 2006. 12. 19 2006. 12. 18	DRAWING NO. EDC-029110-73-73 PART NO. HR10A-7P-5S (73) CODE NO. CL0110-0319-8-73					