


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

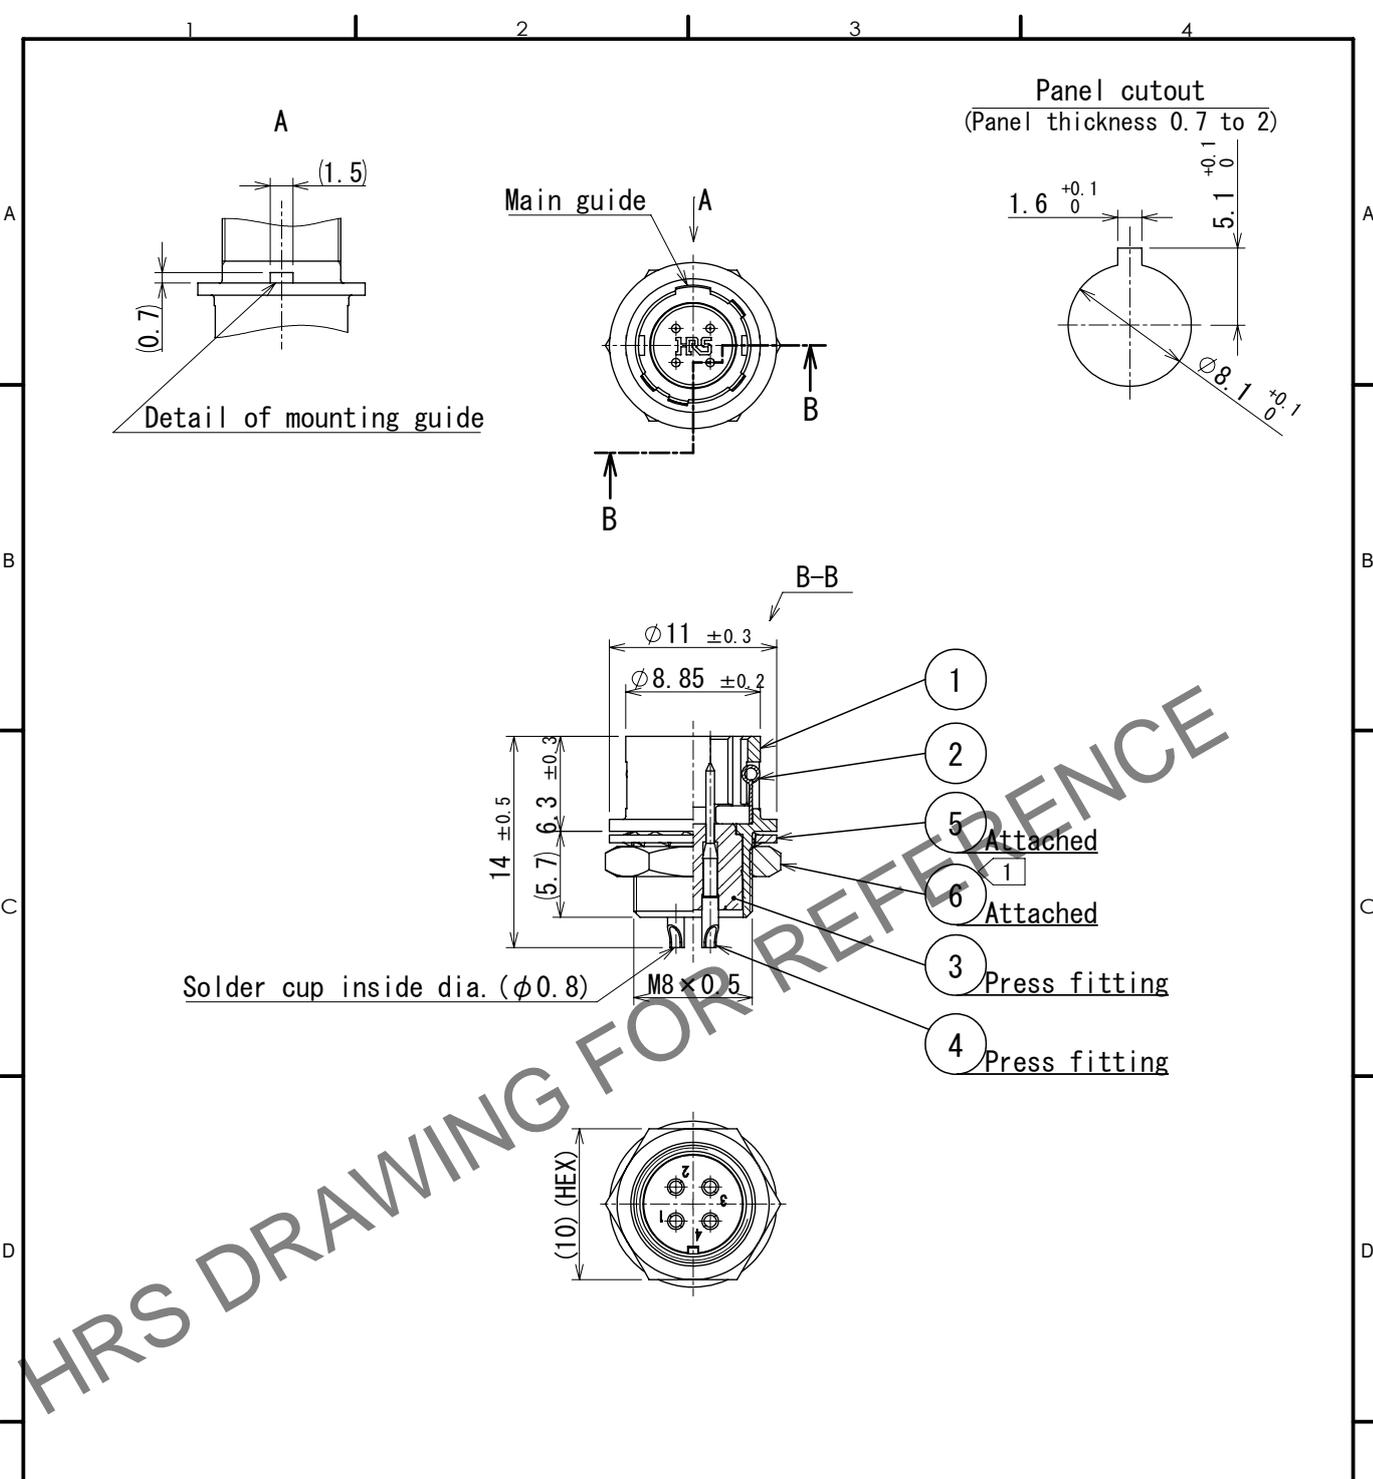

Note ① The recommended clamp torque of Ref.No. ⑥: 1.5N · m.
 ⚠ Loctite 243 , Loctite or equivalent apply to prevent Ref.No. ⑥ from loosening.

⚠ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	Polyamide	(Black)	UL94V-0	6	Brass	Nickel plating	
2	Stainless steel			5	Phosphor bronze	Nickel plating	
1	Zinc alloy	Matte finish	nickel plated	4	Brass	Silver plating	2μm min.

UNITS mm 	SCALE 2:1 	COUNT 2 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
			DIS-C-00019275	HY. KISHI	HY. KOBAYASHI	2025. 02. 20
HIROSE ELECTRIC CO., LTD.			APPROVED : MO. SATOH 2005. 12. 10 CHECKED : E.J. KUNII 2005. 12. 09 DESIGNED : HS. NAGANO 2005. 12. 06 DRAWN : TO. HORII 2005. 11. 08	DRAWING NO. EDC-020539-73-73 PART NO. HR10A-7R-4P (73) CODE NO. CL0110-0306-6-73		