

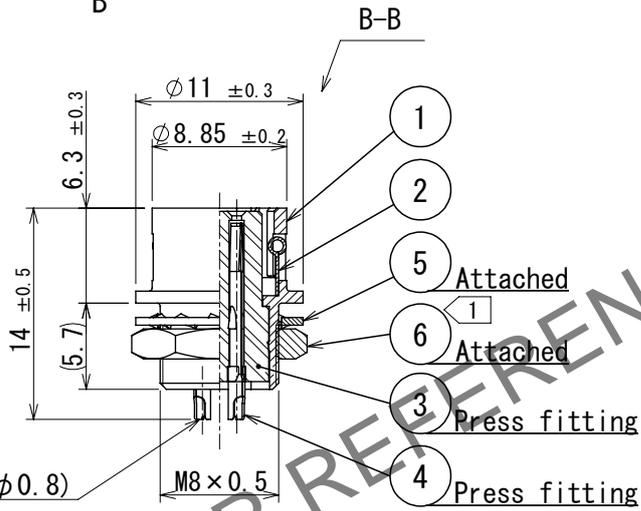
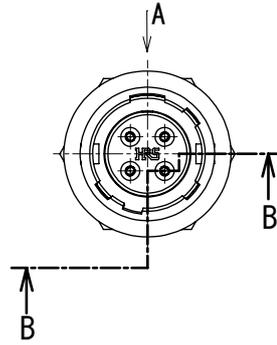



Sep. 1. 2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved. In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

A Detail of mounting guide



Panel cutout  
t = 0.7 to 2

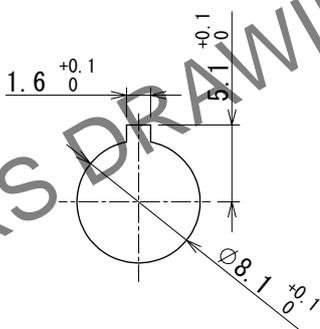

**Note 1** The recommended clamp torque of Ref.No. ⑥ to be 1.5 N · m. Loctite 243, Henkel Japan or equivalent apply to prevent Ref.No. ⑥ from loosening.

**△ CAD change**

3	Polyamide	(Black) UL94V-0	6	Brass	Nickel plating		
2	Stainless steel		5	Phosphor bronze	Nickel plating		
1	Zinc alloy	Matte finish nickel plated	4	Phosphor bronze	Silver plating 2μm min.		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

UNITS mm		SCALE 2:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00018536	DESIGNED HY. KISHI	CHECKED HY. KOBAYASHI	DATE 2024. 10. 24
HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH	2005. 10. 20	DRAWING NO. EDC-020538-73-73			
		CHECKED : EJ. KUNII	2005. 10. 20	PART NO. HR10A-7R-4S (73)			
		DESIGNED : DS. MATSUNE	2005. 10. 19	CODE NO. CL0110-0305-3-73			
		DRAWN : DS. MATSUNE	2005. 10. 19	1/1			