


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

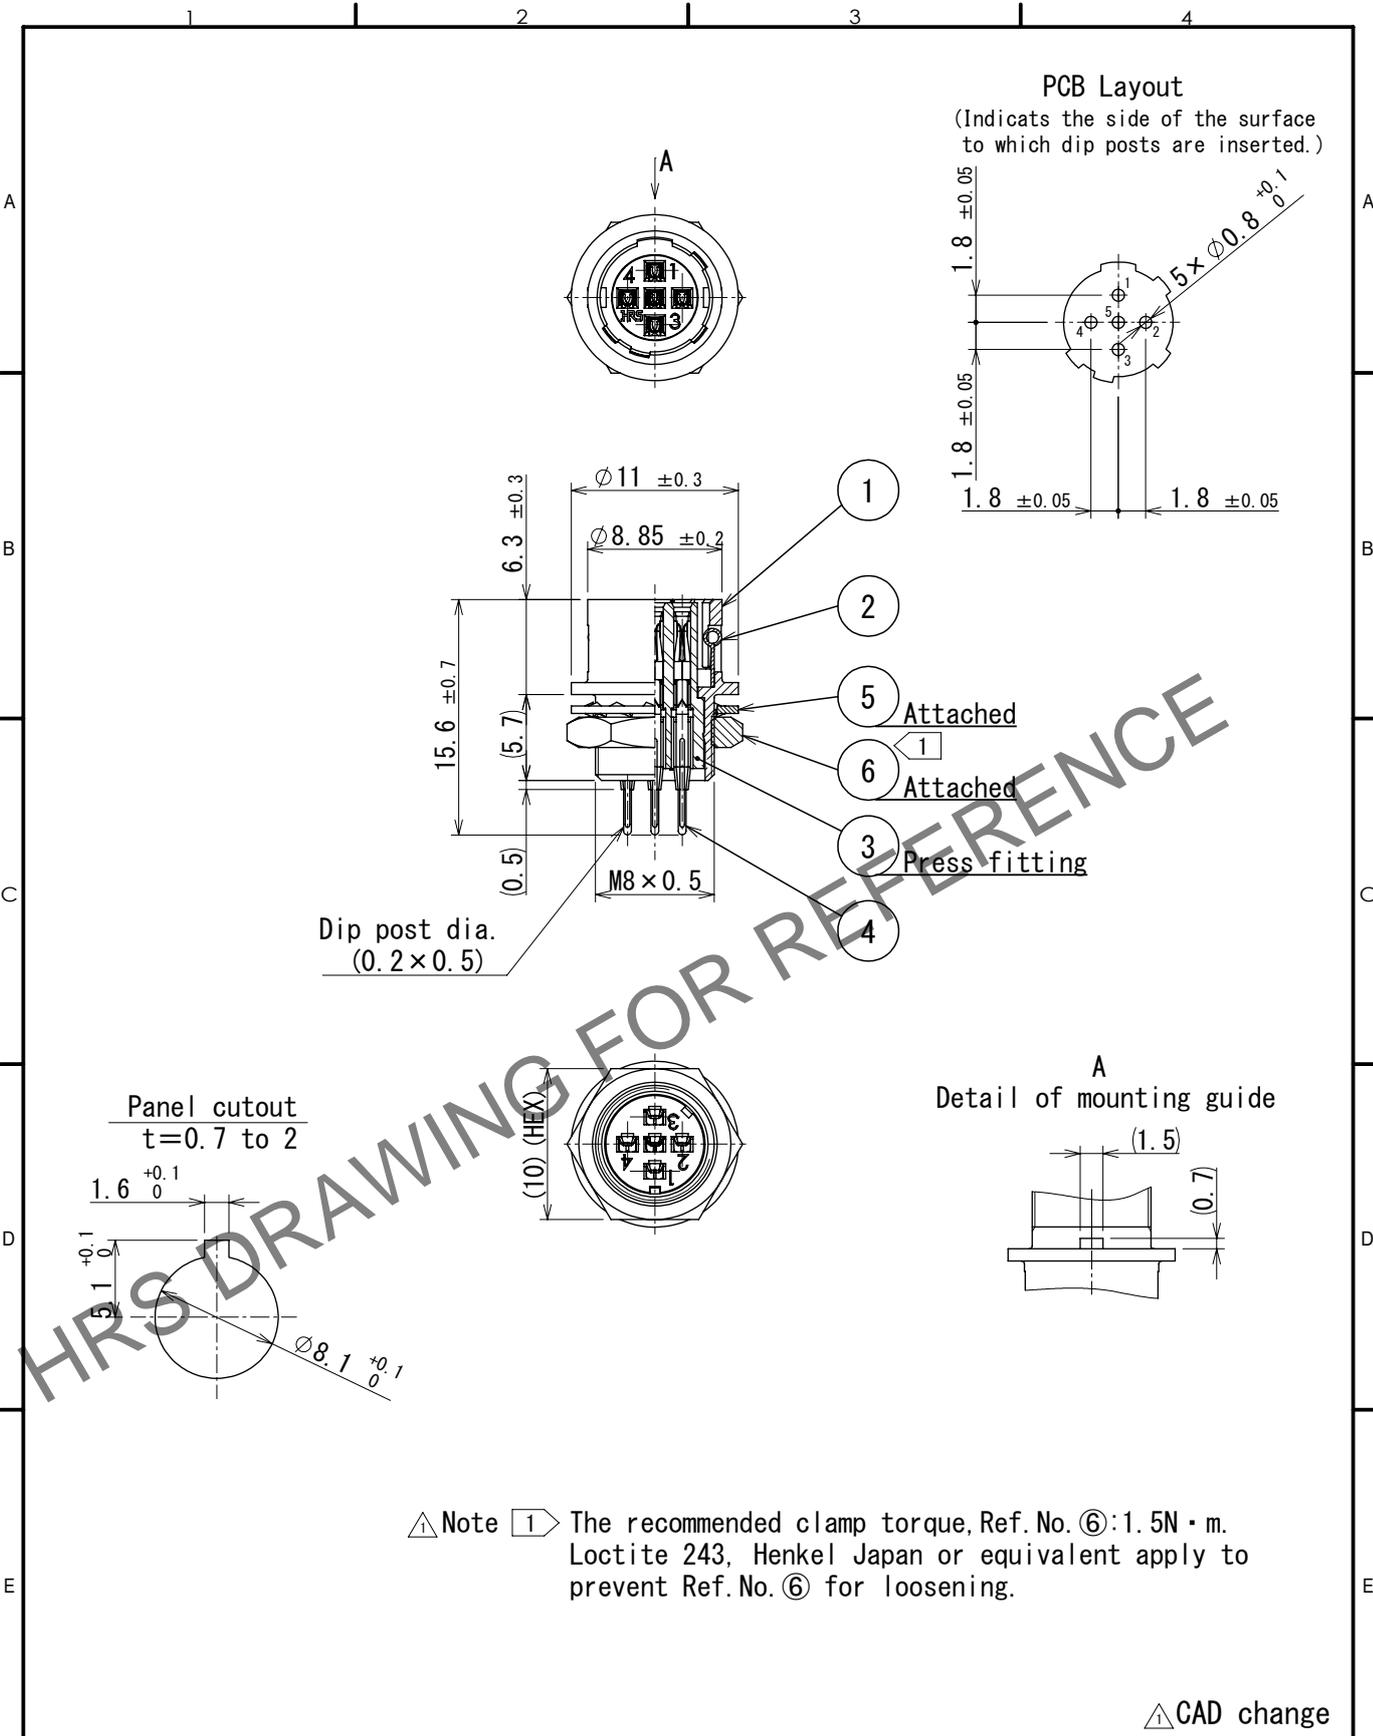

△ Note ① The recommended clamp torque, Ref. No. ⑥: 1.5N · m.  
 Loctite 243, Henkel Japan or equivalent apply to prevent Ref. No. ⑥ for loosening.

△ CAD change

3	Polybutylene terephthlate	(Black) UL94V-0	6	Brass	Nickel plating		
2	Stainless steel		5	Phosphor bronze	Nickel plating		
1	Zinc alloy	Matte finish nickel plated	4	Phosphor bronze	Silver plating 2μm min.		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

HIROSE ELECTRIC CO., LTD.	UNITS mm		SCALE 2:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00020147	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 2025. 06. 10
	APPROVED : MO. SATOH 2007. 03. 08		CHECKED : E.J. KUNII 2007. 03. 08		DESIGNED : TO. HORII 2007. 03. 08		DRAWN : MK. SATO 2007. 03. 08	
DRAWING NO. EDC-025303-73-73					PART NO. HR10A-7R-5SB (73)			
CODE NO. CL0110-0322-2-73					△ 1/1			