




Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

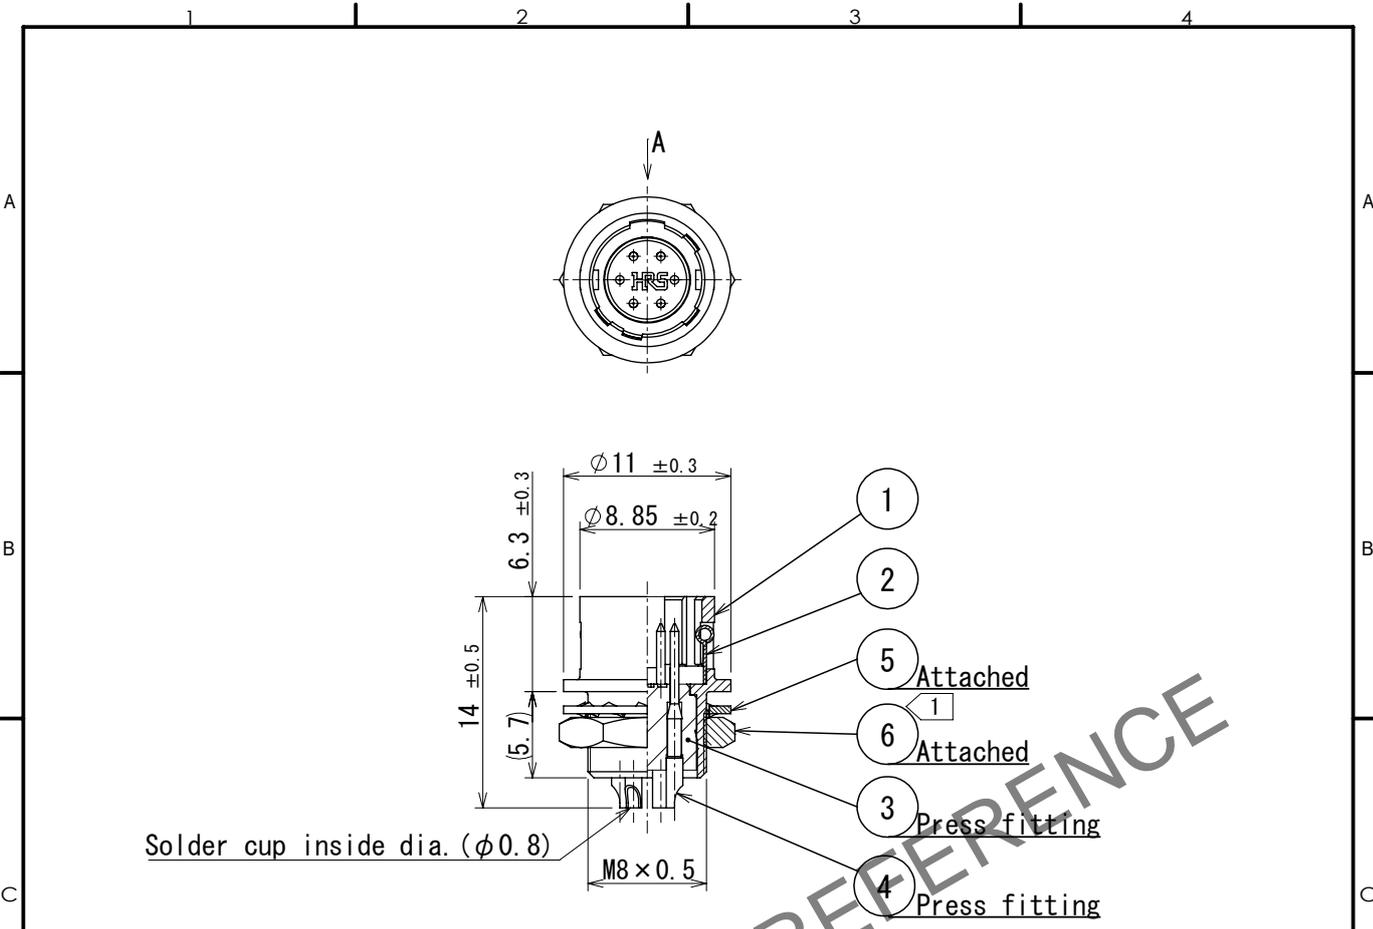

A Detail of mounting guide

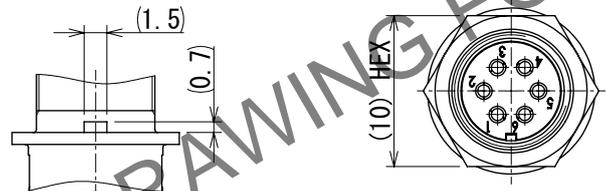

Panel cutout
t=0.7 to 2

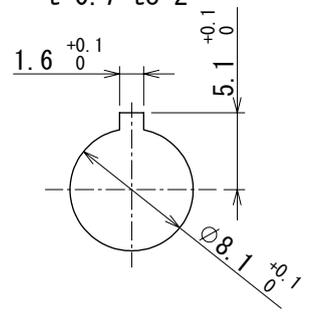

Note ① The recommended clamp torque of Ref.No. ⑥ to be 1.5 N · m.
 ⚠ Loctite 243, Henkel Japan or equivalent apply to prevent Ref.No. ⑥ from loosening.

⚠ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	Polyamide	(Black)	UL94V-0	6	Brass		Nickel plating
2	Stainless steel			5	Phosphor bronze		Nickel plating
1	Zinc alloy	Matte finish	nickel plated	4	Brass		Silver plating 2μm min.

UNITS mm		SCALE 2:1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
			⚠ 2	DIS-C-00019333	HY. KISHI	HY. KOBAYASHI	2025. 02. 25
HIROSE ELECTRIC CO., LTD.		APPROVED :	MO. SATOH	2005. 10. 20	DRAWING NO. EDC-020541-73-73		
		CHECKED :	EJ. KUNII	2005. 10. 20	PART NO. HR10A-7R-6P (73)		
		DESIGNED :	DS. MATSUNE	2005. 10. 19	CODE NO. CL0110-0308-1-73		
		DRAWN :	DS. MATSUNE	2005. 10. 19	1/1		