


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

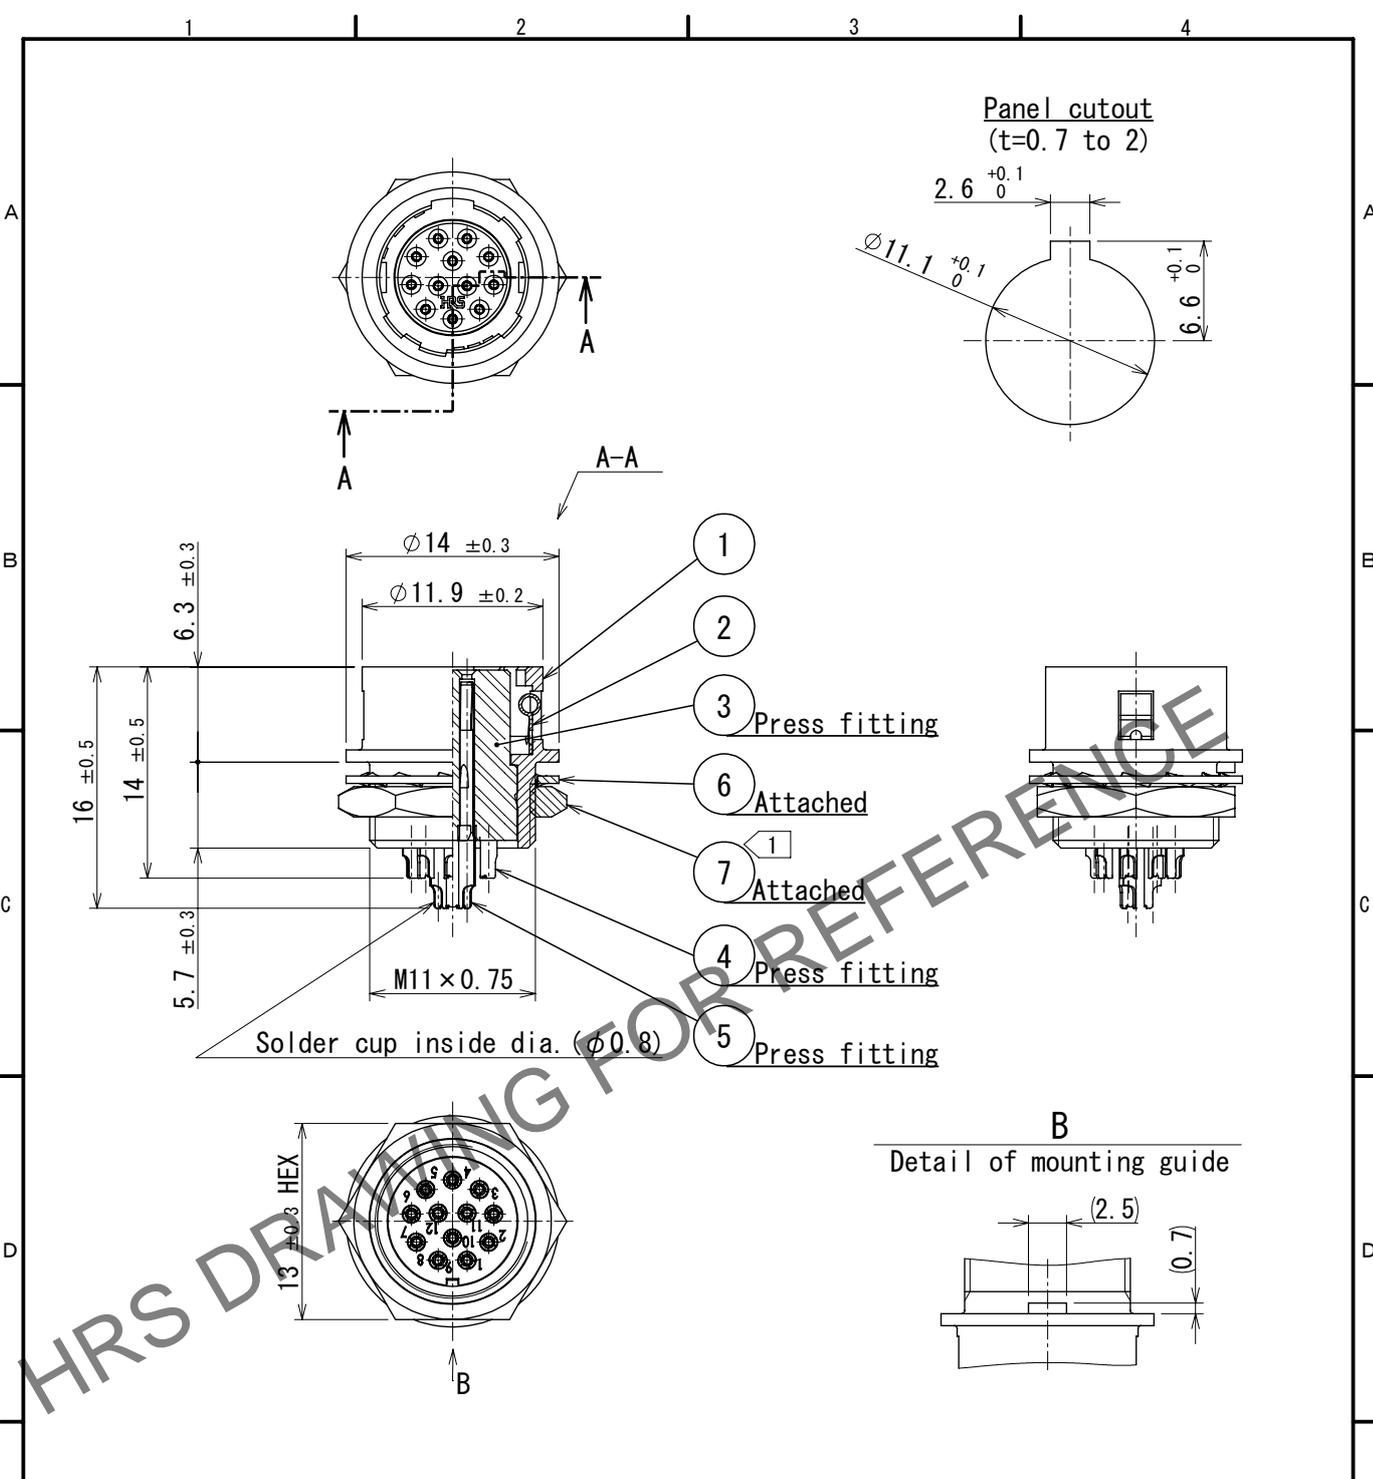

Note ① The recommended clamp torque, Ref. No. ⑦ : 2 N · m.
② Loctite 243, Henkel Japan or equivalent apply to prevent Ref. No. ⑦ for loosening.

CAD change ②

4	Phosphor bronze	Silver plating 2μm min.					
3	Polyamide	(Black) UL94V-0	7	Brass	Nickel plating		
2	Stainless steel		6	Phosphor bronze	Nickel plating		
1	Zinc alloy	Matte finish nickel plated	5	Phosphor bronze	Silver plating 2μm min.		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

	HIROSE ELECTRIC CO., LTD.	SCALE 2:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00021400	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 2026.01.15
		APPROVED : MO. SATOH 2007.03.28	CHECKED : EJ. KUNII 2007.03.28	DESIGNED : TO. HORII 2007.03.27	DRAWN : MK. SATO 2007.03.24	DRAWING NO. EDC-042712-71-71	PART NO. HR10G-10R-12S (71)