

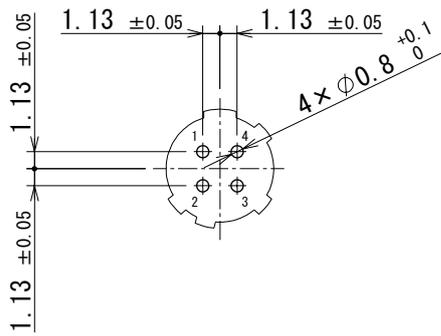
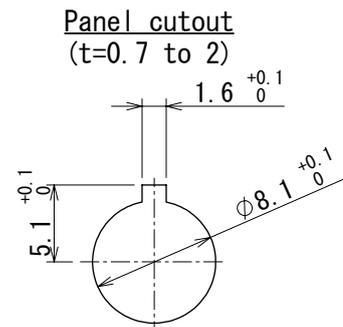
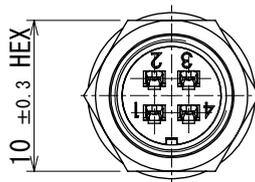
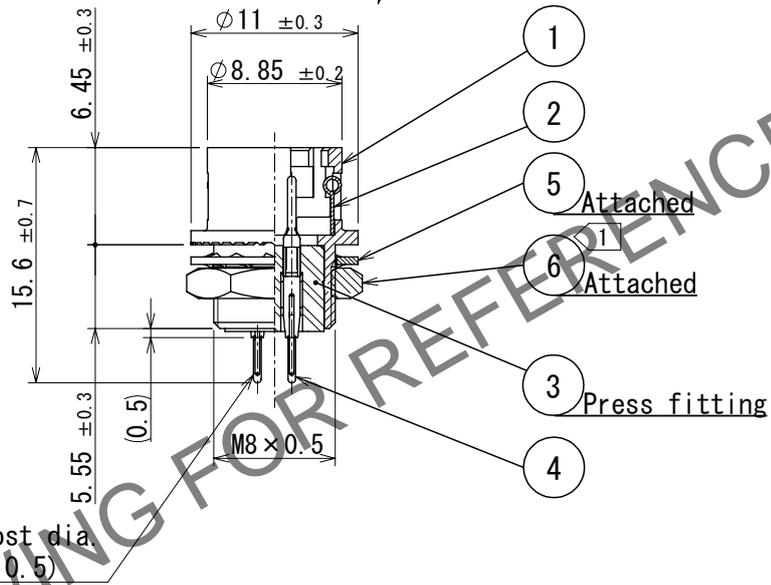


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PCB Layout
 (Indicates the side of the surface to which dip posts are inserted.)

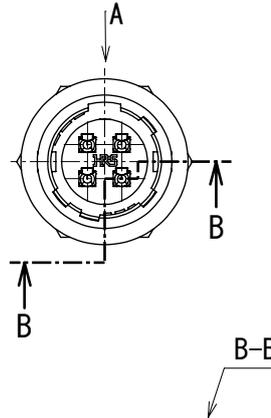

A
 Detail of mounting guide



△ Note ① The recommended clamp torque of Ref.No. ⑥ : 1.5 N · m.
 Loctite 243, Henkel Japan or equivalent apply to prevent Ref.No. ⑥ from loosening.

CAD change △

3	Polybutylene terephthalate	(Black) UL94V-0	6	Brass	Nickel plating		
2	Stainless steel		5	Phosphor bronze	Nickel plating		
1	Zinc alloy	Matte finish nickel plated	4	Phosphor bronze	Silver plating 2μm min.		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

HIROSE ELECTRIC CO., LTD.	UNITS mm		SCALE 2:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00021470	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 2026.01.26
	APPROVED : MR. YOSHIDA 2005.01.05 CHECKED : MO. SATOH 2005.01.05 DESIGNED : YH. YAMADA 2005.01.05 DRAWN : YH. YAMADA 2005.01.05		DRAWING NO. EDC-042749-73-73 PART NO. HR10G-7R-4PB (73) CODE NO. CL0110-1802-3-73		△ 1/1			