

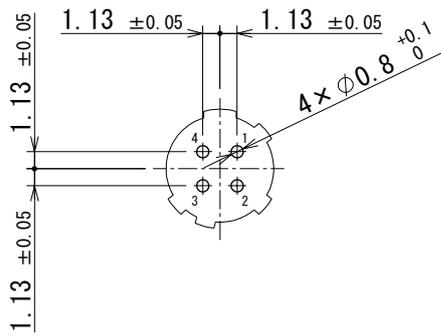
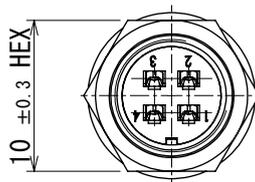
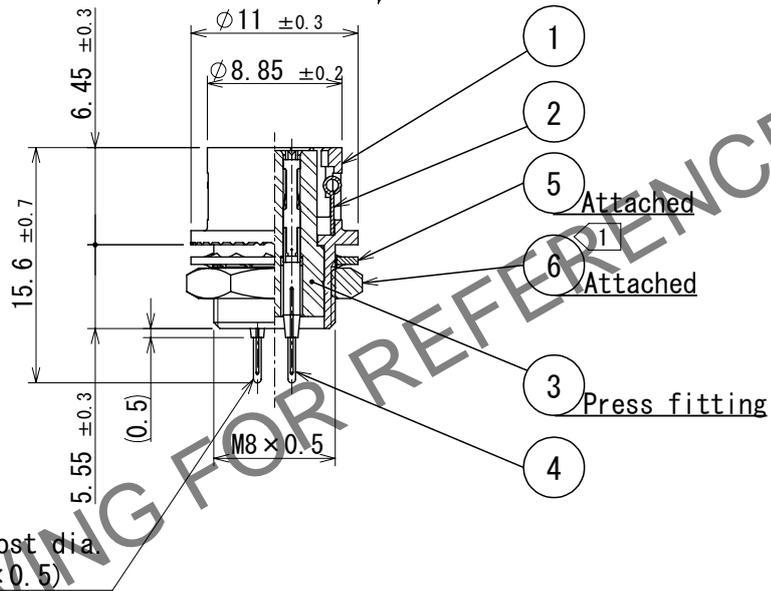


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


PCB Layout
(Indicates the side of the surface to which dip posts are inserted.)

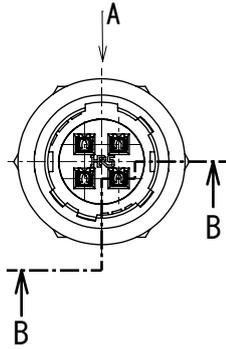

A
Detail of mounting guide



Panel cutout
(t=0.7 to 2)

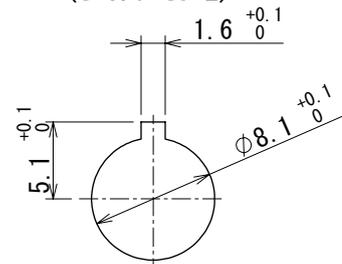

△ Note ① The recommended clamp torque of Ref.No. ⑥ : 1.5 N · m.
Loctite 243, Henkel Japan or equivalent apply to prevent Ref.No. ⑥ from loosening.

CAD change △

3	Polybutylene terephthalate	(Black) UL94V-0	6	Brass	Nickel plating		
2	Stainless steel		5	Phosphor bronze	Nickel plating		
1	Zinc alloy	Matte finish nickel plated	4	Phosphor bronze	Silver plating 2μm min.		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

	HIROSE ELECTRIC CO., LTD.	APPROVED : MR. YOSHIDA 2005.01.05	DRAWING NO. EDC-042748-73-73
		CHECKED : MO. SATOH 2005.01.05	
DESIGNED : YH. YAMADA 2005.01.05	CODE NO. CL0110-1801-0-73		
DRAWN : YH. YAMADA 2005.01.05		1/1	