


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

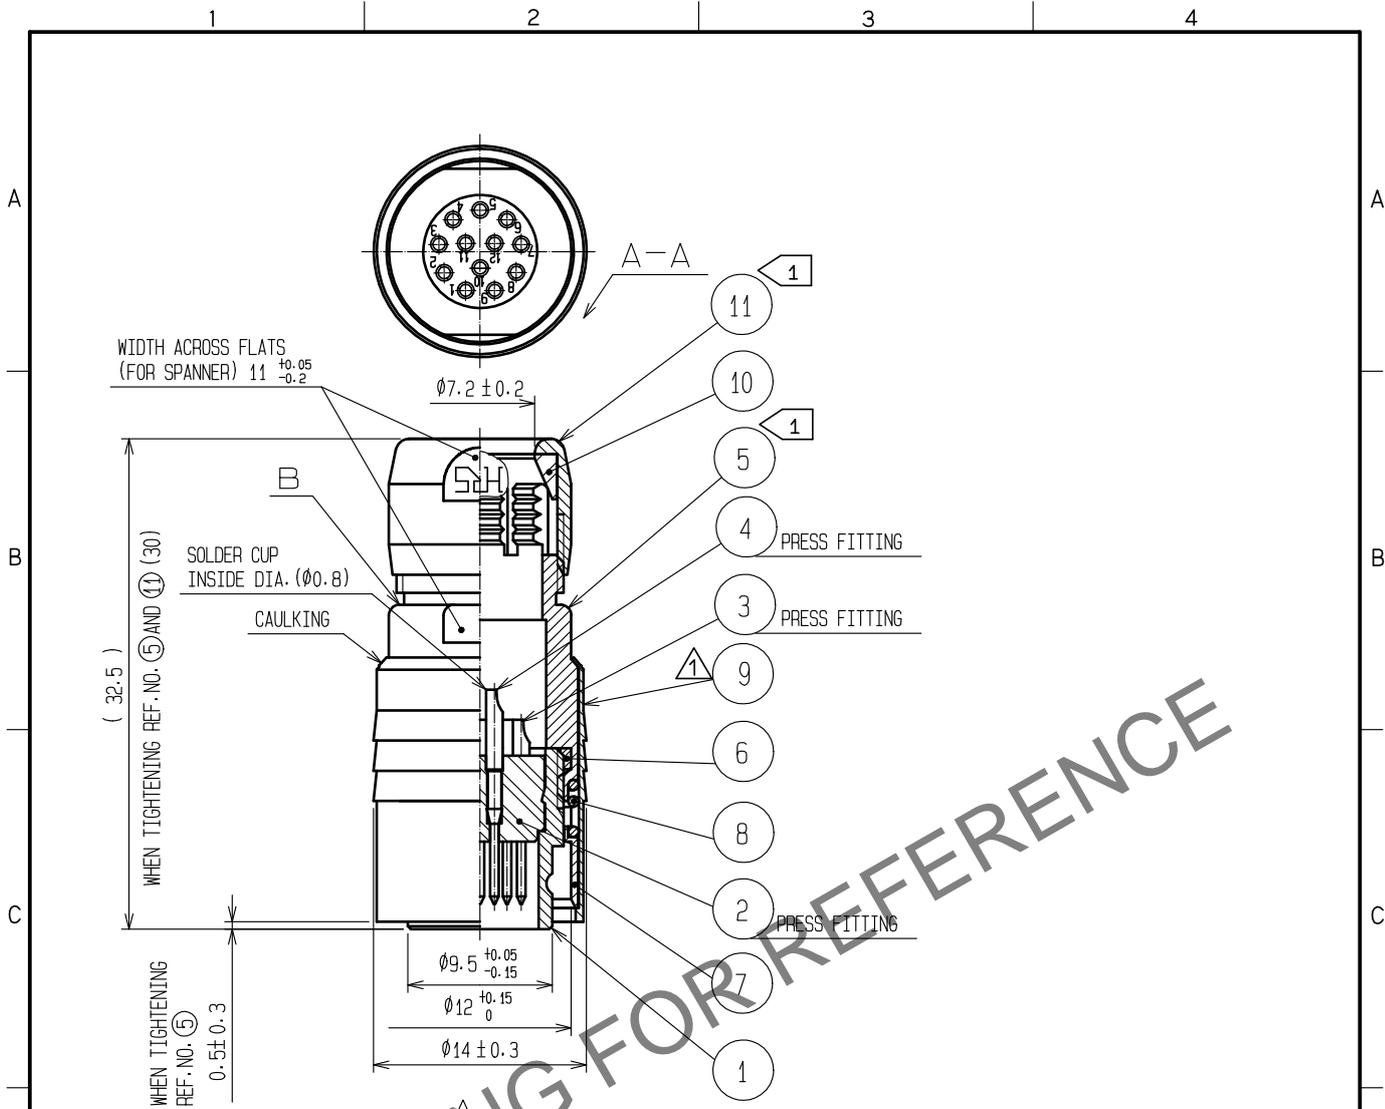

HRS DRAWING FOR REFERENCE

- NOTES
- ① THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑤ AND ⑪ : 2 N·m.
 - △ THREAD LOCKER TO THE THREADED PORTION OF REF. NO. ① APPLIES TO PREVENT REF. NO. ⑤ FROM LOSING.
 RECOMMENDED THREAD LOCKER: LOCTITE 263, HENKEL JAPAN LTD.
 REF. NO. ⑪ SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.
 - 2 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ⑤ AND ⑪ ARE SHOWN.
 - △ 3 THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0355-00.

6	POLYAMIDE				
5	BRASS	MATTE FINISH NICKEL PLATED	11	BRASS	MATTE FINISH NICKEL PLATED
4	BRASS	GOLD PLATING 0.2μm min. NICKEL UNDER PLATING 2μm min.	10	POLYAMIDE	
3	BRASS		9	BRASS	MATTE FINISH NICKEL PLATED
2	POLYAMIDE	(BLUE)	8	STEEL	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	7	STAINLESS STEEL	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	2	DIS-C-00016940	HT. ZENBA	EJ. KUNII	20240214
HIROSE ELECTRIC CO., LTD.			APPROVED : MO. SATOH 20051024 CHECKED : EJ. KUNII 20051021 DESIGNED : DS. MATSUNE 20051019 DRAWN : DS. MATSUNE 20051019	DRAWING NO. EDC4-007760-73 PART NO. HR10-10P-12P(73) CODE NO. CL0110-0025-7-73	1/1	