


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△					
△					△					
△					△					

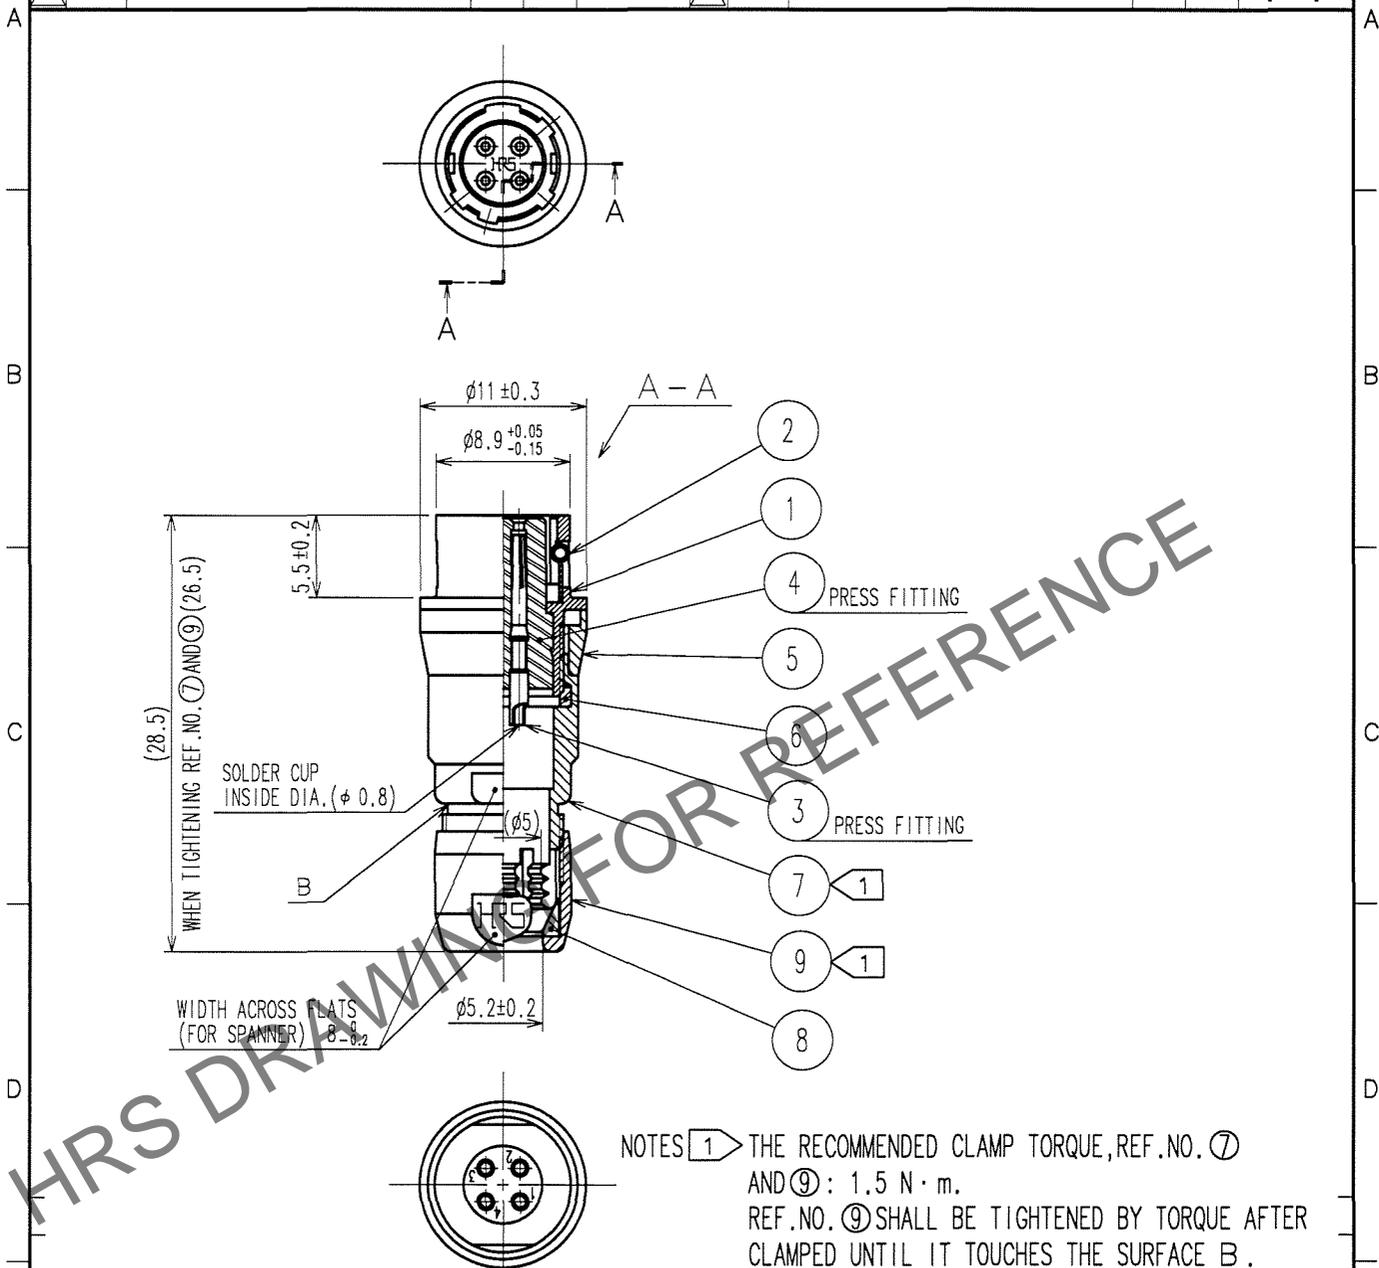

NOTES 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑦ AND ⑨: 1.5 N·m.  
REF. NO. ⑨ SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.  
2 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ⑦ AND ⑨ ARE SHOWN.

4	POLYAMIDE	(BLUE)	9	BRASS	MATTE FINISH NICKEL PLATED
3	BERYLLIUM COPPER	GOLD PLATING 0.2μm min. NICKEL UNDER PLATING 2μm min.	8	POLYAMIDE	
2	STAINLESS STEEL		7	BRASS	MATTE FINISH NICKEL PLATED
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	POLYAMIDE	
			5	BRASS	MATTE FINISH NICKEL PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN <i>D. Matsume</i> 05.11.19	DESIGNED <i>D. Matsume</i> 05.11.19	CHECKED <i>E. Kunii</i> 05.11.22	APPROVED <i>M. Sato</i> 05.11.24	RELEASED
DRAWING NO. EDC4-007762-73		PART NO. HR10-7J-4S(73)				
SCALE 2 : 1		CODE NO. CL110-0027-2-73				1/1
UNITS mm		HRS HIROSE ELECTRIC CO., LTD.				

TO
R