


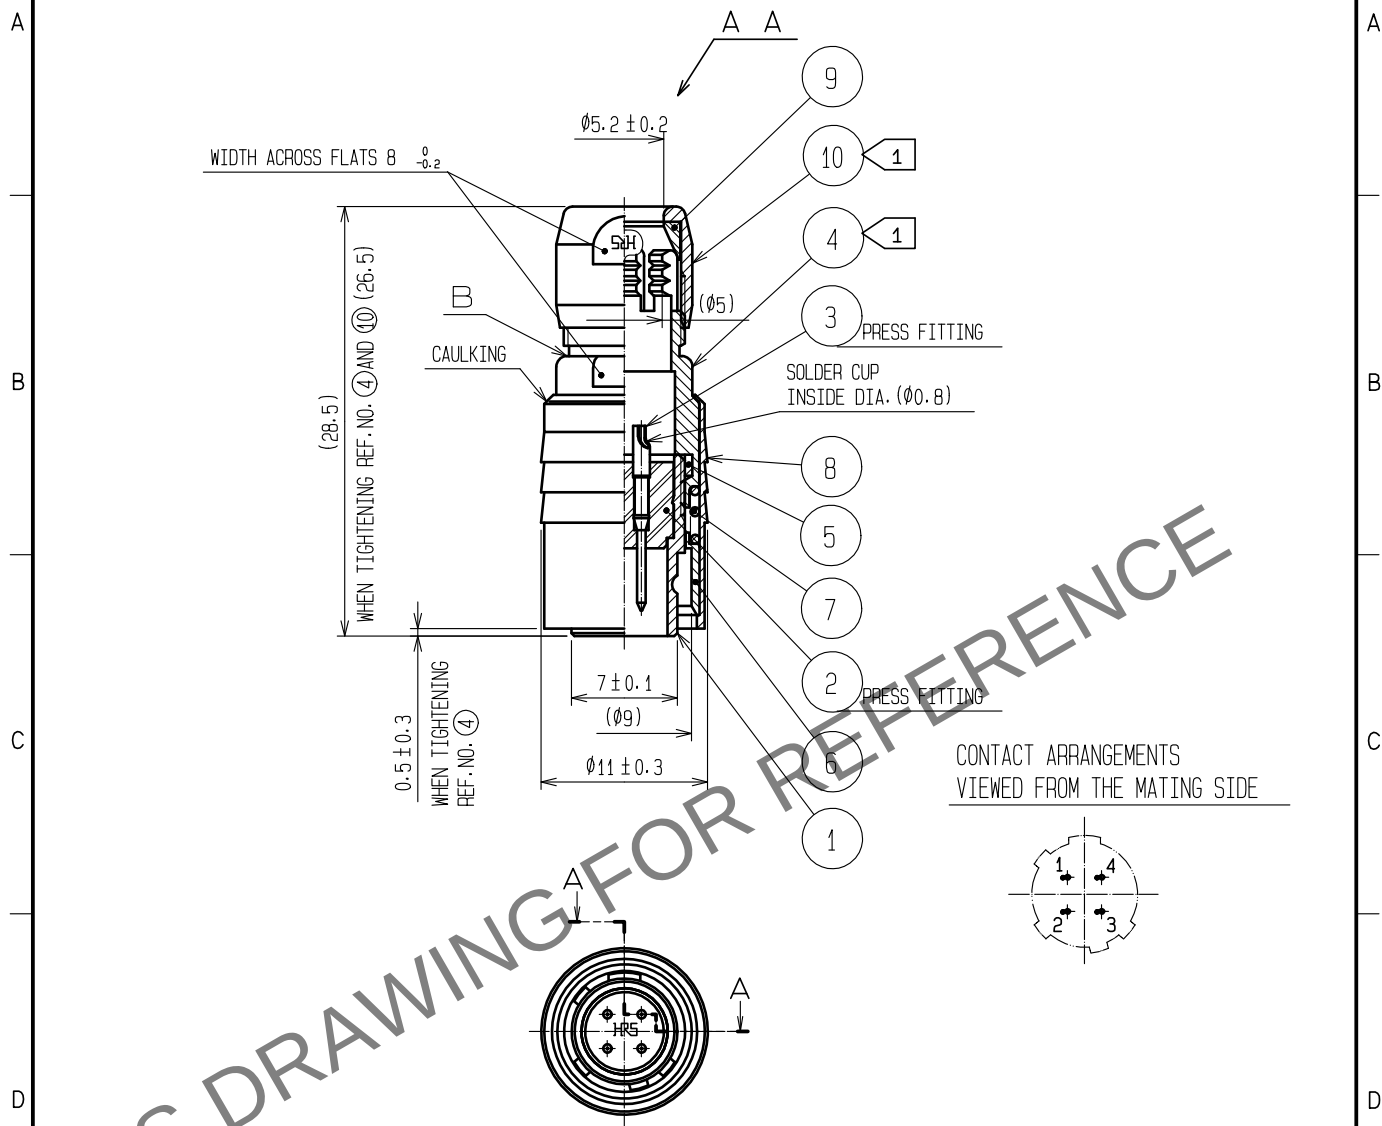

- NOTES
- 1 THE RECOMMENDED CLAMP TORQUE, REF.NO. ④ AND ⑩ : 1.5 N·m.
1 THREAD LOCKER TO THE THREADED PORTION OF REF.NO. ① APPLIES TO PREVENT REF.NO. ④ FROM LOOSING.
RECOMMENDED THREAD LOCKER: LOCTITE 263, HENKEL JAPAN LTD.
REF.NO. ⑩ SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.
 - 2 ONE EXAMPLE OF THE ROTATION OF REF.NO. ①, ④ AND ⑩ IS SHOWN.
 - 3 THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0355-00.

5	POLYAMIDE				
4	BRASS	MATTE FINISH NICKEL PLATING	10	BRASS	MATTE FINISH NICKEL PLATING
3	BRASS	GOLD PLATING 0.2µm min. NICKEL UNDER PLATING 2µm min.	9	POLYAMIDE	
2	POLYAMIDE	(BLUE)	8	BRASS	MATTE FINISH NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	7	STEEL	NICKEL PLATING
6	STAINLESS STEEL				
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm					
SCALE 2 : 1		COUNT 2	DESCRIPTION OF REVISIONS		DESIGNED HT. ZENBA
			DIS-C-00016940		CHECKED EJ. KUNII
					DATE 20240214
APPROVED :MR. YOSHIDA			20050105	DRAWING NO. EDC4-007756-73	
CHECKED :MO. SATOH			20050105	PART NO. HR10-7P-4P(73)	
DESIGNED :YH. YAMADA			20050105	CODE NO. CL0110-0021-6-73	
DRAWN :YH. YAMADA			20050105		