


Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1			2			3			4					
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△					△				
△					△					△				
△					△					△				

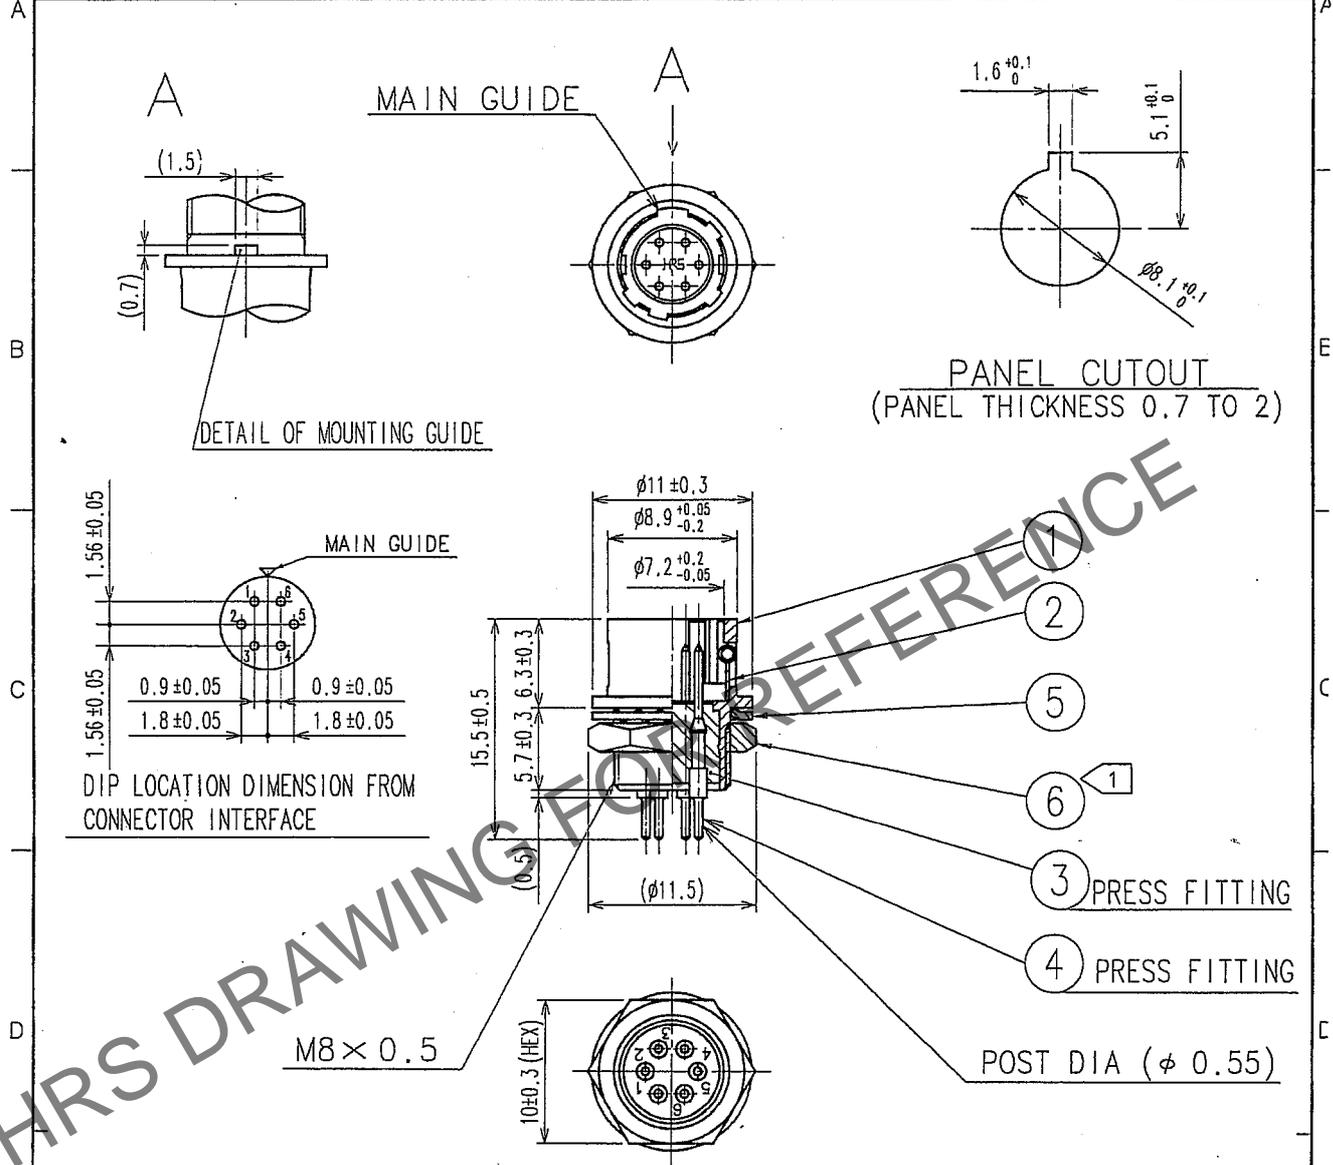

NOTE: ① THE RECOMMENDED TIGHTEN TORQUE OF REF.NO. ⑥ : 1.5 N · m.
ADHESIVE LOCTITE 242, HENKEL JAPAN LOCTITE OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO. ⑥ FROM LOOSENING.

3	POLYAMIDE	(BLUE)	6	BRASS	NICKEL PLATED
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATED
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BRASS	OVERPLATING : GOLD 0.2µm min UNDERPLATING : NICKEL 2.0µm min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	T.SUZUKI	y.yamada	R. Egawa	M. Sento	
	06.07.22	06.07.22	06.07.22	06.07.22	

TO
R

 SCALE 2 : 1 UNITS mm	DRAWING NO. EDC4-025293-73 HRS HIROSE ELECTRIC CO., LTD.	PART NO. HR10-7R-6PA(73) CODE NO. CL110-0061-0-73	<table border="1"> <tr> <td>1</td> <td>1</td> </tr> </table>	1	1
1	1				