


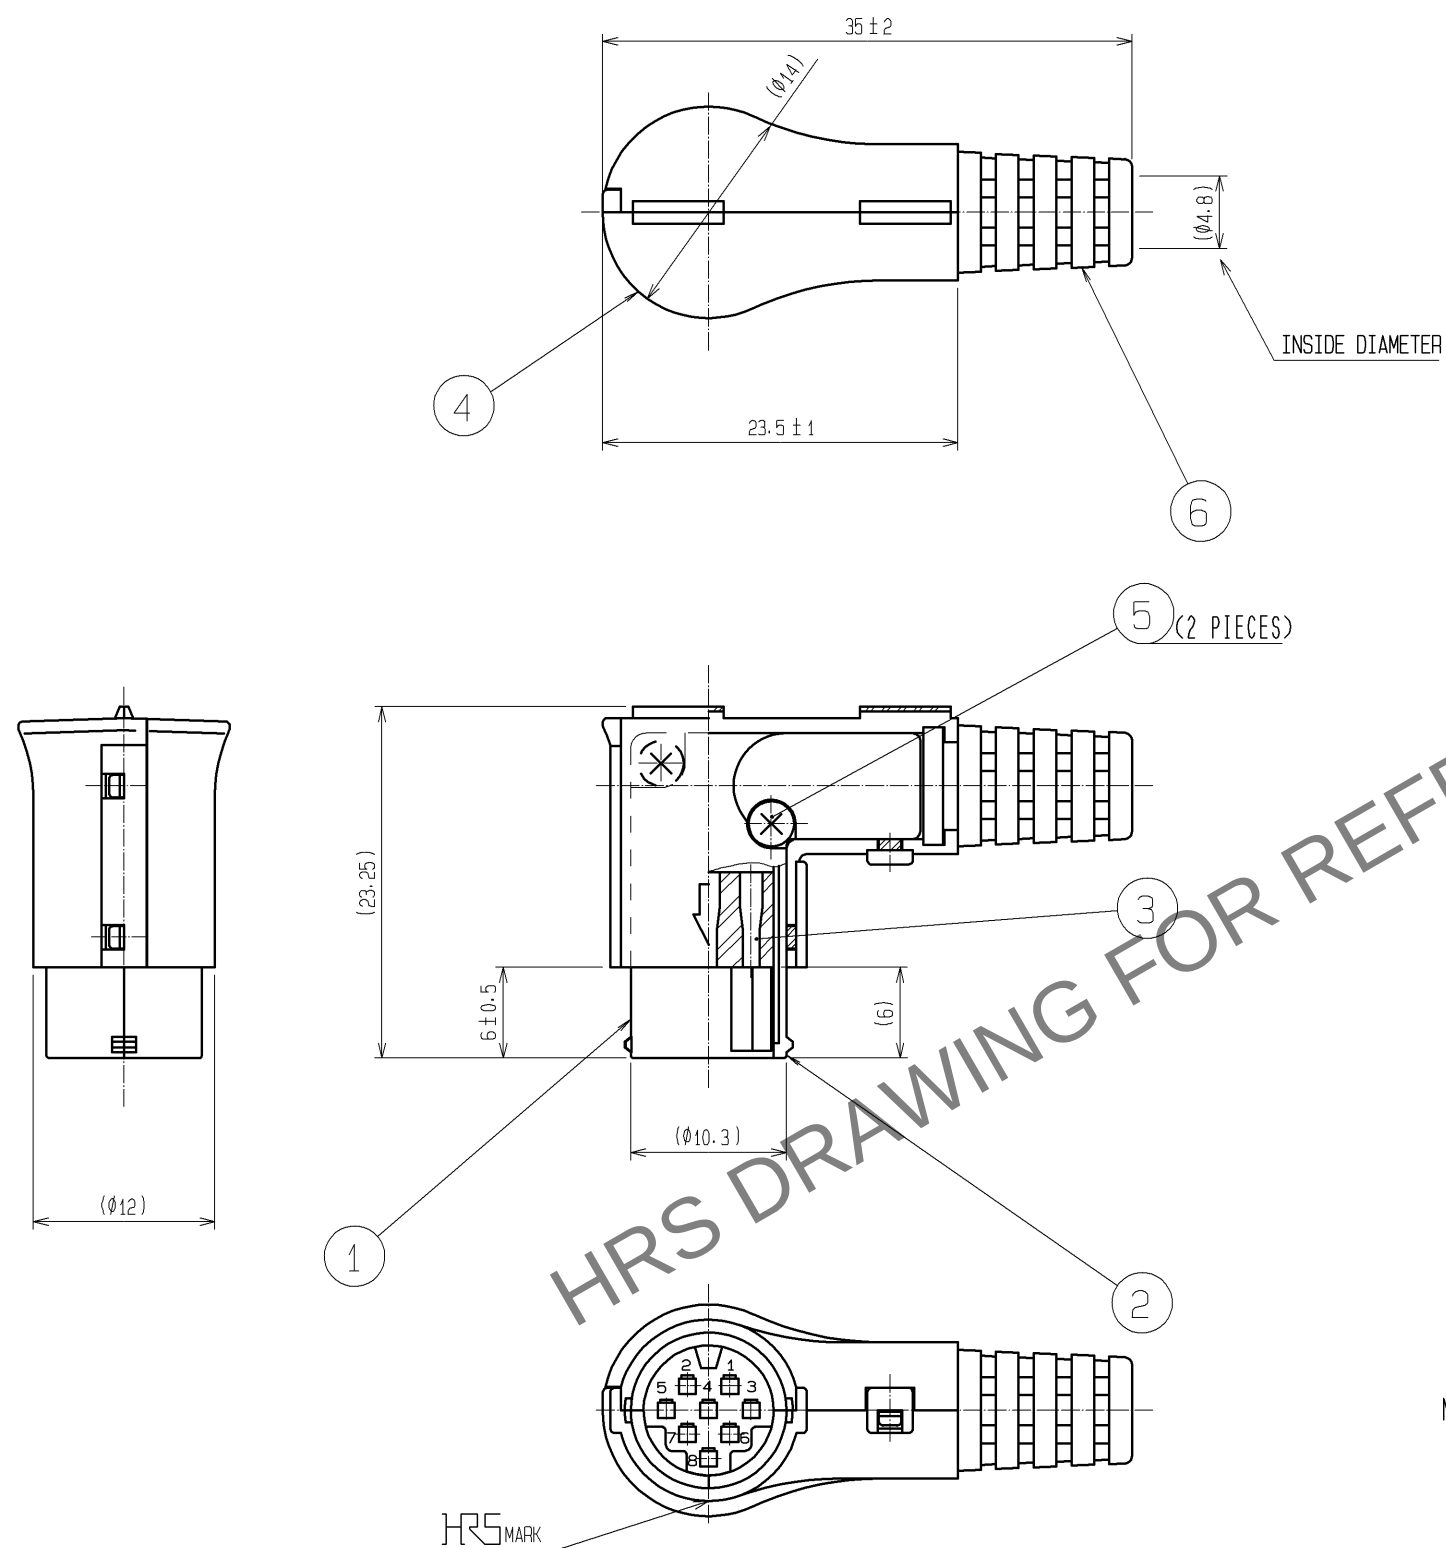


NOTES 1 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,
DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

2 APPLICABLE CRIMP CONTACT : HR10-PC-113(APPLICABLE WIRE AWG#26 TO #30)

3 EXTRACTION TOOL : RP6-SC-TP

4 COMPONENTS ARE PACKED SEPARATELY.

3	PBT	(BLACK) UL94V-0	6	PVC	(BLACK) UL94V-0					
2	ZINC ALLOY	NICKEL PLATING	5	STEEL	NICKEL PLATING TAPPING SCREW M2X4					
1	ZINC ALLOY	NICKEL PLATING	4	PP	(BLACK) UL94V-0					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII		12. 06. 06		DRAWING NO. EDC3-044664-71				
		CHECKED : EJ. KUNII		12. 06. 06		PART NO. HR212-10LP-8PC(71)				
		DESIGNED : HY. KISHI		12. 06. 06		CODE NO. CL112-4101-8-71				
		DRAWN : HY. KISHI		12. 06. 06		 1/				