

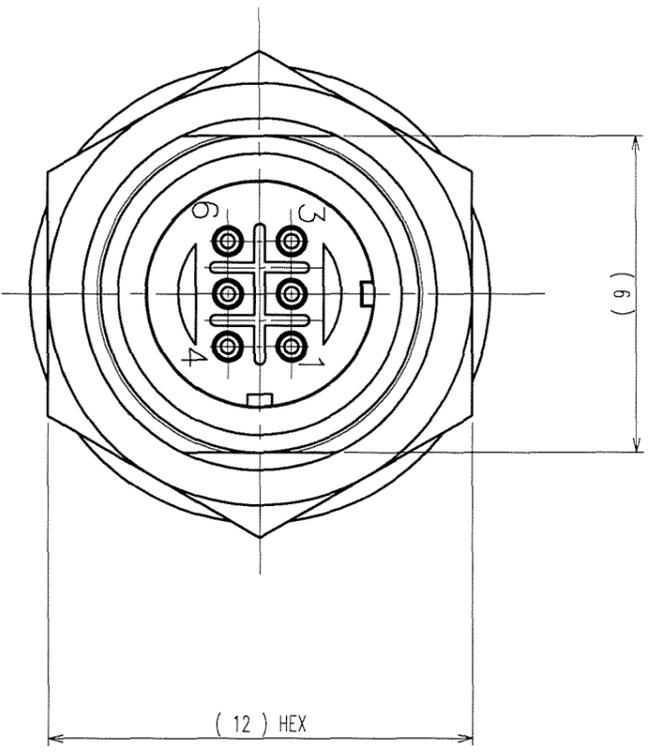
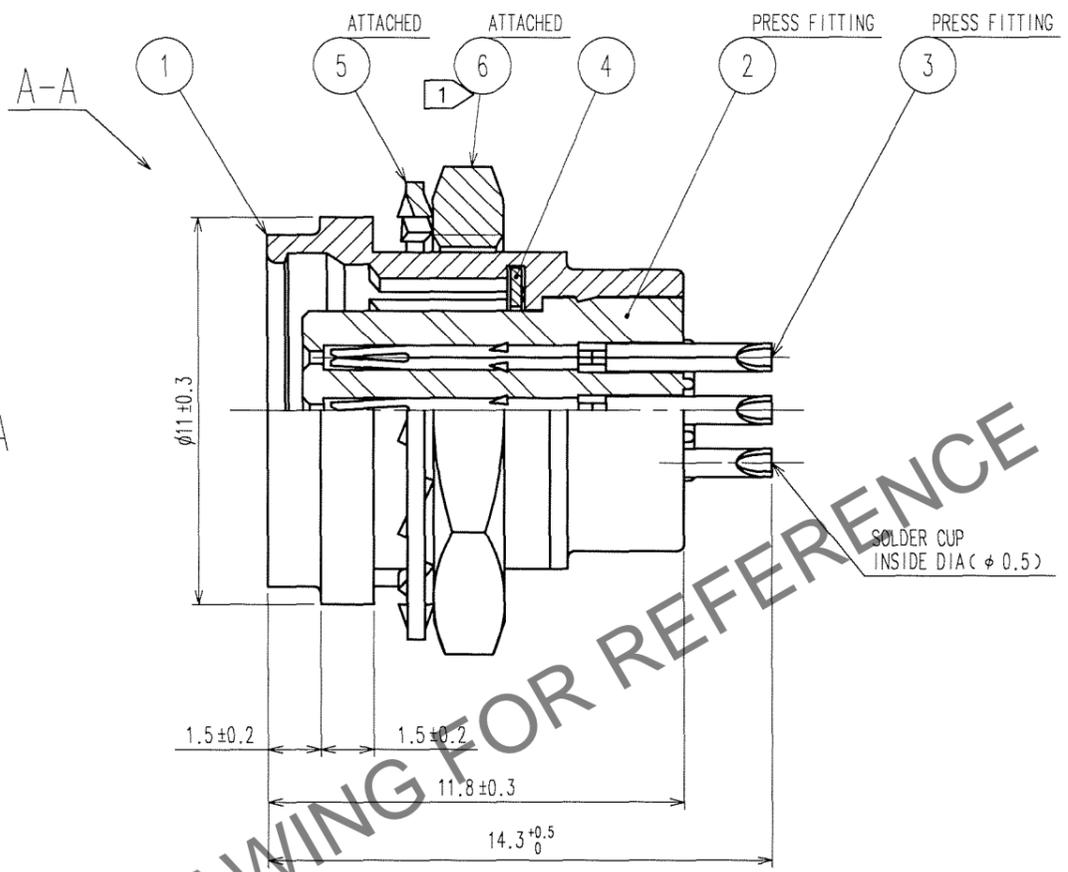


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					

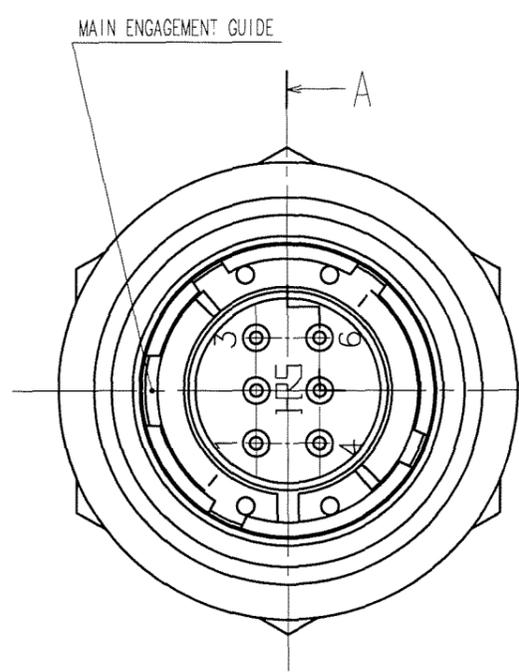

PANEL CUTOUT  
PANEL THICKNESS : 0.7~2

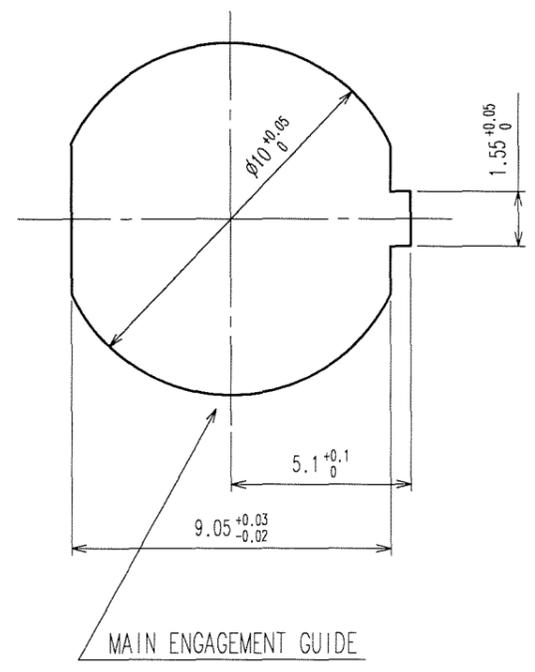

HRS DRAWING FOR REFERENCE

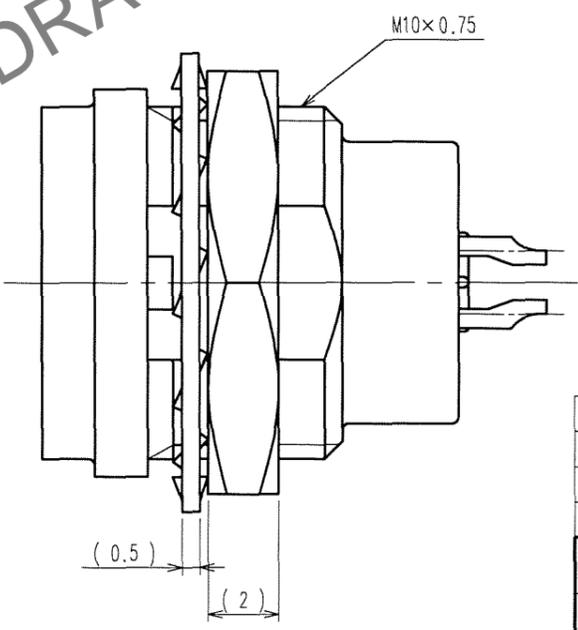

- NOTES
- ① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑥ TO BE 1 N·m.  
COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.
  - ② CONTACT AREA : GOLD 0.2μm min.  
TERMINAL AREA : GOLD FLASH.  
UNDER PLATING : NICKEL 2μm min

3	PHOSPHOR BRONZE	②	6	BRASS ①	NICKEL PLATED
2	PPS	(BLACK) 94V-0	5	PHOSPHOR BRONZE	NICKEL PLATED
1	ZINC ALLOY	MATE FINISH NICKEL PLATED	4	BERYLLIUM COPPER	NICKEL PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		Y.YAMADA	Y.YAMADA	T.AKIYAMA	M.SATO	
		'05 11 05	'05 11 05	'05 11 05	'05 11 05	

SCALE	5 : 1	DRAWING NO.	EDC3-114769	PART NO.	HR25A-7R-6S
UNITS	mm	<b>HRS</b>	HIROSE ELECTRIC CO., LTD	CODE NO.	CL125-0603-0

TO
R

1/1