

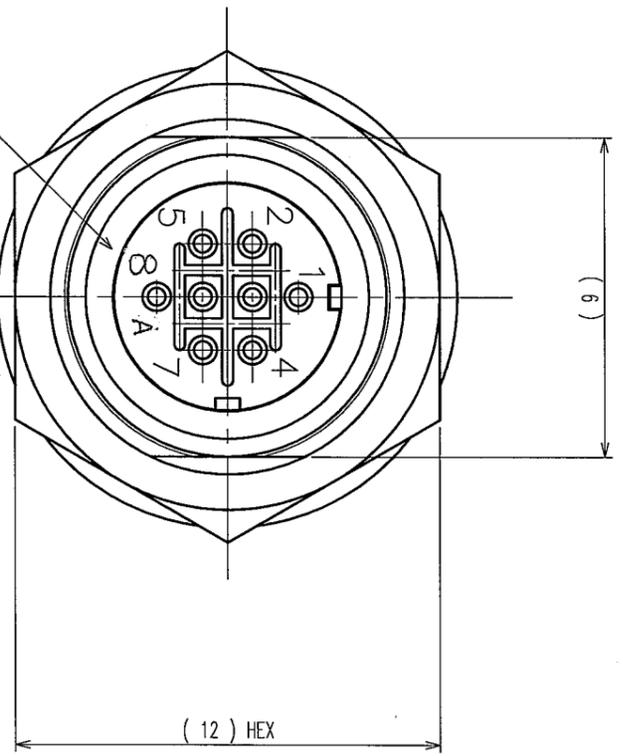
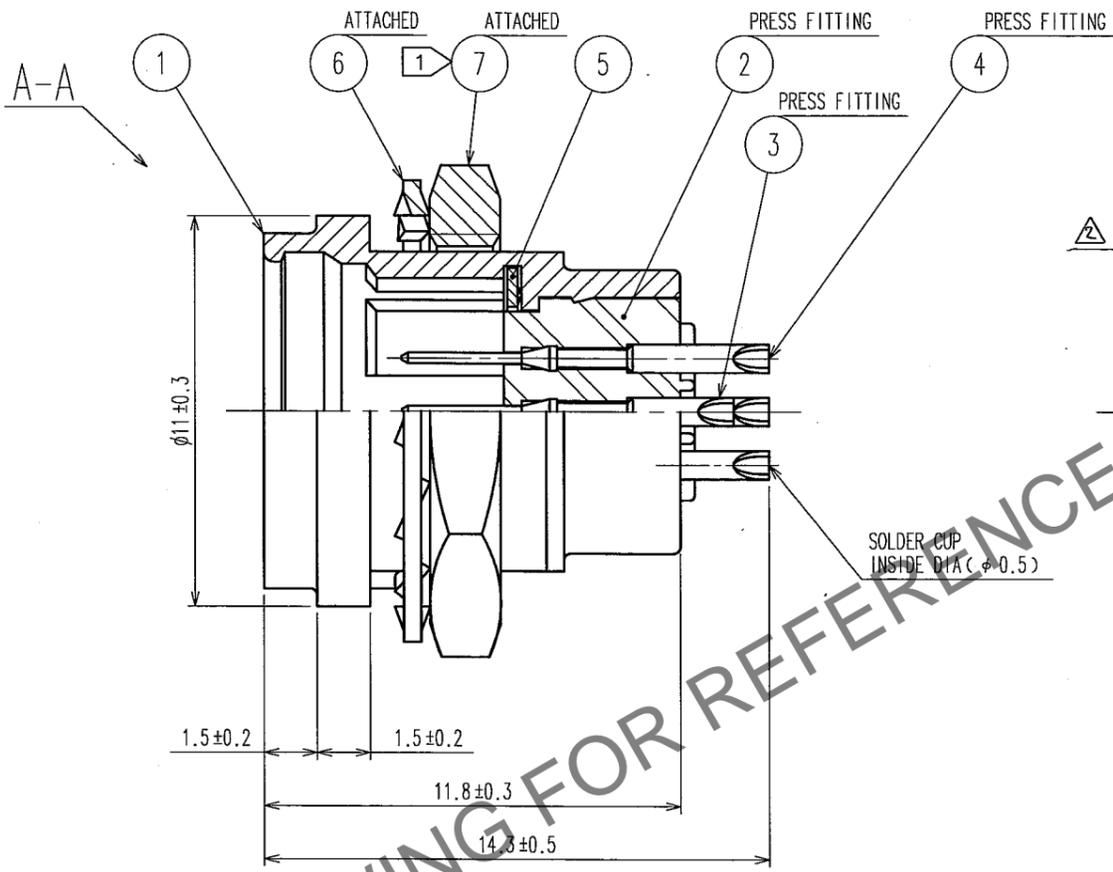
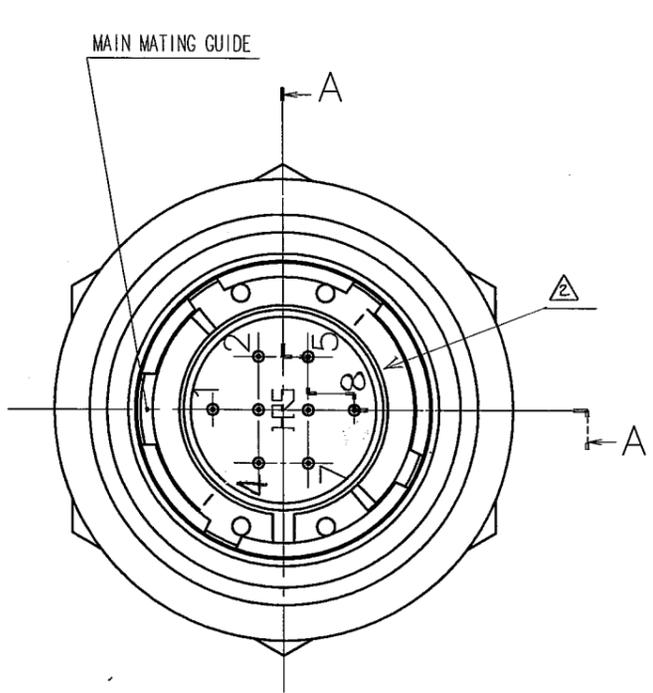


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					
2	DIS-C-001353	H.K	M.S	09.06.26					

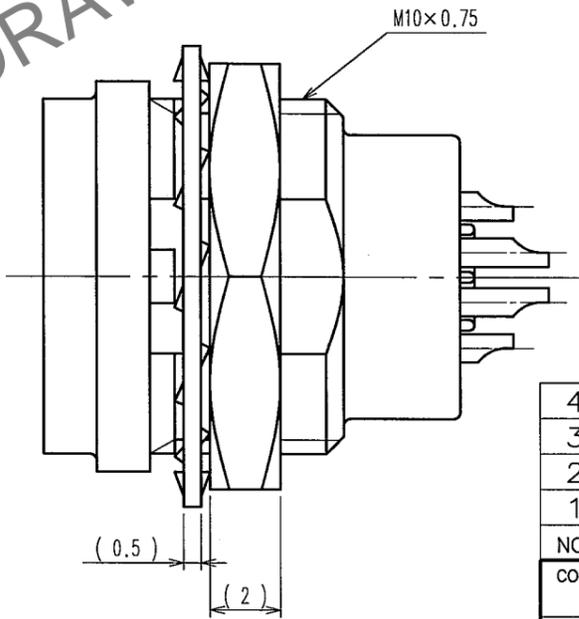

PANEL CUTOUT  
 PANEL THICKNESS: 0.7 TO 2

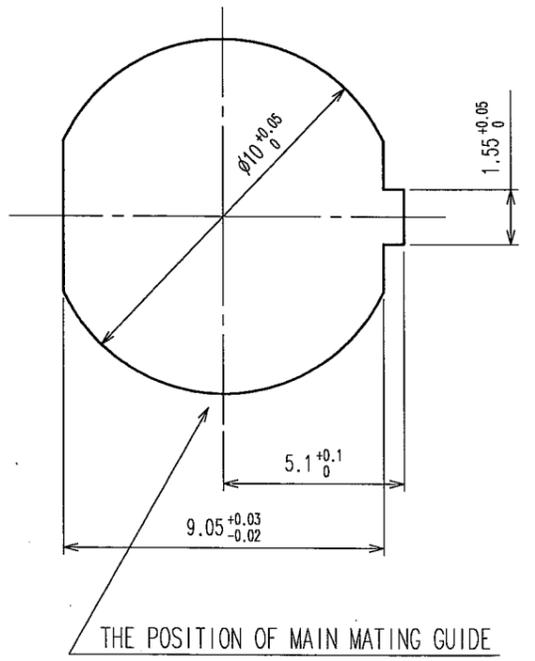

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑦ TO BE 1 N·m.  
 COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.  
 ② OVER PLATING : GOLD 0.2μ m min.  
 UNDER PLATING : NICKEL 2μ m min.

4	PHOSPHOR BRONZE	②	7	BRASS	△	NICKEL PLATING
3	PHOSPHOR BRONZE	②	6	PHOSPHOR BRONZE		NICKEL PLATING
2	POLYPHENYLENE SULFIDE (BLACK) 94V-0		5	BERYLLIUM COPPER		NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	

CODE NO. (OLD) CL	DRAWN M.SATO '06 09 20	DESIGNED Y.YAMADA '06 09 21	CHECKED E.EZAWA '06 09 21	APPROVED M.SATO '06 09 21	RELEASED ..
SCALE 5 : 1 UNITS mm	DRAWING NO. EDC3-115062	PART NO. HR25A-7R-8P	CODE NO. CL125-0620-0-00		
HRS HIROSE ELECTRIC CO., LTD					1/1

TO
R