


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					

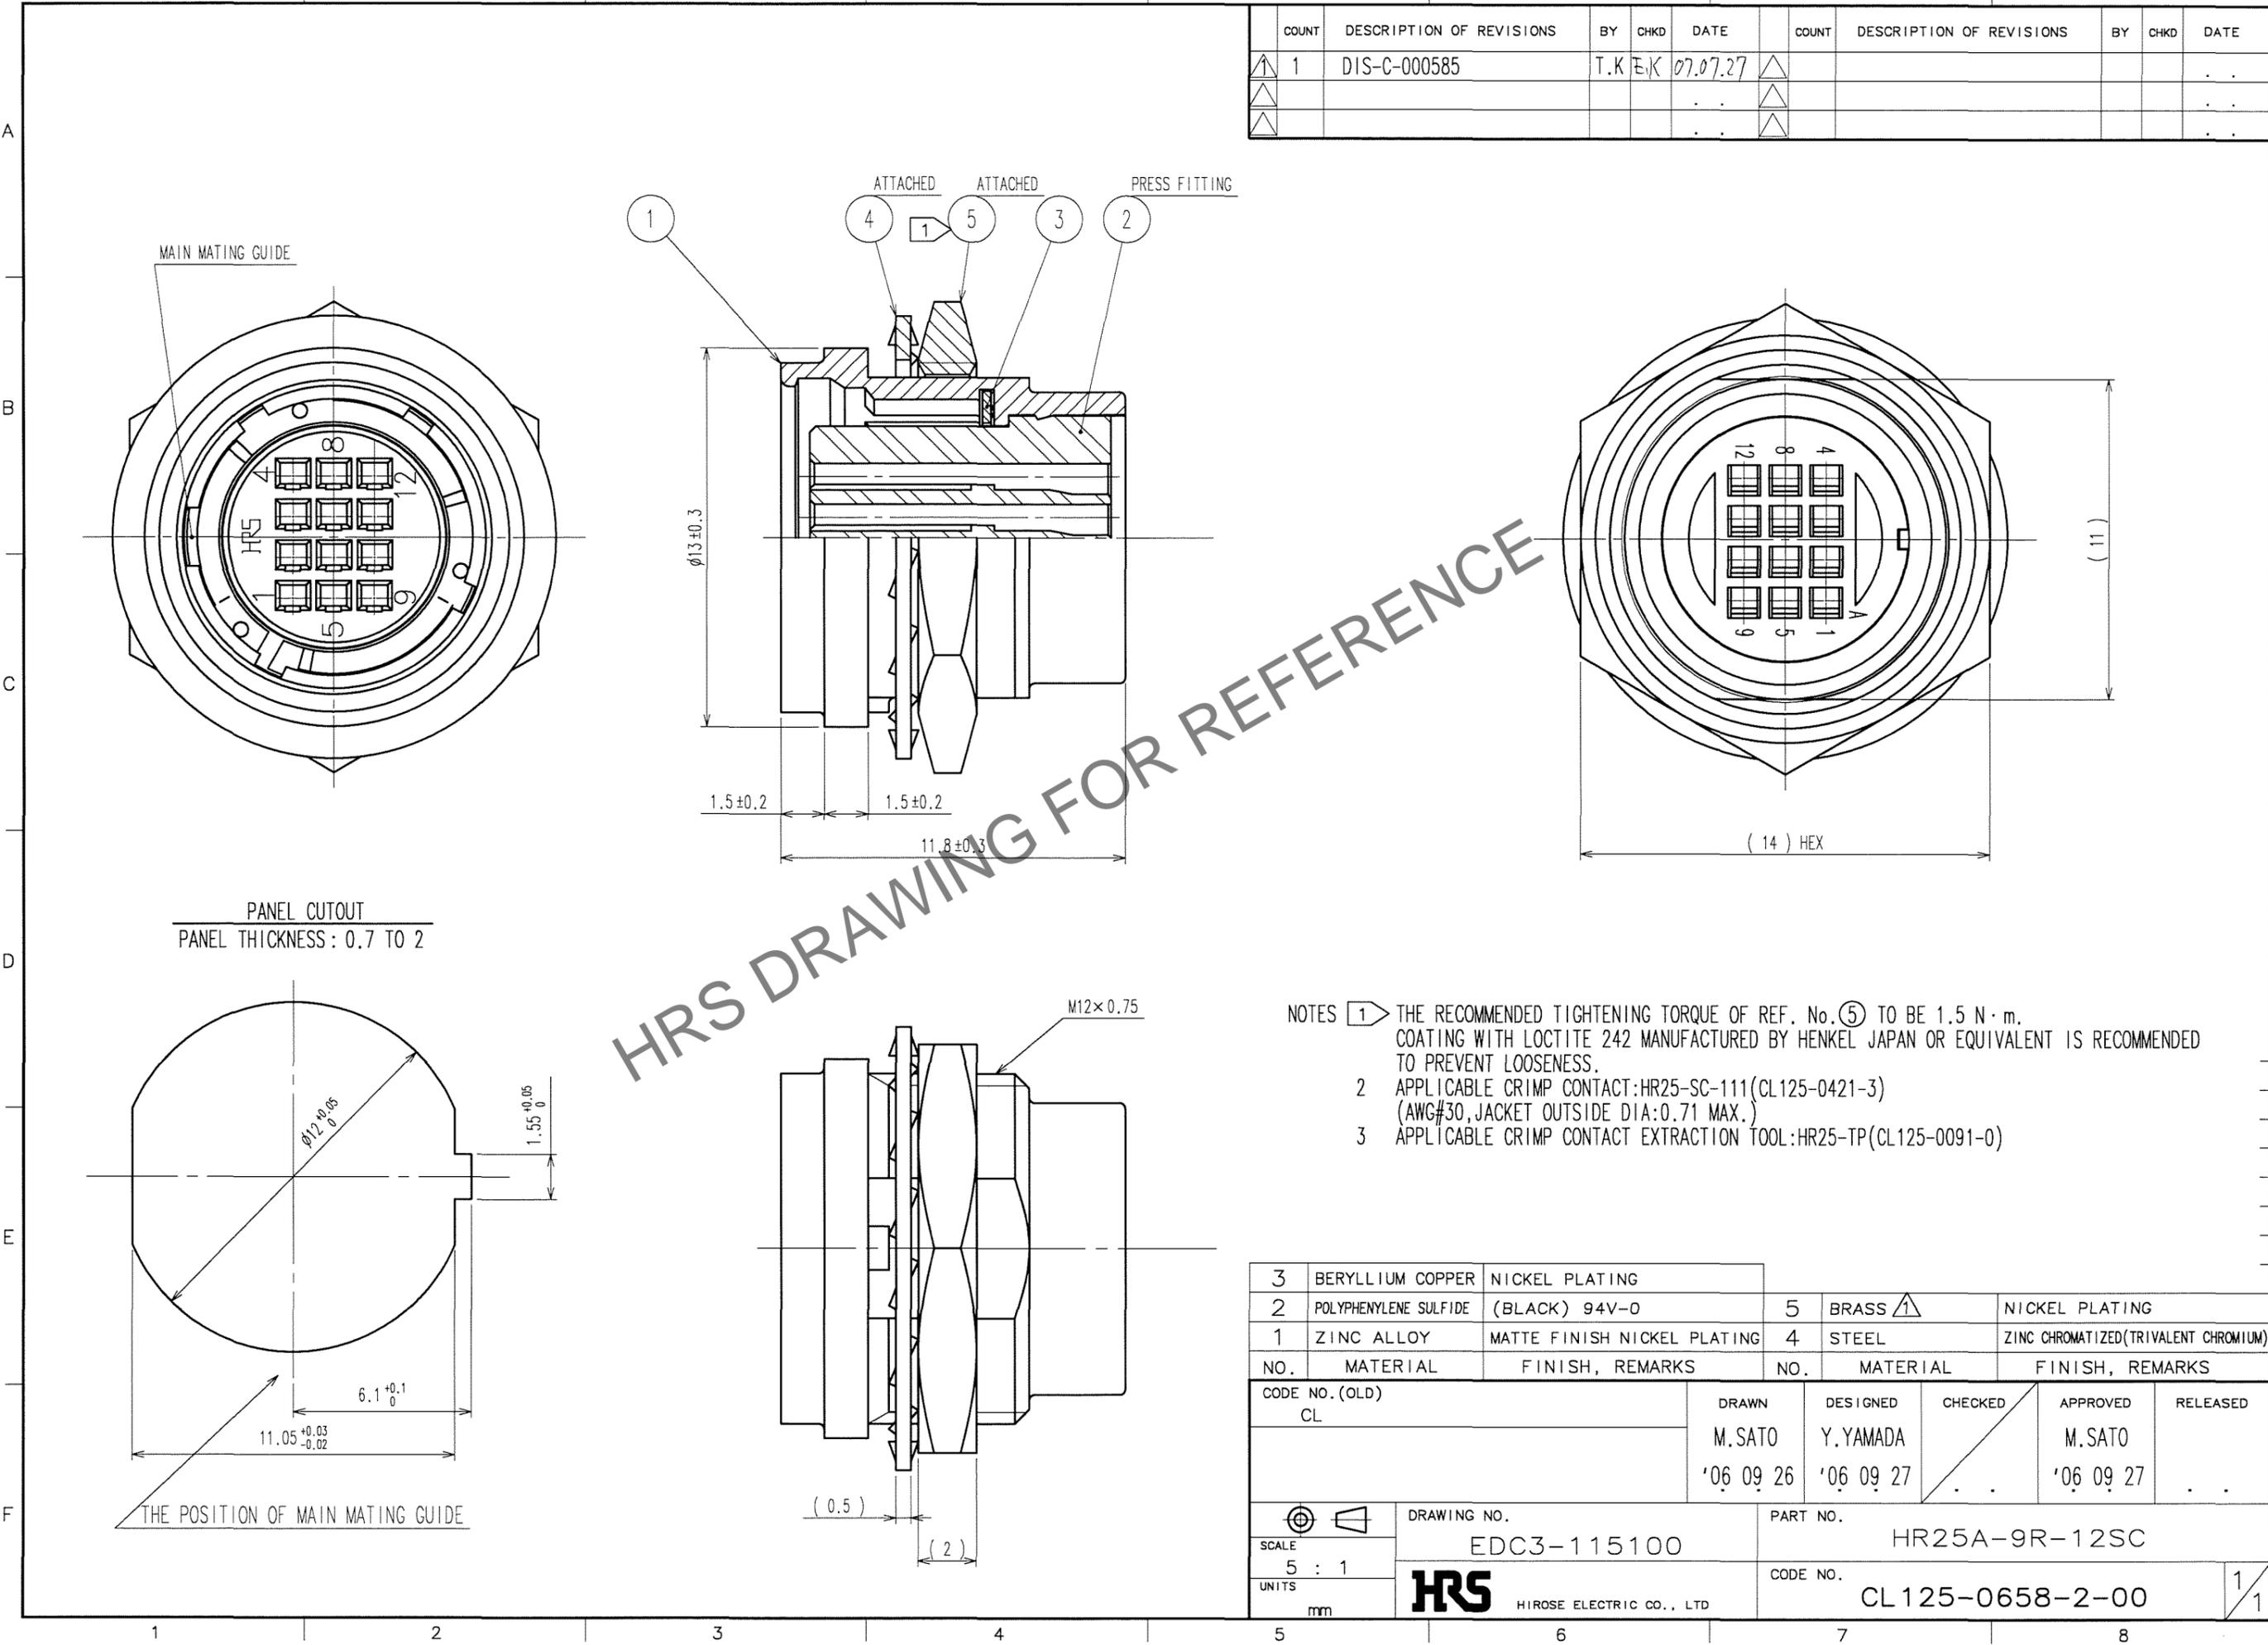

HRS DRAWING FOR REFERENCE

- NOTES
- 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑤ TO BE 1.5 N·m. COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.
  - 2 APPLICABLE CRIMP CONTACT: HR25-SC-111 (CL125-0421-3) (AWG#30, JACKET OUTSIDE DIA: 0.71 MAX.)
  - 3 APPLICABLE CRIMP CONTACT EXTRACTION TOOL: HR25-TP (CL125-0091-0)

3	BERYLLIUM COPPER	NICKEL PLATING			
2	POLYPHENYLENE SULFIDE	(BLACK) 94V-0	5	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	4	STEEL	ZINC CHROMATIZED (TRIVALENT CHROMIUM)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	M. SATO	Y. YAMADA		M. SATO	
	'06 09 26	'06 09 27		'06 09 27	

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-115100	HR25A-9R-12SC
UNITS	HIROSE ELECTRIC CO., LTD	CODE NO.
mm		CL125-0658-2-00

TO
R

1/1