



Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

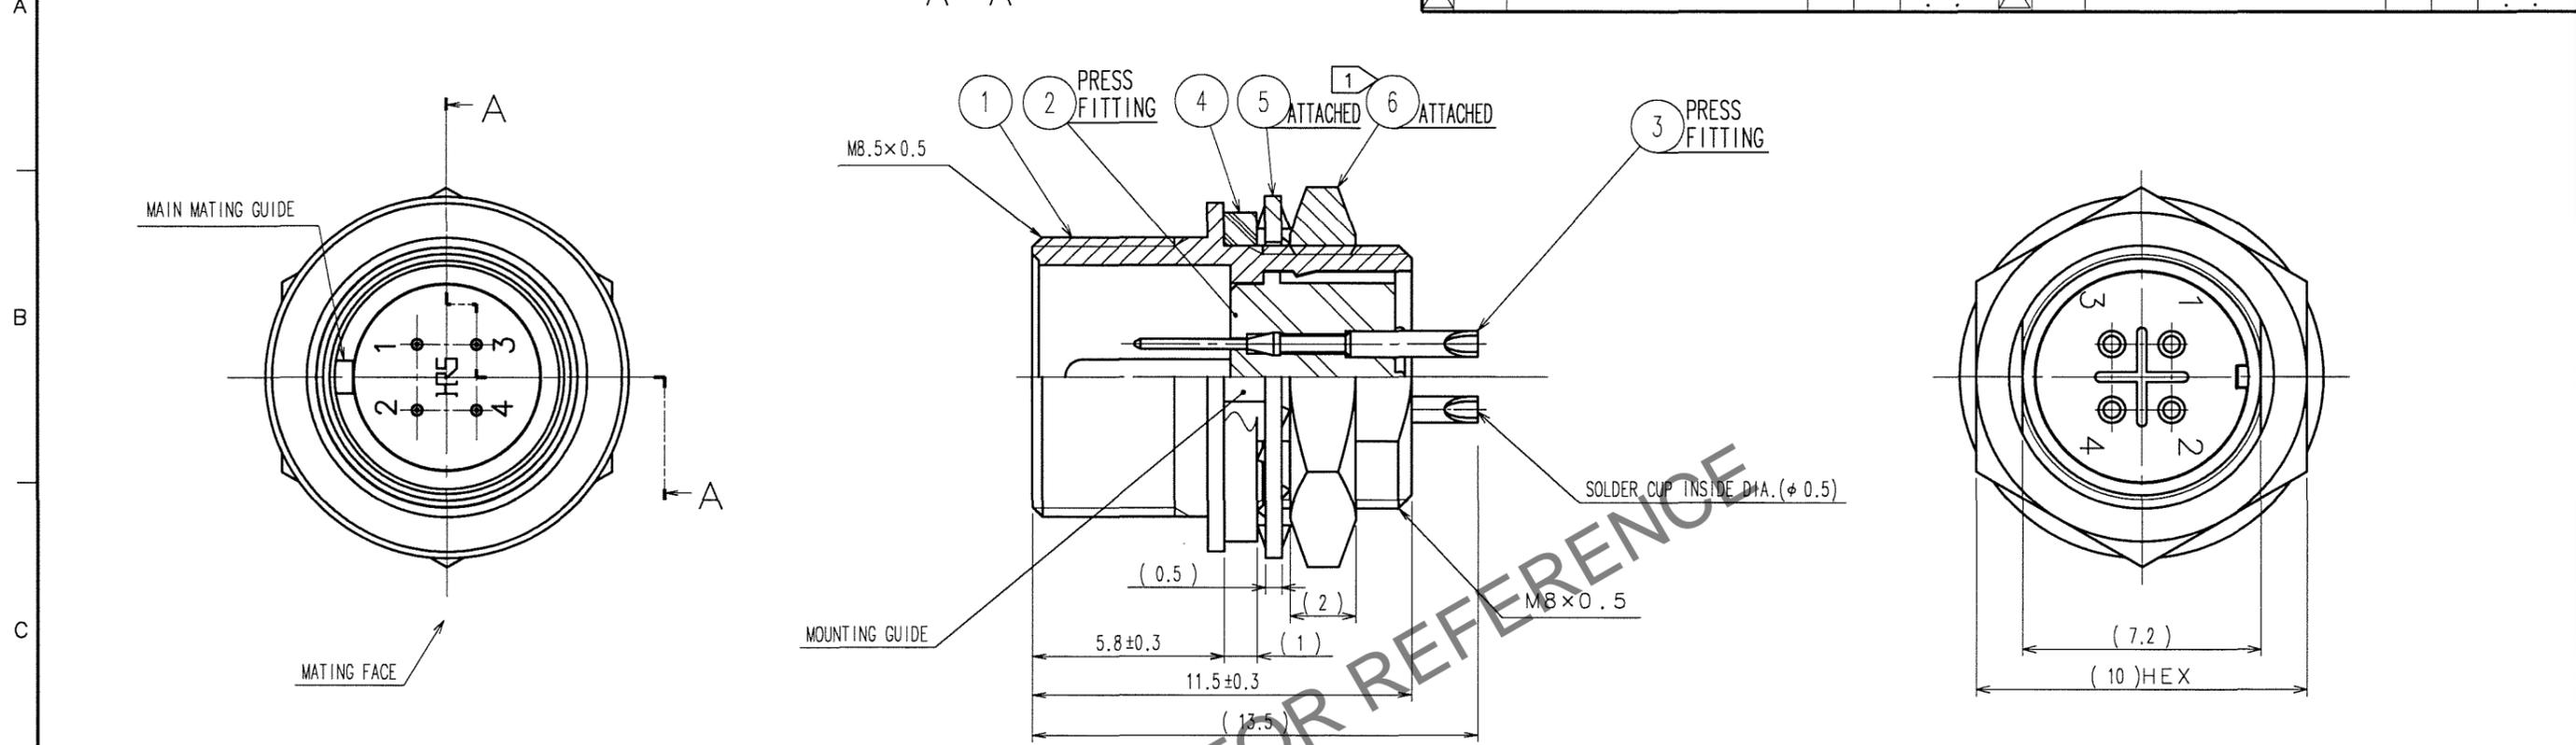

PANEL CUTOUT FROM MATING FACE  
PANEL THICKNESS: 0.7 TO 2

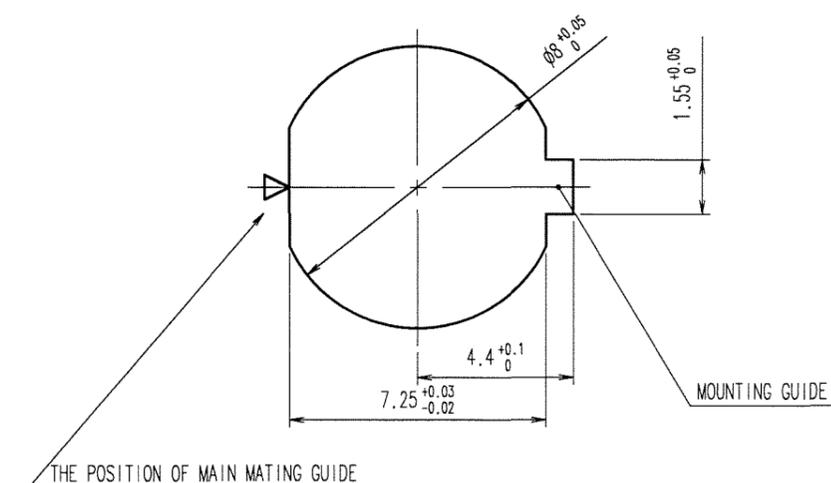

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑥ TO BE 1 N·m.  
COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.  
② OVER PLATING : GOLD 0.2μm min.  
UNDER PLATING : NICKEL 2μm min.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	PHOSPHOR BRONZE	②	6	BRASS	NICKEL PLATING
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	NICKEL PLATING	4	ETHYLENE PROPYLENE RUBBER	(BLACK)

CODE NO. (OLD) CL	DRAWN H. Kawashima 01.10.18	DESIGNED H. Kawashima 01.10.18	CHECKED E. Kunii 06.10.18	APPROVED M. Sato 06.10.19	RELEASED ..
DRAWING NO. EDC3-110175-73		PART NO. HR25-7TR-4P(73)			
SCALE 5 : 1		UNITS mm		CODE NO. CL125-0008-7-73	
HRS HIROSE ELECTRIC CO., LTD		1/1			

TO
R