



Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

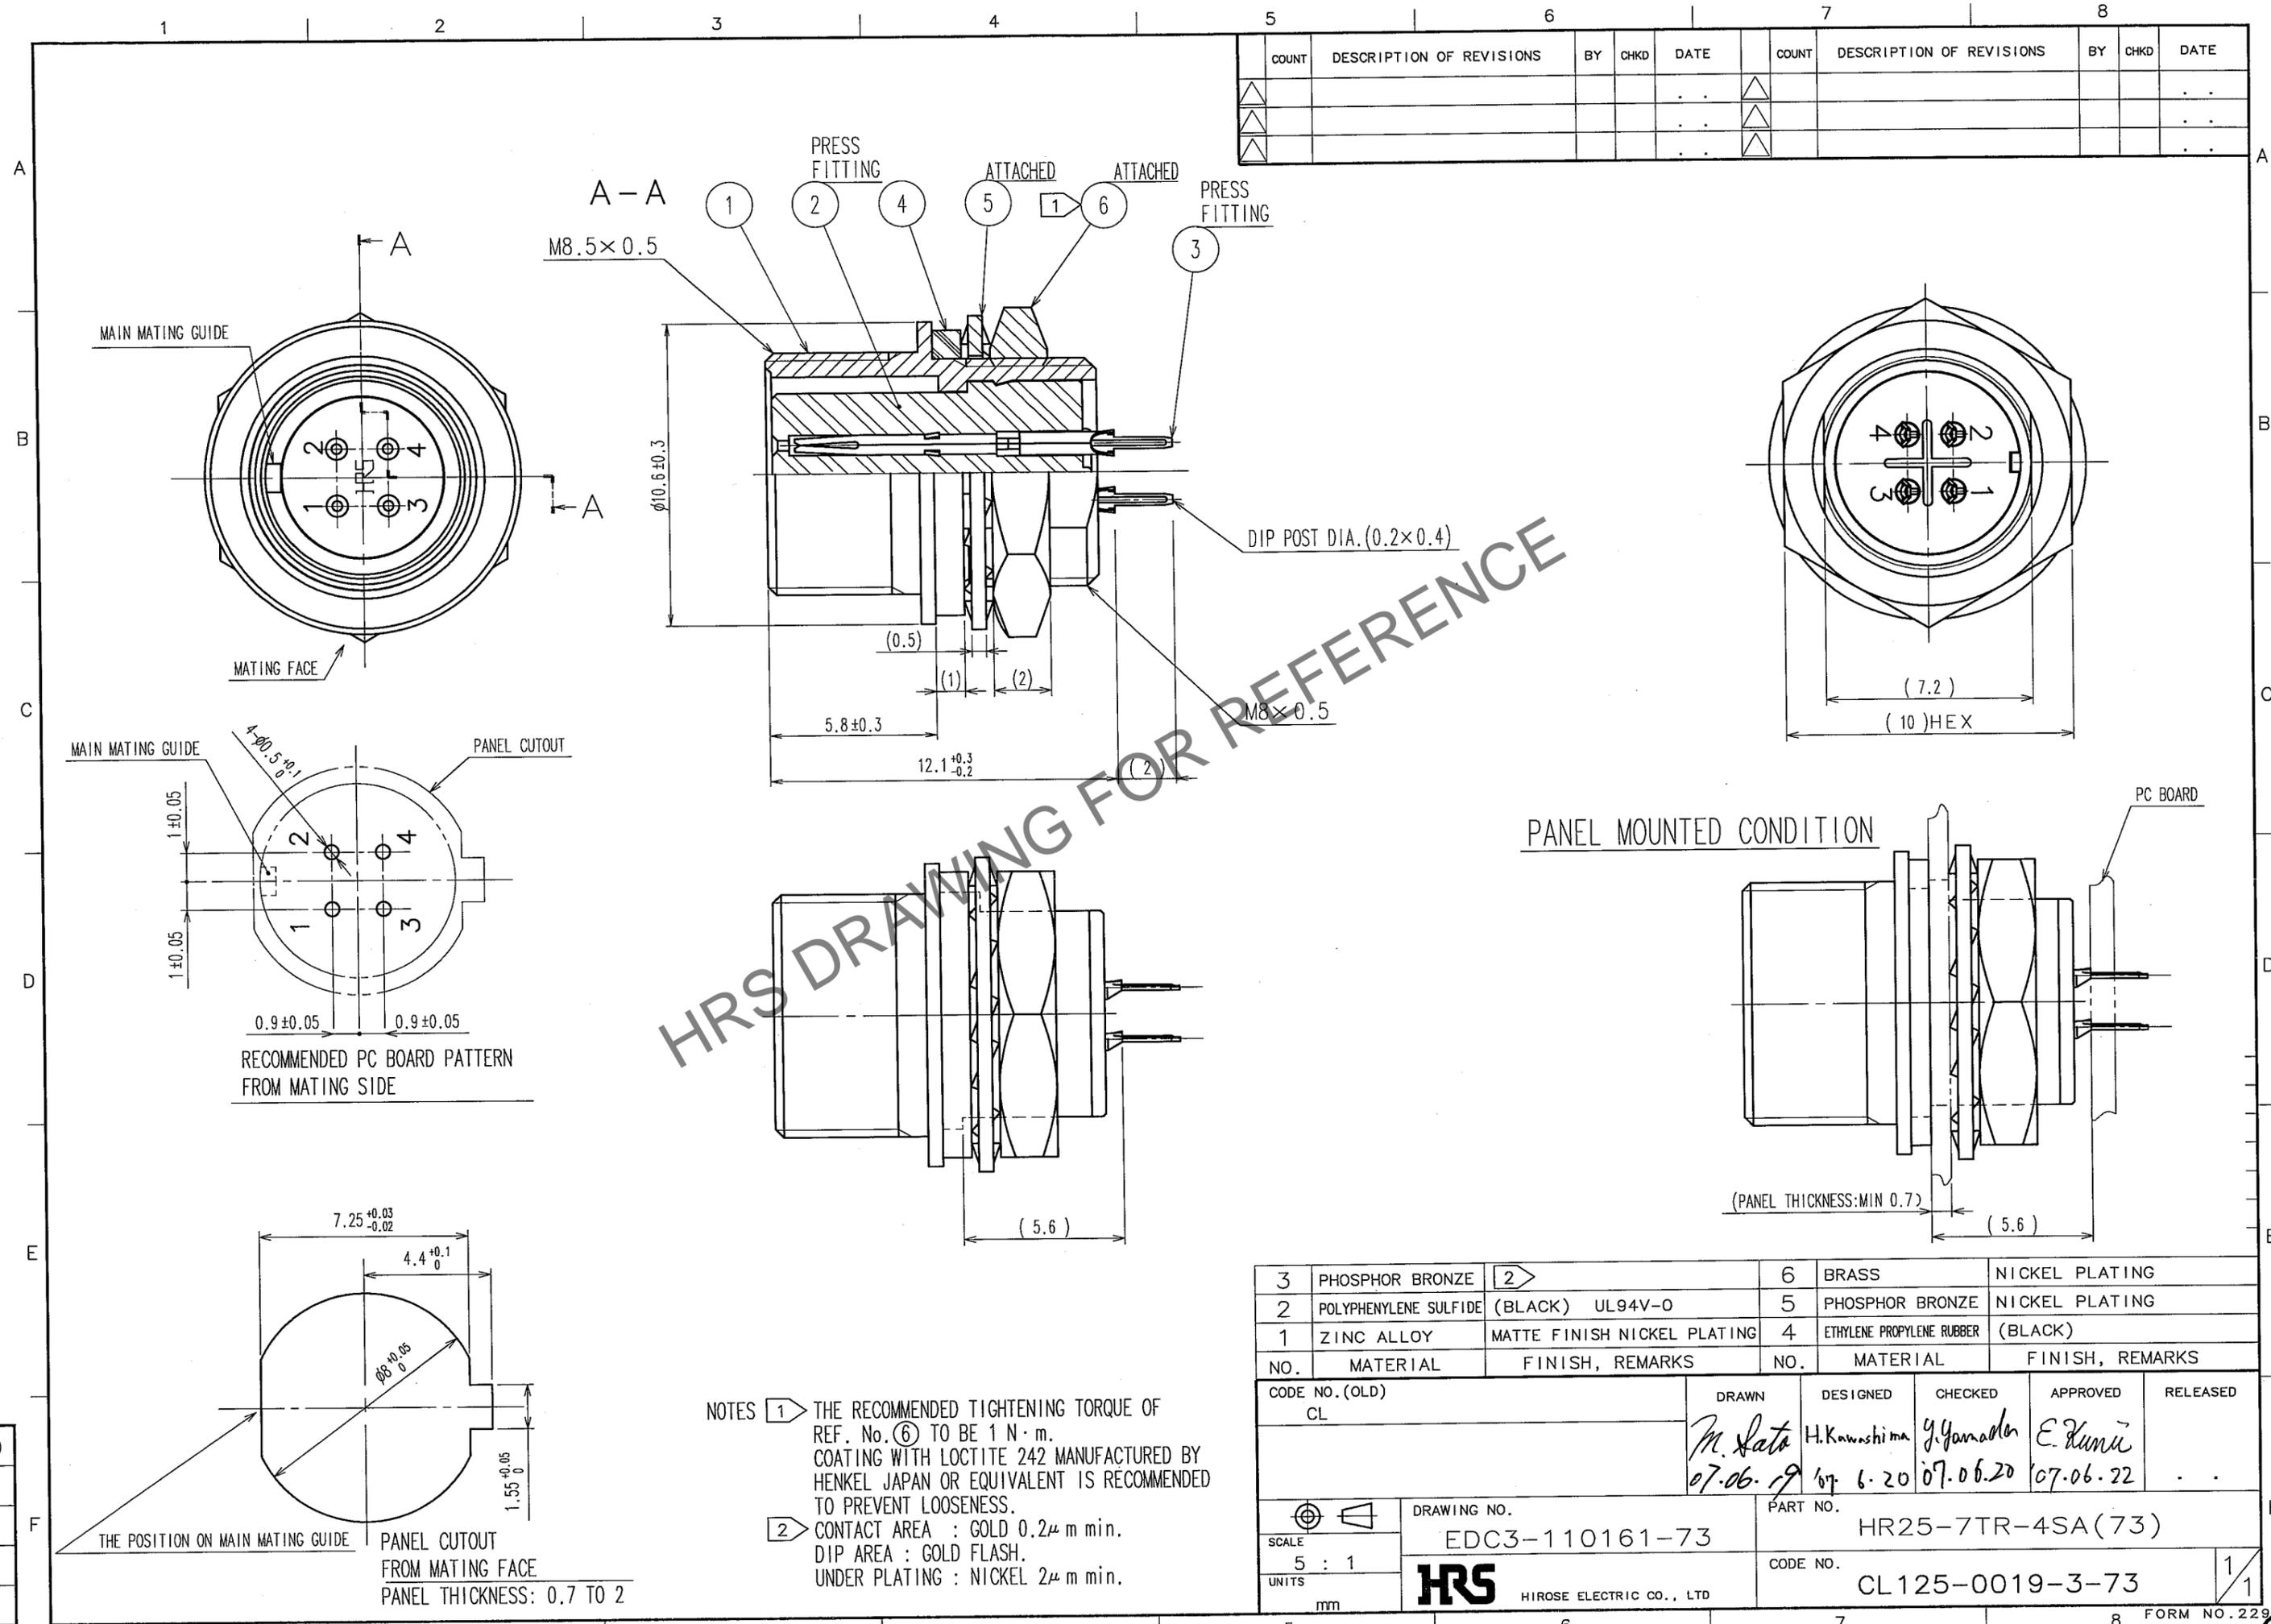

| 5     |                          |    |      | 6    |       |                          |    | 7    |      |       |                          | 8  |      |      |  |
|-------|--------------------------|----|------|------|-------|--------------------------|----|------|------|-------|--------------------------|----|------|------|--|
| COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |  |
|       |                          |    |      |      |       |                          |    |      |      |       |                          |    |      |      |  |
|       |                          |    |      |      |       |                          |    |      |      |       |                          |    |      |      |  |
|       |                          |    |      |      |       |                          |    |      |      |       |                          |    |      |      |  |

HRS DRAWING FOR REFERENCE

PANEL MOUNTED CONDITION

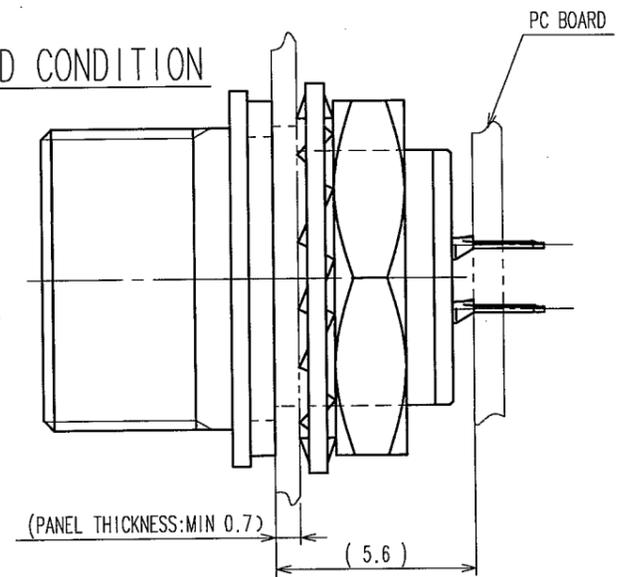

| NO. | MATERIAL              | FINISH, REMARKS             | NO. | MATERIAL                  | FINISH, REMARKS |
|-----|-----------------------|-----------------------------|-----|---------------------------|-----------------|
| 3   | PHOSPHOR BRONZE       | ②                           | 6   | BRASS                     | NICKEL PLATING  |
| 2   | POLYPHENYLENE SULFIDE | (BLACK) UL94V-0             | 5   | PHOSPHOR BRONZE           | NICKEL PLATING  |
| 1   | ZINC ALLOY            | MATTE FINISH NICKEL PLATING | 4   | ETHYLENE PROPYLENE RUBBER | (BLACK)         |

|                               |                                     |                                     |   |   |          |
|-------------------------------|-------------------------------------|-------------------------------------|---|---|----------|
| CODE NO. (OLD)<br>CL          | DRAWN<br><i>M. Sato</i><br>07.06.19 | DESIGNED<br>H. Kawashima<br>by 6.20 | CHECKED<br><i>Y. Yamada</i><br>07.06.20 | APPROVED<br><i>E. Kunii</i><br>07.06.22 | RELEASED |
| DRAWING NO.<br>EDC3-110161-73 |                                     | PART NO.<br>HR25-7TR-4SA(73)        |   |   |          |
| UNITS<br>mm                   |                                     | CODE NO.<br>CL125-0019-3-73         |   |   | 1/1      |

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑥ TO BE 1 N·m. COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.

② CONTACT AREA : GOLD 0.2μm min. DIP AREA : GOLD FLASH. UNDER PLATING : NICKEL 2μm min.

|    |
|----|
| TO |
| R  |
|    |
|    |