


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

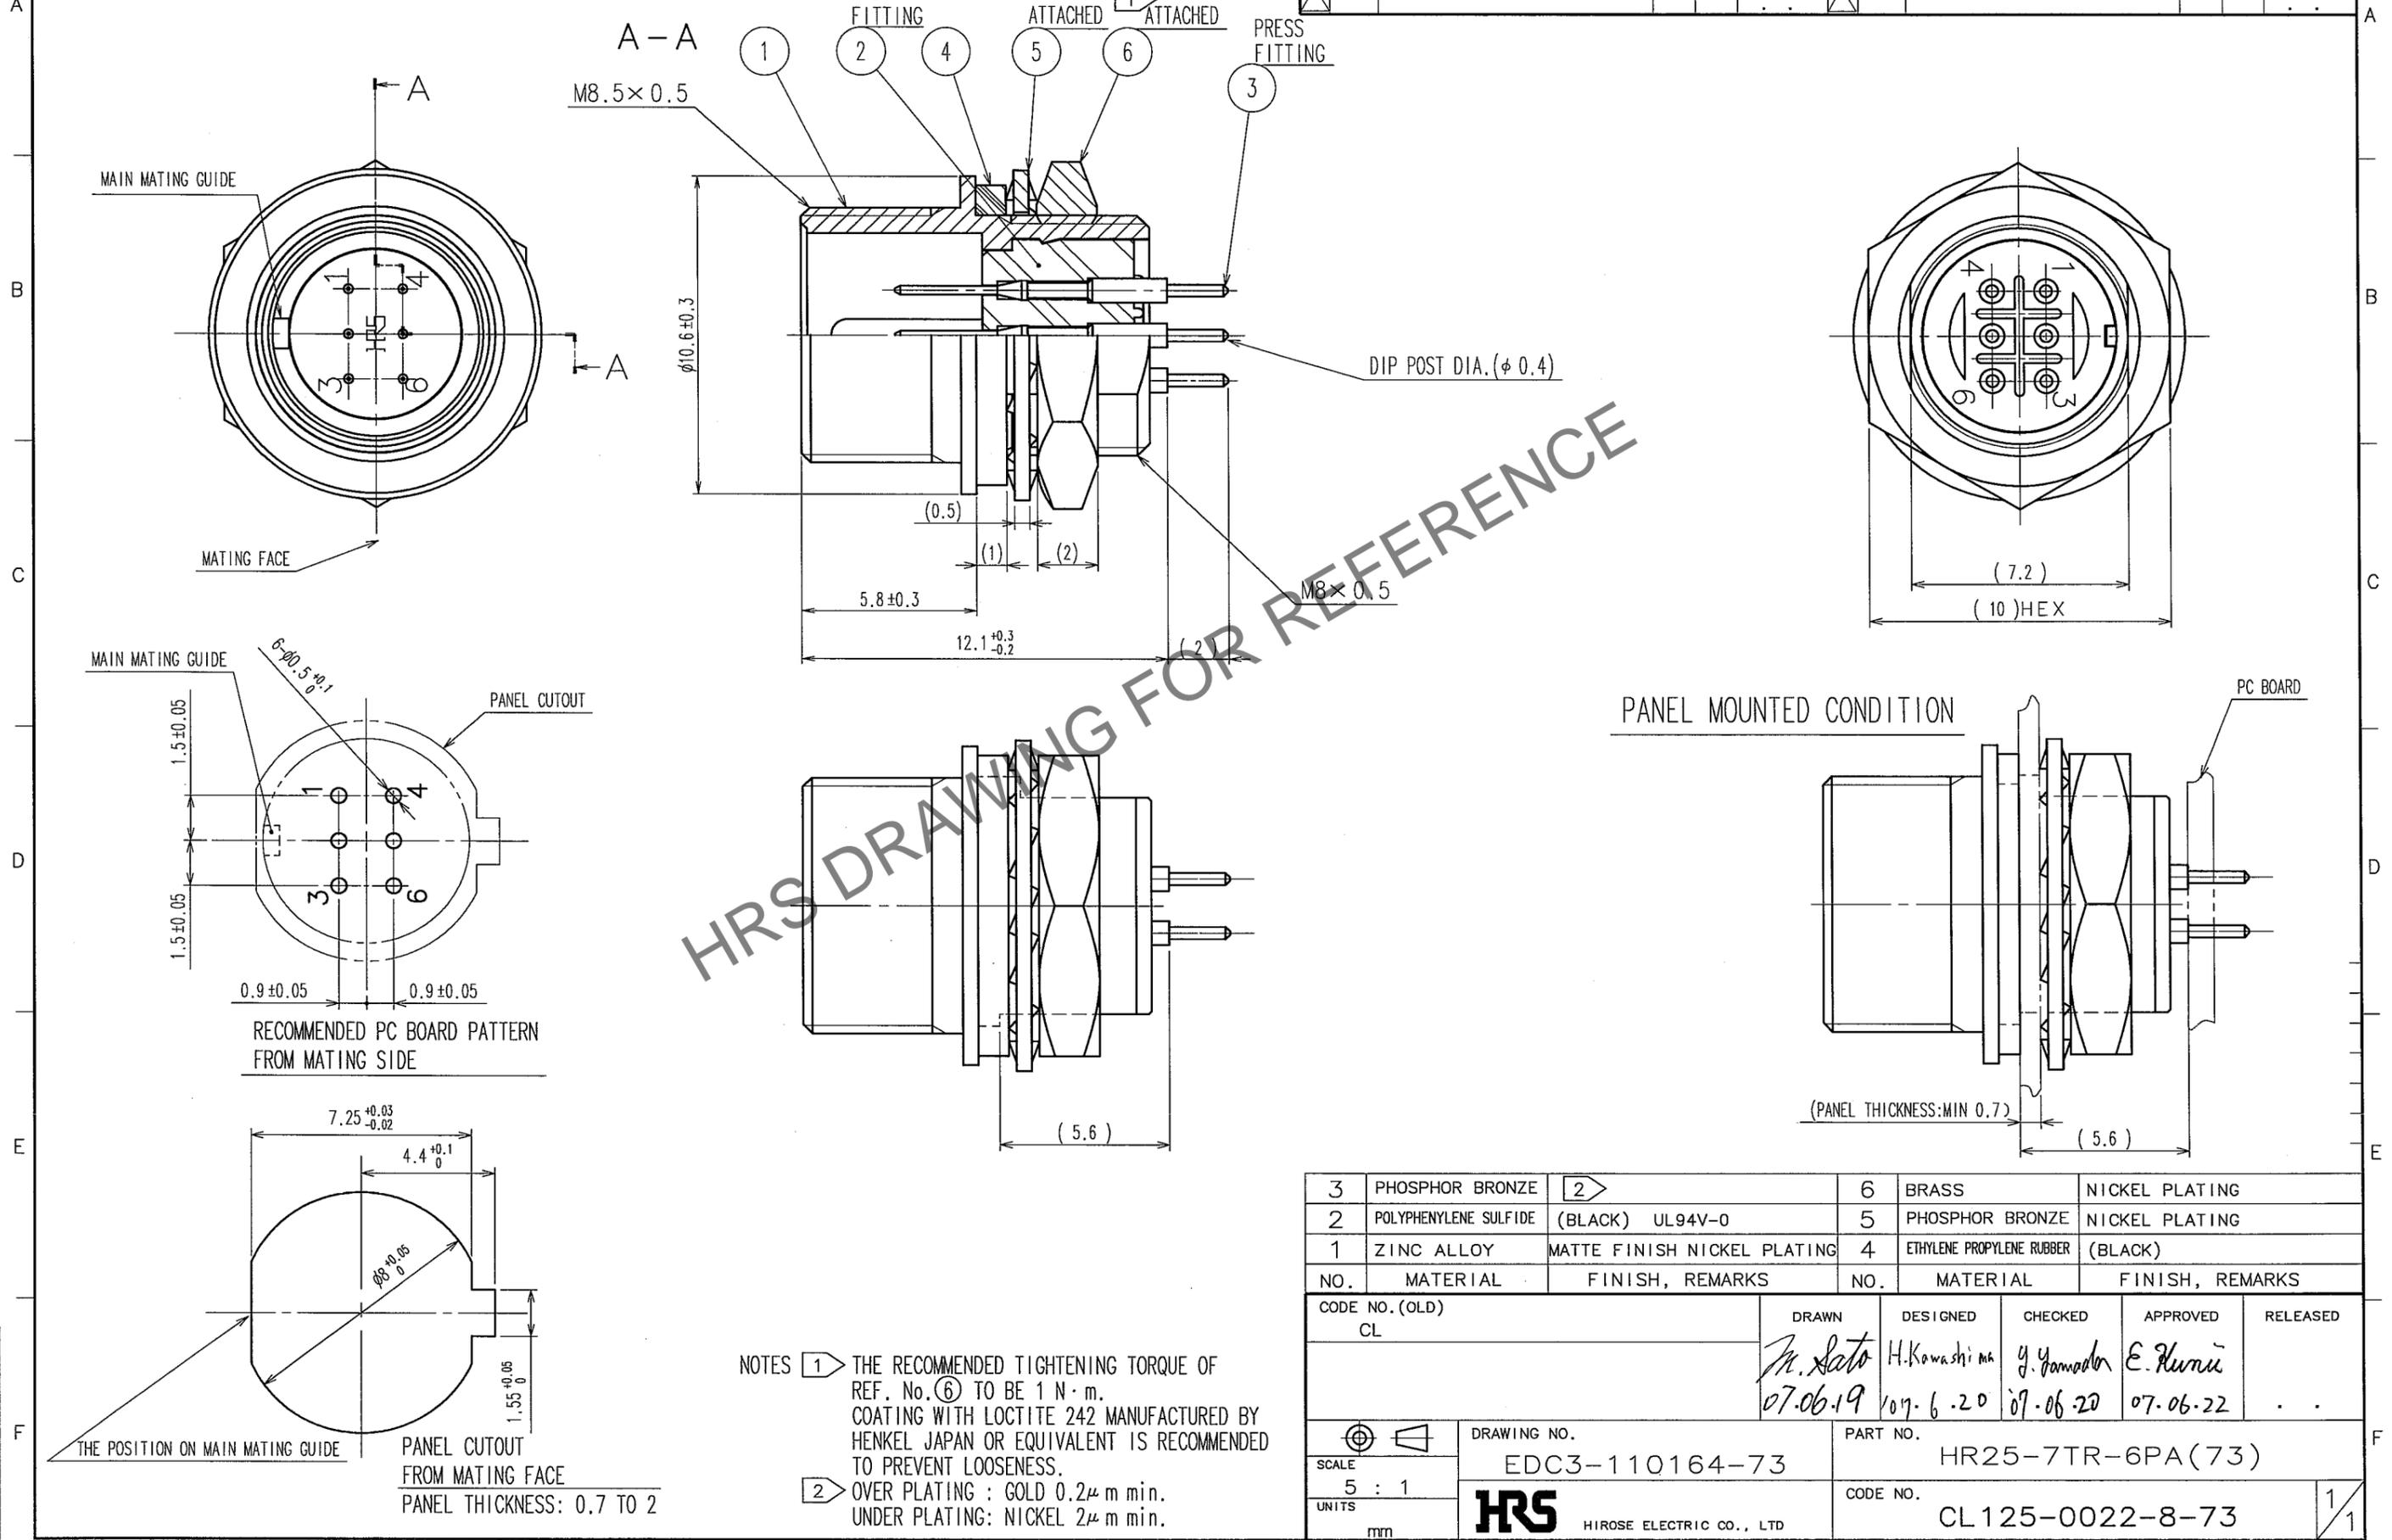

HRS DRAWING FOR REFERENCE

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑥ TO BE 1 N·m. COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.
② OVER PLATING : GOLD 0.2μ m min. UNDER PLATING: NICKEL 2μ m min.

3	PHOSPHOR BRONZE	②	6	BRASS	NICKEL PLATING
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	4	ETHYLENE PROPYLENE RUBBER	(BLACK)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN <i>M. Sato</i> 07.06.19	DESIGNED H. Kawashima 10.7.6.20	CHECKED y. Yamadori 07.06.20	APPROVED E. Kunii 07.06.22	RELEASED .
SCALE 5 : 1	DRAWING NO. EDC3-110164-73	PART NO. HR25-7TR-6PA(73)		CODE NO. CL125-0022-8-73	1/1
UNITS mm	HRS HIROSE ELECTRIC CO., LTD				

IN CASE OF CONSIDERATION FOR USING AUTOMOTIVE EQUIPMENT / DEVICE WHICH DEMANDS HIGH RELIABILITY, KINDLY CONTACT OUR SALES WINDOW CORRESPONDENTS.