


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

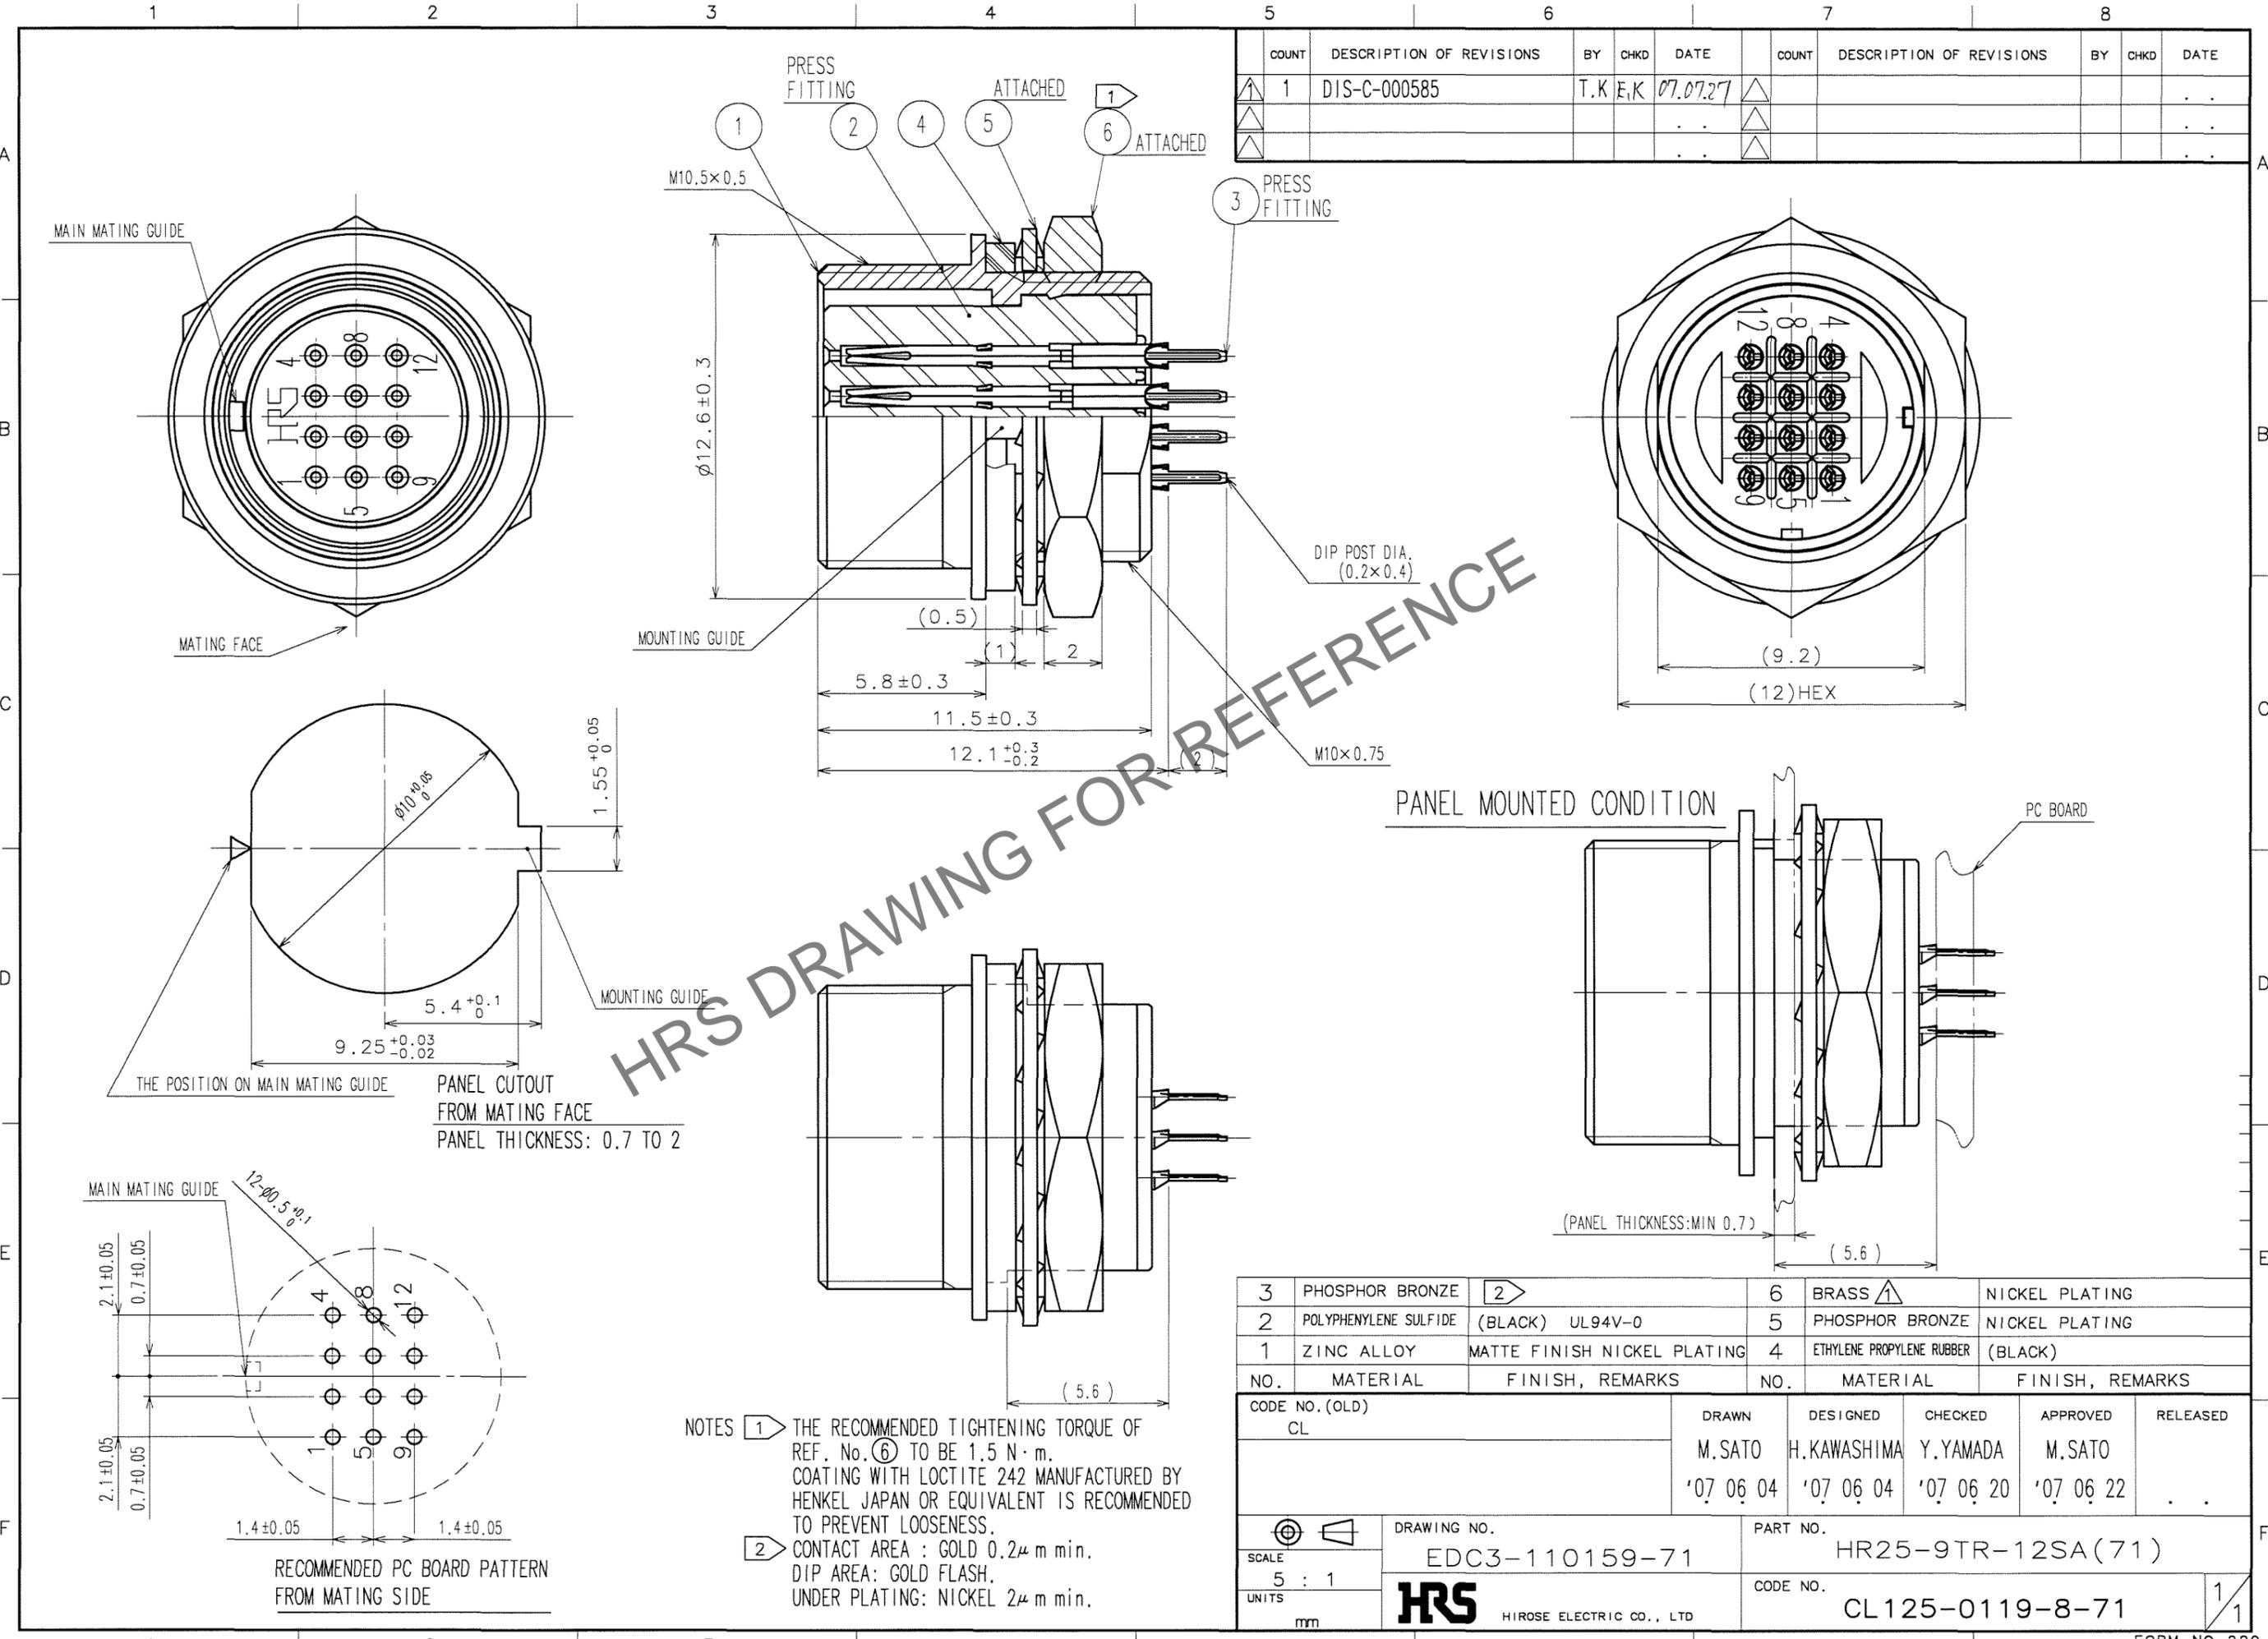

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E,K	07.07.27					

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	PHOSPHOR BRONZE	2	6	BRASS	NICKEL PLATING
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	4	ETHYLENE PROPYLENE RUBBER	(BLACK)

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	M.SATO	H.KAWASHIMA	Y.YAMADA	M.SATO	
	'07 06 04	'07 06 04	'07 06 20	'07 06 22	

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-110159-71	HR25-9TR-12SA(71)
UNITS	CODE NO.	
mm	CL125-0119-8-71	1/1

NOTES 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. No. 6 TO BE 1.5 N·m. COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.  
2 CONTACT AREA : GOLD 0.2μ m min. DIP AREA: GOLD FLASH. UNDER PLATING: NICKEL 2μ m min.

TO
R