


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

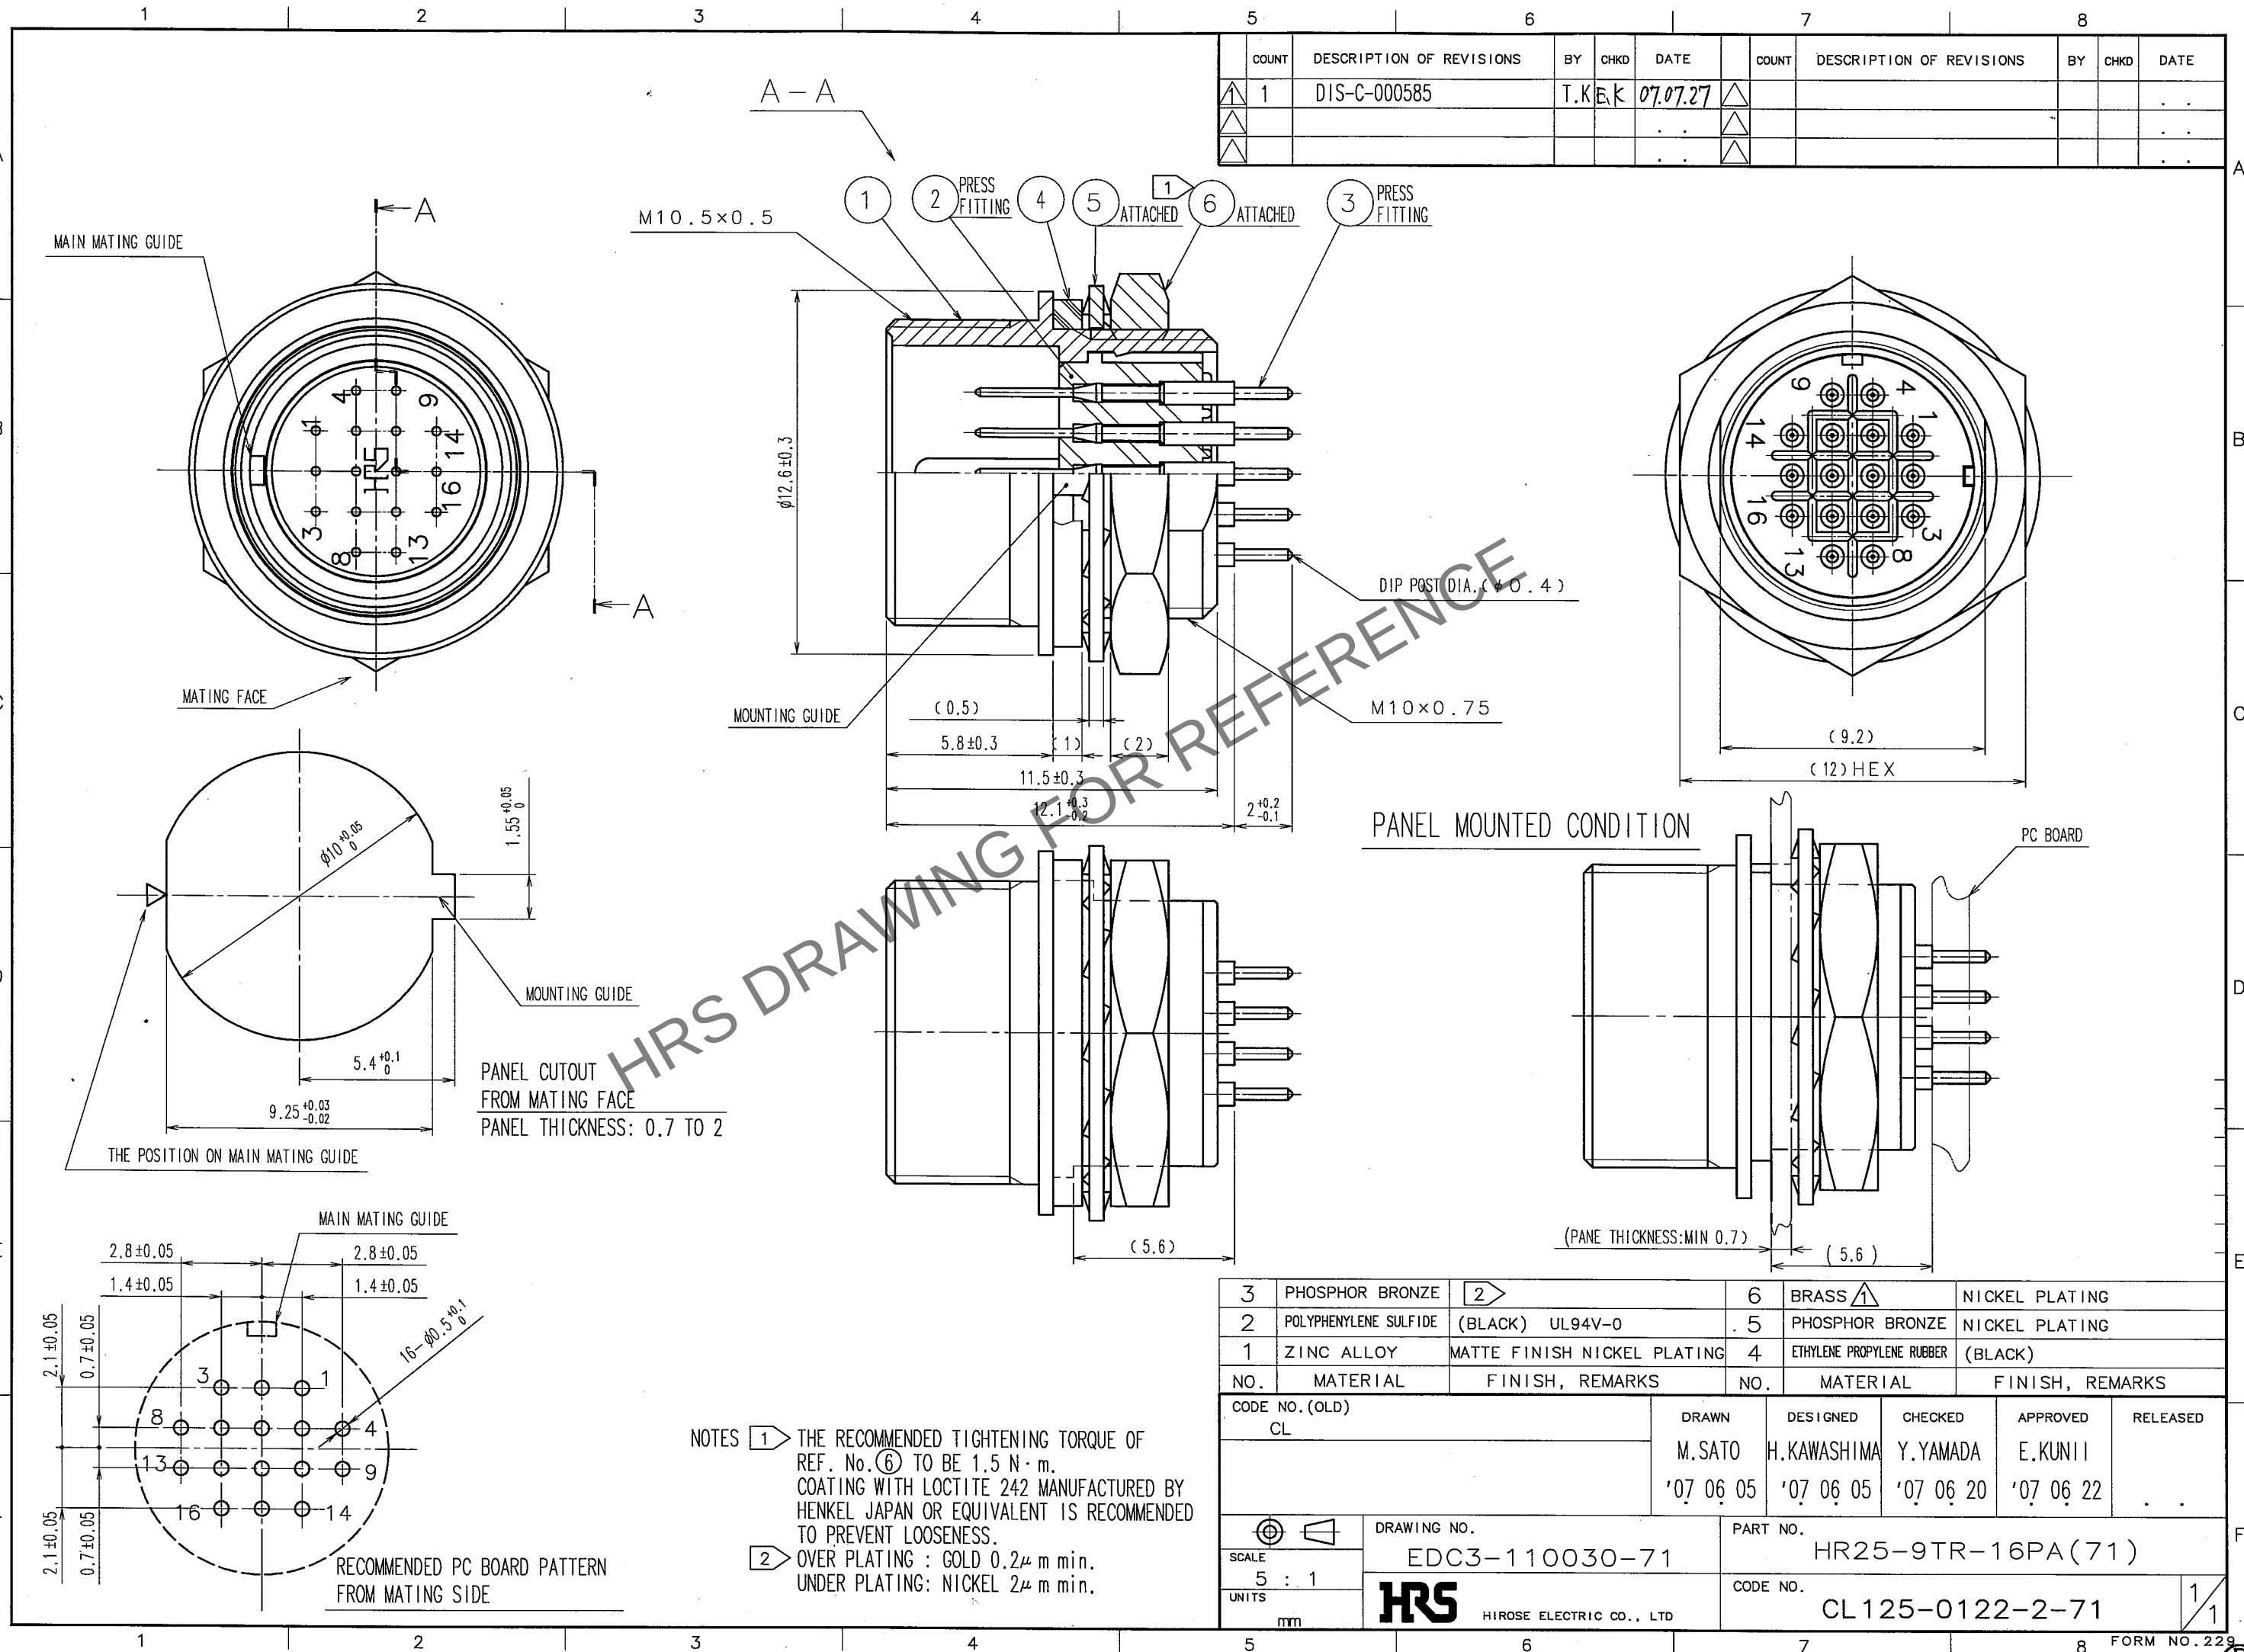

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑥ TO BE 1.5 N·m. COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.
② OVER PLATING : GOLD $0.2 \mu\text{m}$ min. UNDER PLATING: NICKEL $2 \mu\text{m}$ min.

3	PHOSPHOR BRONZE	2	6	BRASS	NICKEL PLATING	
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	4	ETHYLENE PROPYLENE RUBBER	(BLACK)	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL						
		M.SATO	H.KAWASHIMA	Y.YAMADA	E.KUNII	
		'07 06 05	'07 06 05	'07 06 20	'07 06 22	.
		DRAWING NO.		PART NO.		
SCALE		EDC3-110030-71		HR25-9TR-16PA(71)		
5 : 1				CODE NO.		
UNITS				CL125-0122-2-71		
mm		HIROSE ELECTRIC CO., LTD		1/1		