


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

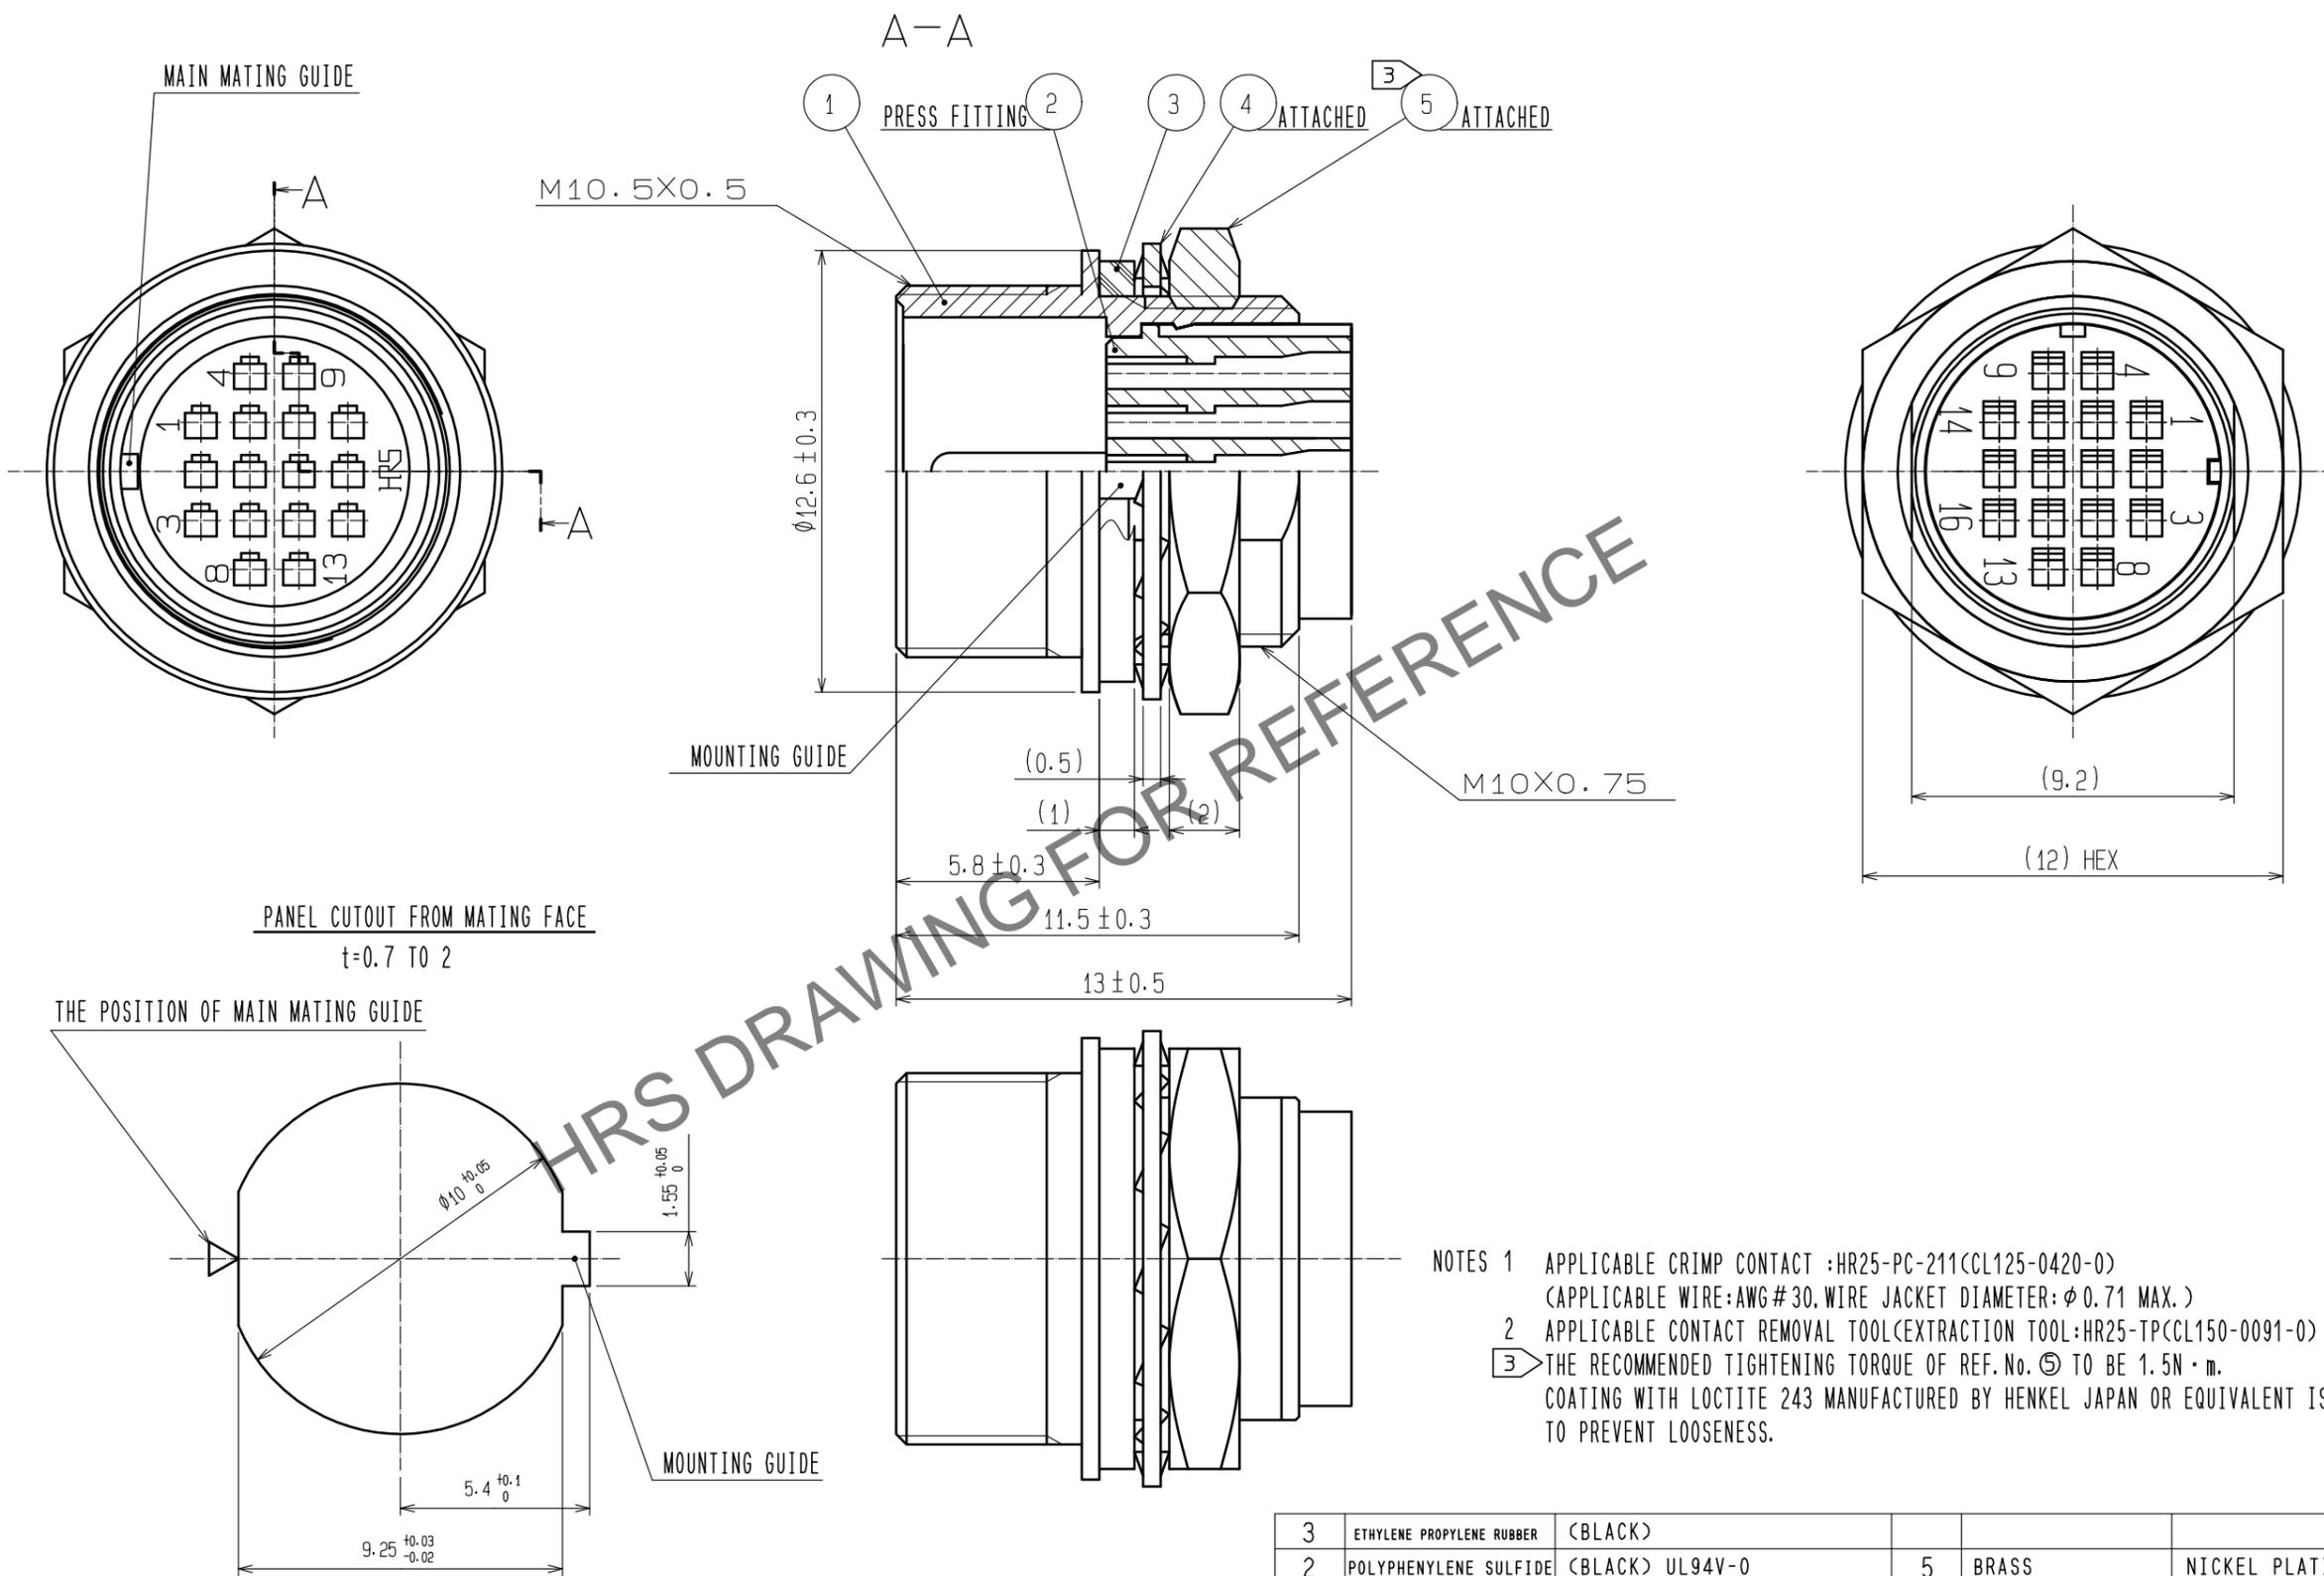

HRS DRAWING FOR REFERENCE

- NOTES 1 APPLICABLE CRIMP CONTACT :HR25-PC-211(CCL125-0420-0)  
 (APPLICABLE WIRE:AWG#30,WIRE JACKET DIAMETER:φ0.71 MAX.)  
 2 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL:HR25-TPCCL150-0091-0)  
 3 THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑤ TO BE 1.5N·m.  
 COATING WITH LOCTITE 243 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.

3	ETHYLENE PROPYLENE RUBBER	(BLACK)			
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE	5 : 1	COUNT	DESCRIPTION OF REVISIONS
		DESIGNED	EJ. KUNII		15.10.14
		CHECKED	EJ. KUNII		15.10.14
		DESIGNED	MM. ISHII		15.10.14
		DRAWN	MM. ISHII		15.10.14
DRAWING NO.			EDC-110242-71-00		
PART NO.			HR25-9TR-16PC(71)		
CODE NO.			CL125-0410-7-71		