


Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					

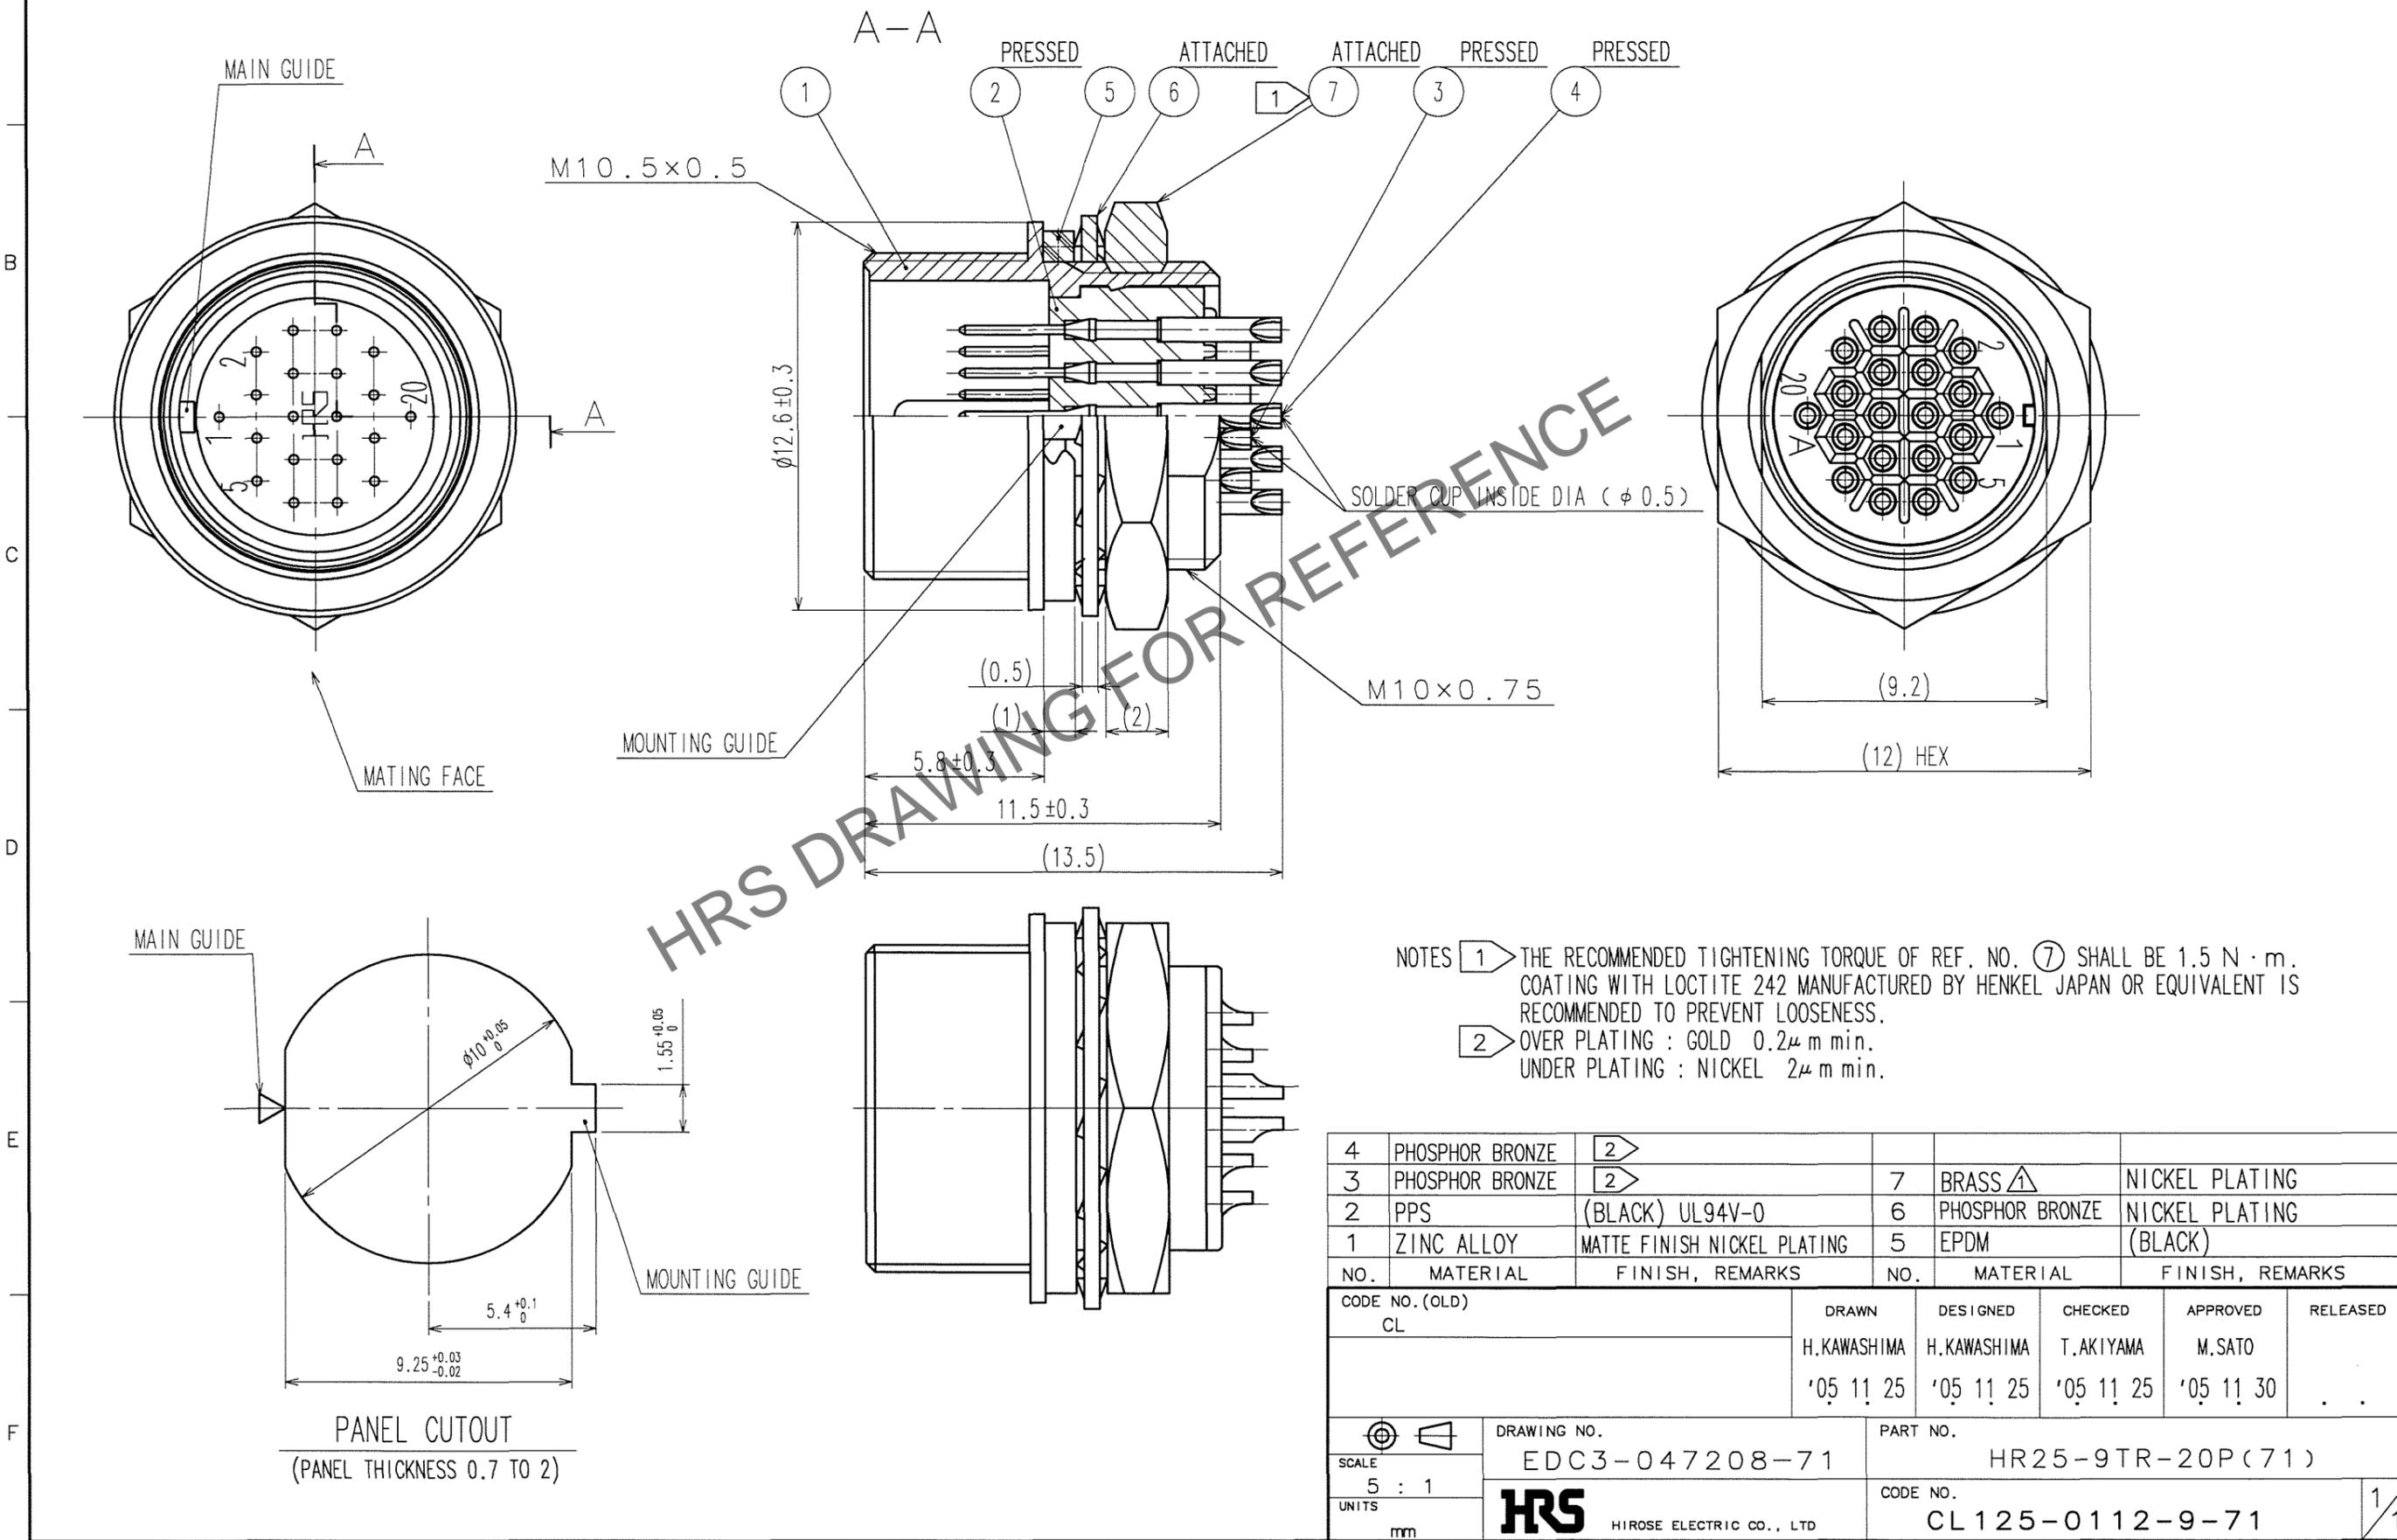

HRS DRAWING FOR REFERENCE

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑦ SHALL BE 1.5 N · m. COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.
② OVER PLATING : GOLD 0.2 μ m min.
UNDER PLATING : NICKEL 2 μ m min.

4	PHOSPHOR BRONZE	②			
3	PHOSPHOR BRONZE	②	7	BRASS ▲ NICKEL PLATING	
2	PPS	(BLACK) UL94V-0	6	PHOSPHOR BRONZE NICKEL PLATING	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	5	EPDM (BLACK)	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	H.KAWASHIMA	H.KAWASHIMA	T.AKIYAMA	M.SATO	
	'05 11 25	'05 11 25	'05 11 25	'05 11 30	

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-047208-71	HR25-9TR-20P(71)
UNITS	mm	CODE NO.
	HRS HIROSE ELECTRIC CO., LTD	CL125-0112-9-71

TO
R