
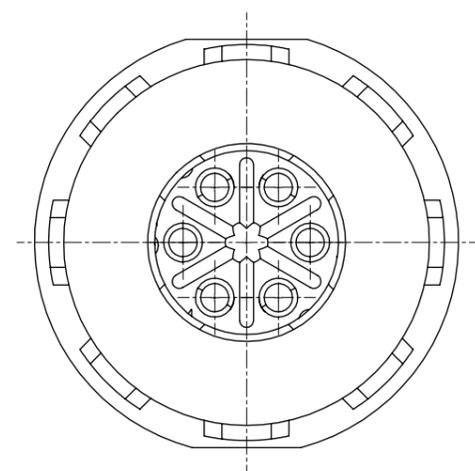
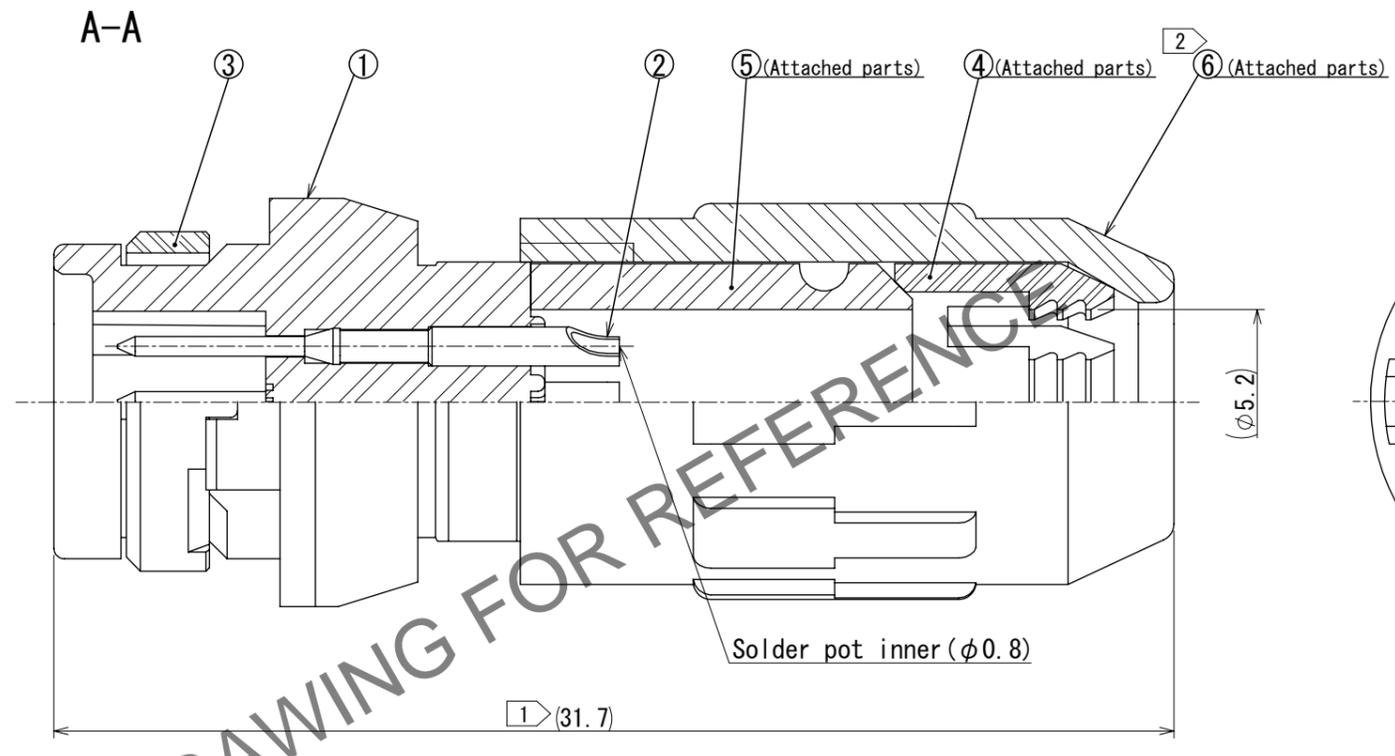


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

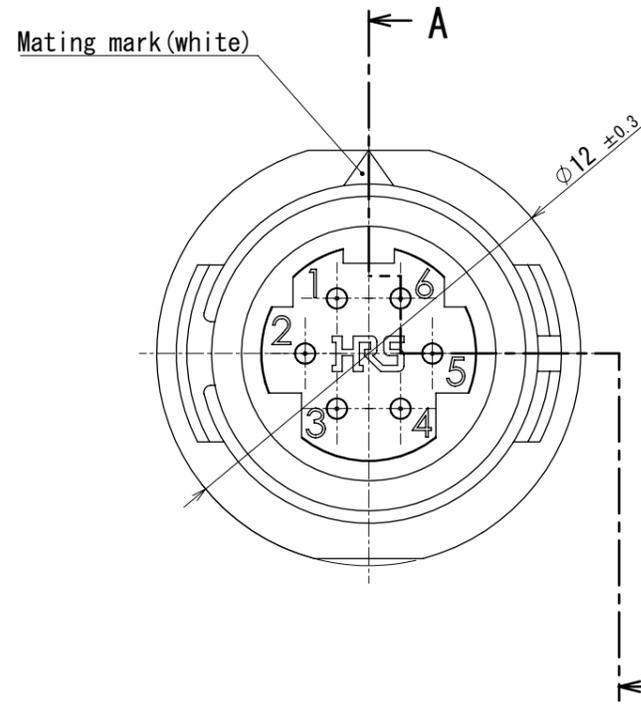

HRS DRAWING FOR REFERENCE

- Notes
- ① Total length becomes  $28.8 \pm 1$  when Ref.No.⑥ is screwed into Ref.No.① completely.
  - ② The recommended clump torque of Ref.No.⑥ to be  $0.45 \sim 0.5 \text{ N} \cdot \text{m}$ .  
 To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00).  
 Spacer for assembly is available HR30-6P-T02.
  - ③ Table for assembly and soldering is available HR30-6R-6P-T01.
  - ④ Surface plating : gold plating  $0.2 \mu\text{m}$  min.  
 Under plating : nickel plating  $2 \mu\text{m}$  min.
  - ⑤ The cable pull and twisting strength and other characteristics may differ, depending on the cable structure.  
 Please confirm before the use.
  - ⑥ The assembly this product applies to the manual ETAD-C0476-00.

△ CAD change

3	PPS	(Black) UL94V-0	6	PBT	(Black) UL94V-0			
2	Brass	④	5	CR	(Black)			
1	PPS	(Black) UL94V-0	4	Polyacetal	(Natural:Milky white) △			
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		5:1	△ 2	DIS-C-00014690		HY. KISHI	HY. KOBAYASHI	2023.08.29
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	2018.02.26	DRAWING NO. EDC-112103-31-00				
		CHECKED : HY. KOBAYASHI	2018.02.26	PART NO. HR30-6J-6P (31)				
		DESIGNED : DS. MATSUNE	2018.02.26	CODE NO. CL0130-2009-6-31				
		DRAWN : DS. MATSUNE	2018.02.26					