


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

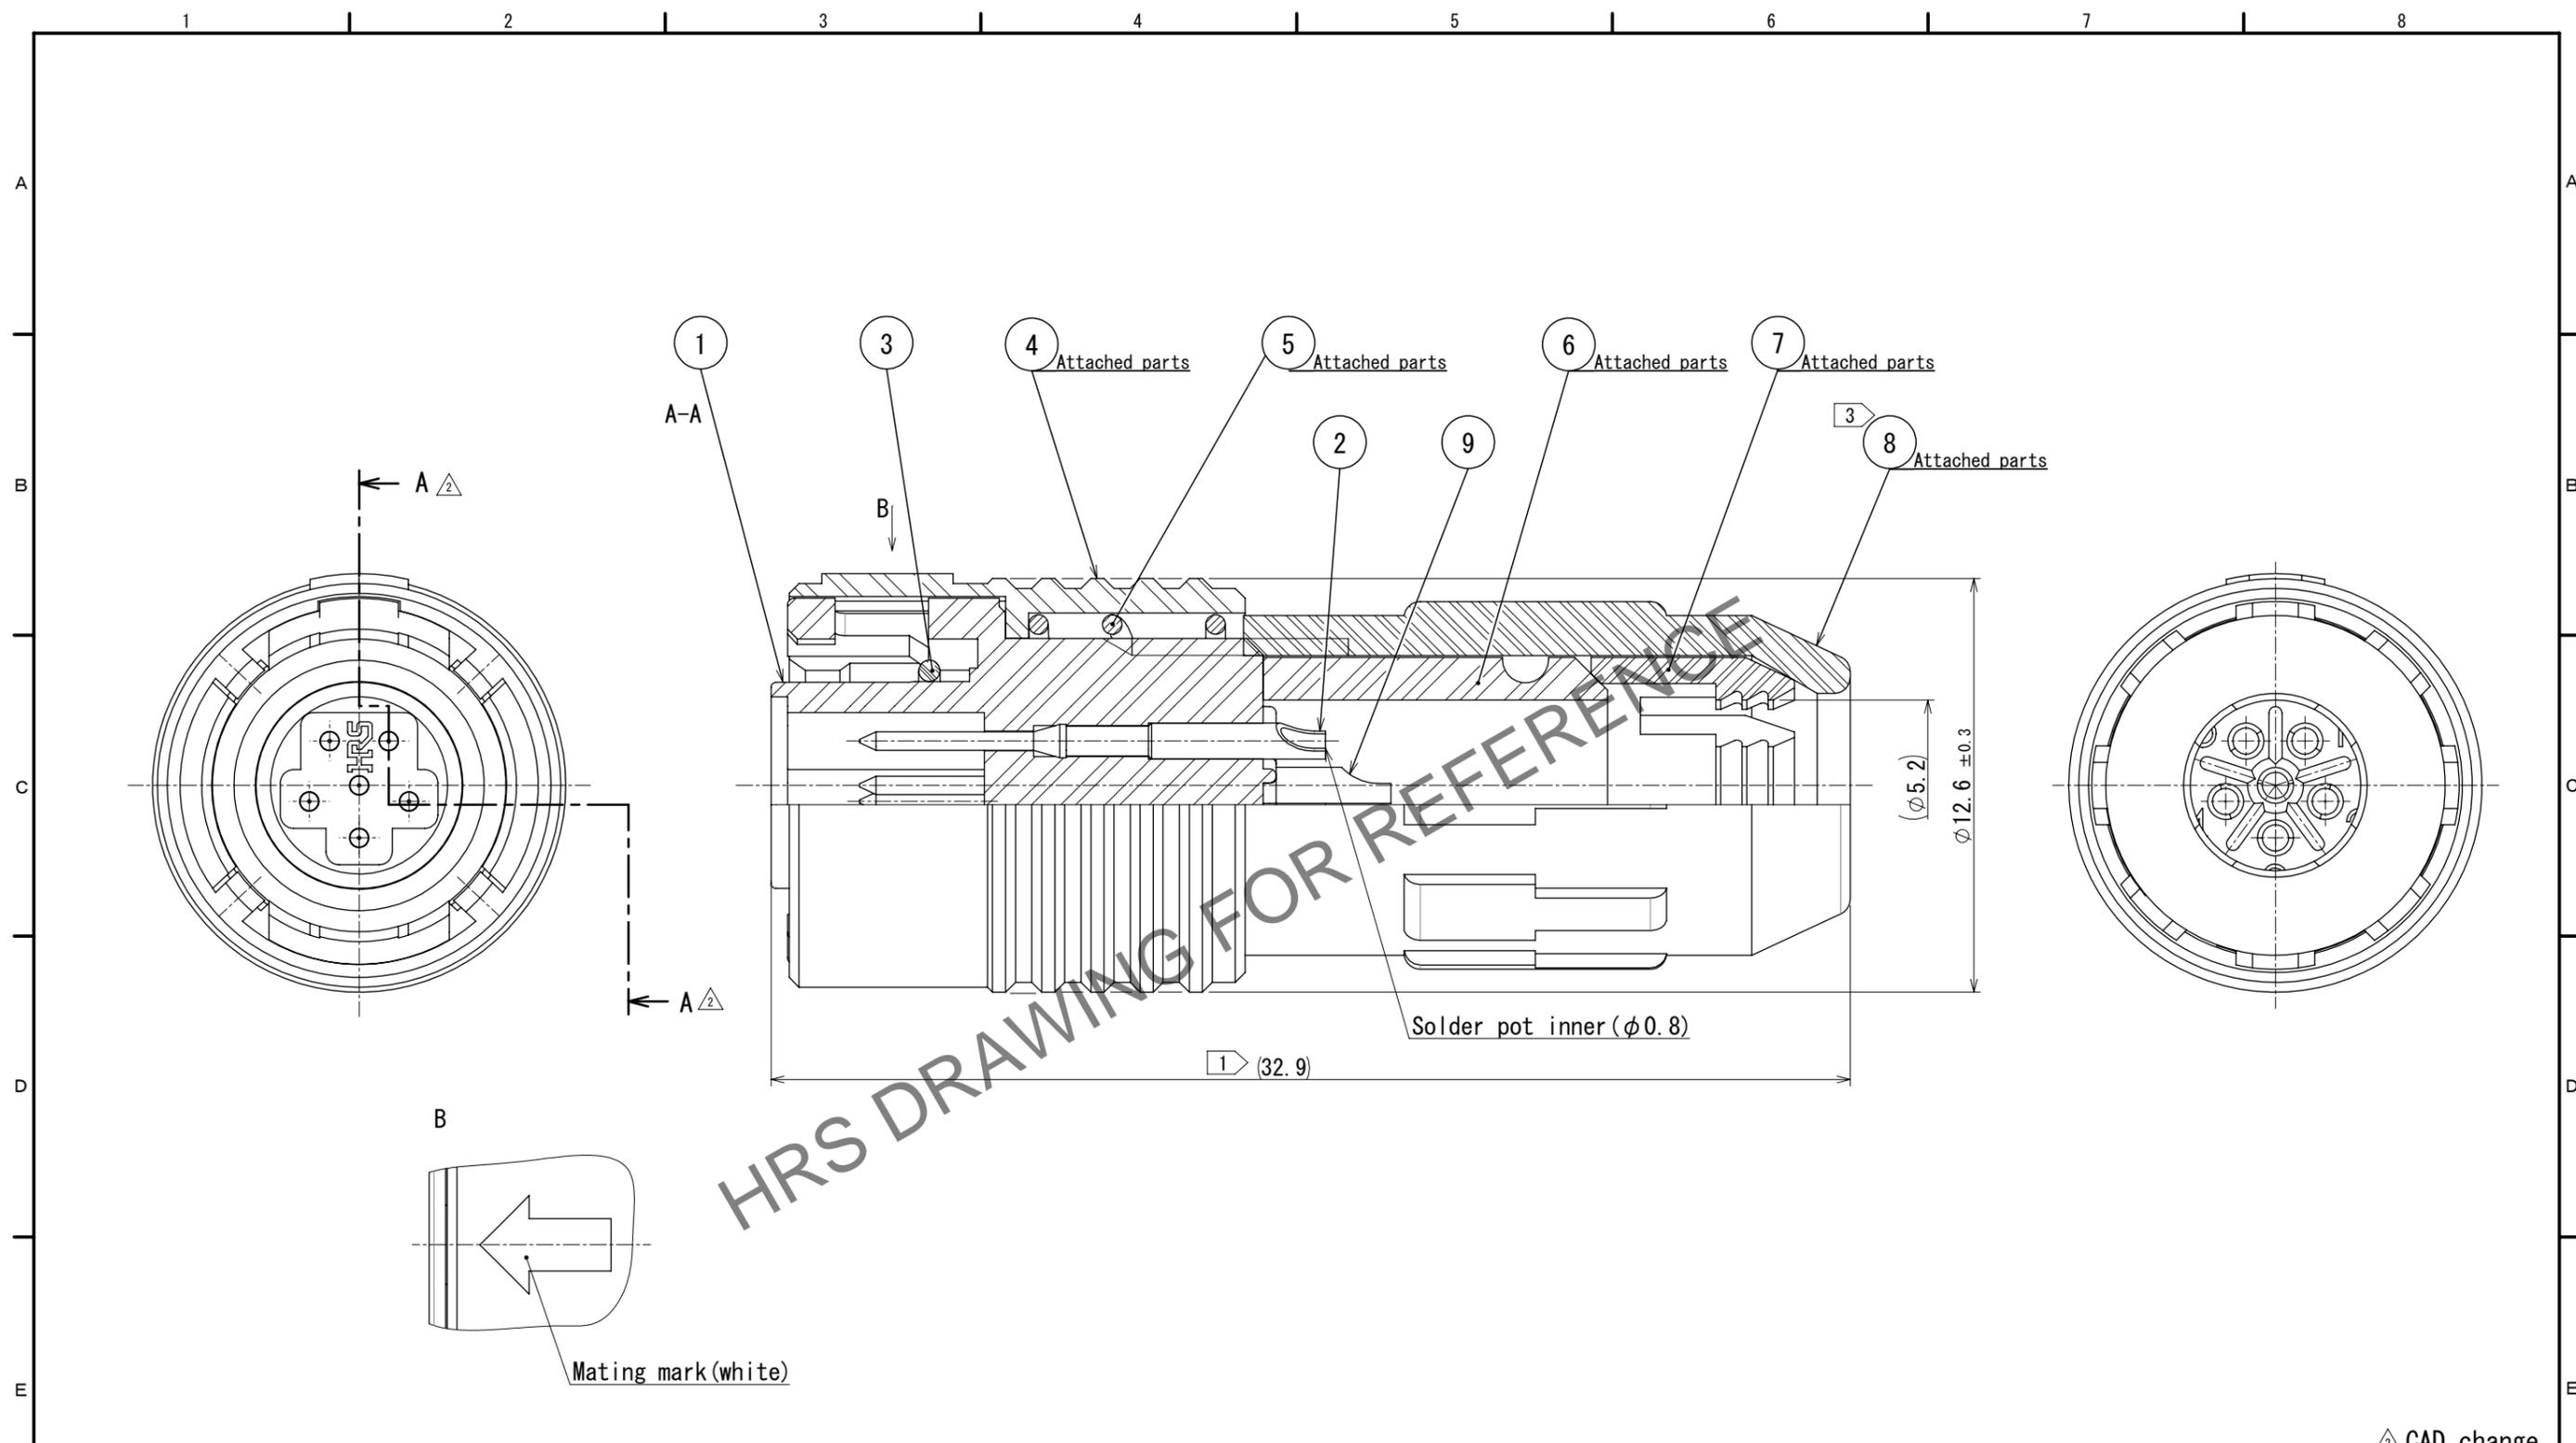

- Notes
- ① Total length becomes 30.3 ± 1 when Ref. No. ⑧ is screwed into Ref. No. ① completely.
 - ② Table for assembly and soldering is available HR30-6P-6P-T01.
 - ③ The recommended clamp torque of Ref. No. ⑧ to be 0.45 to 0.5N·m.
 To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00).
 Spacer for assembly is available HR30-6P-T02.
 - ④ Surface plating : gold plating $0.2 \mu\text{m}$ min.
 Under plating : nickel plating $2 \mu\text{m}$ min.
 - ⑤ The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.
 - ⑥ The assembly this product applies to the manual ETAD-C0509-00.

△ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
5	Stainless steel						
4	Polybutylene terephthalate	(Black)	UL94V-0	9	Brass		④
3	Silicone rubber	(Red)		8	Polybutylene terephthalate	(Black)	UL94V-0
2	Brass		④	7	Polyacetal	(Natural, Milky white)	
1	Polyphenylene sulfide	(Black)	UL94V-0	6	Chloroprene rubber	(Black)	

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5:1	② 3	DIS-C-00019240	KS. TAKAHASHI	TP. KOMATSU	2025.02.06
APPROVED : HY. KOBAYASHI			2018.02.26	DRAWING NO. EDC-112010-31-00		
CHECKED : HY. KOBAYASHI			2018.02.26	PART NO. HR30-6P-6P (31)		
DESIGNED : DS. MATSUNE			2018.02.26	CODE NO. CL0130-0009-5-31		
DRAWN : DS. MATSUNE			2018.02.26			