



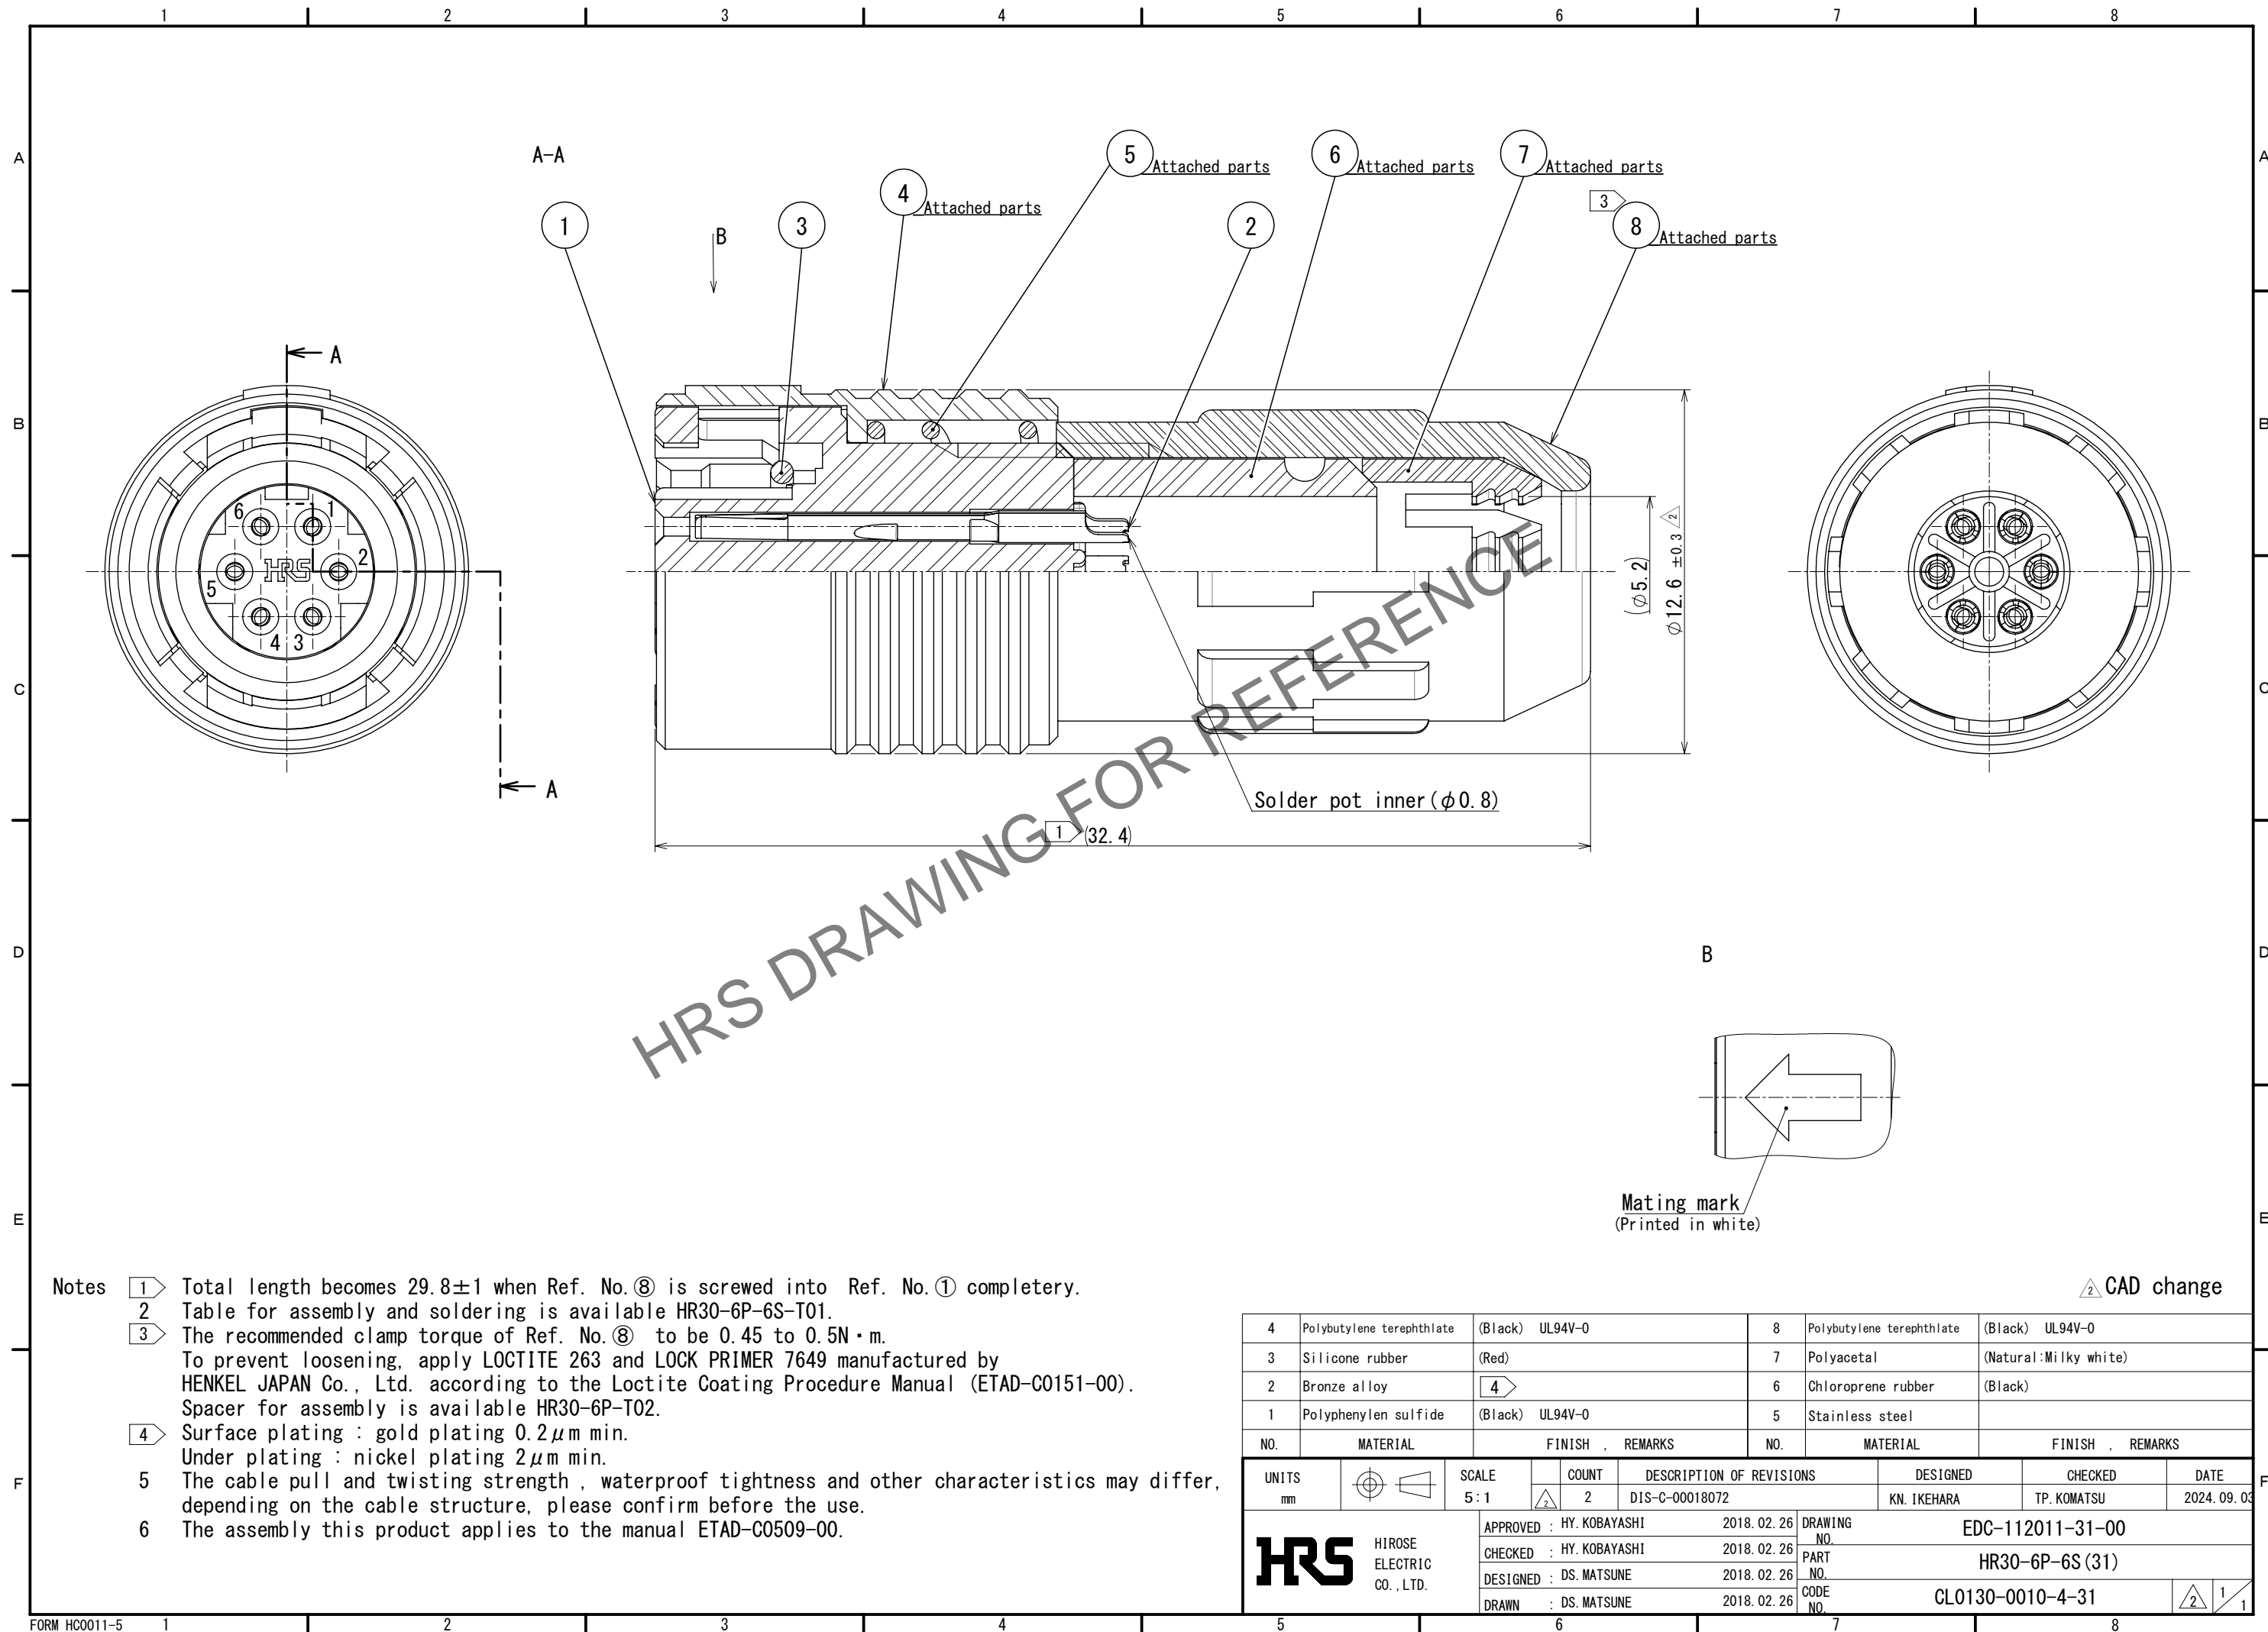


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes
- ① Total length becomes 29.8±1 when Ref. No. ⑧ is screwed into Ref. No. ① completely.
 - ② Table for assembly and soldering is available HR30-6P-6S-T01.
 - ③ The recommended clamp torque of Ref. No. ⑧ to be 0.45 to 0.5N・m. To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00). Spacer for assembly is available HR30-6P-T02.
 - ④ Surface plating : gold plating 0.2μm min. Under plating : nickel plating 2μm min.
 - ⑤ The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.
 - ⑥ The assembly this product applies to the manual ETAD-C0509-00.

4	Polybutylene terephthalate	(Black) UL94V-0	8	Polybutylene terephthalate	(Black) UL94V-0		
3	Silicone rubber	(Red)	7	Polyacetal	(Natural:Milky white)		
2	Bronze alloy	4	6	Chloroprene rubber	(Black)		
1	Polyphenylen sulfide	(Black) UL94V-0	5	Stainless steel			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS	

UNITS mm		SCALE 5 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00018072		DESIGNED KN. IKEHARA	CHECKED TP. KOMATSU	DATE 2024. 09. 03
 HIROSE ELECTRIC CO., LTD.			APPROVED : HY. KOBAYASHI 2018. 02. 26		DRAWING NO. EDC-112011-31-00				
			CHECKED : HY. KOBAYASHI 2018. 02. 26		PART NO. HR30-6P-6S (31)				
			DESIGNED : DS. MATSUNE 2018. 02. 26		CODE NO. CL0130-0010-4-31				
			DRAWN : DS. MATSUNE 2018. 02. 26		 1				