

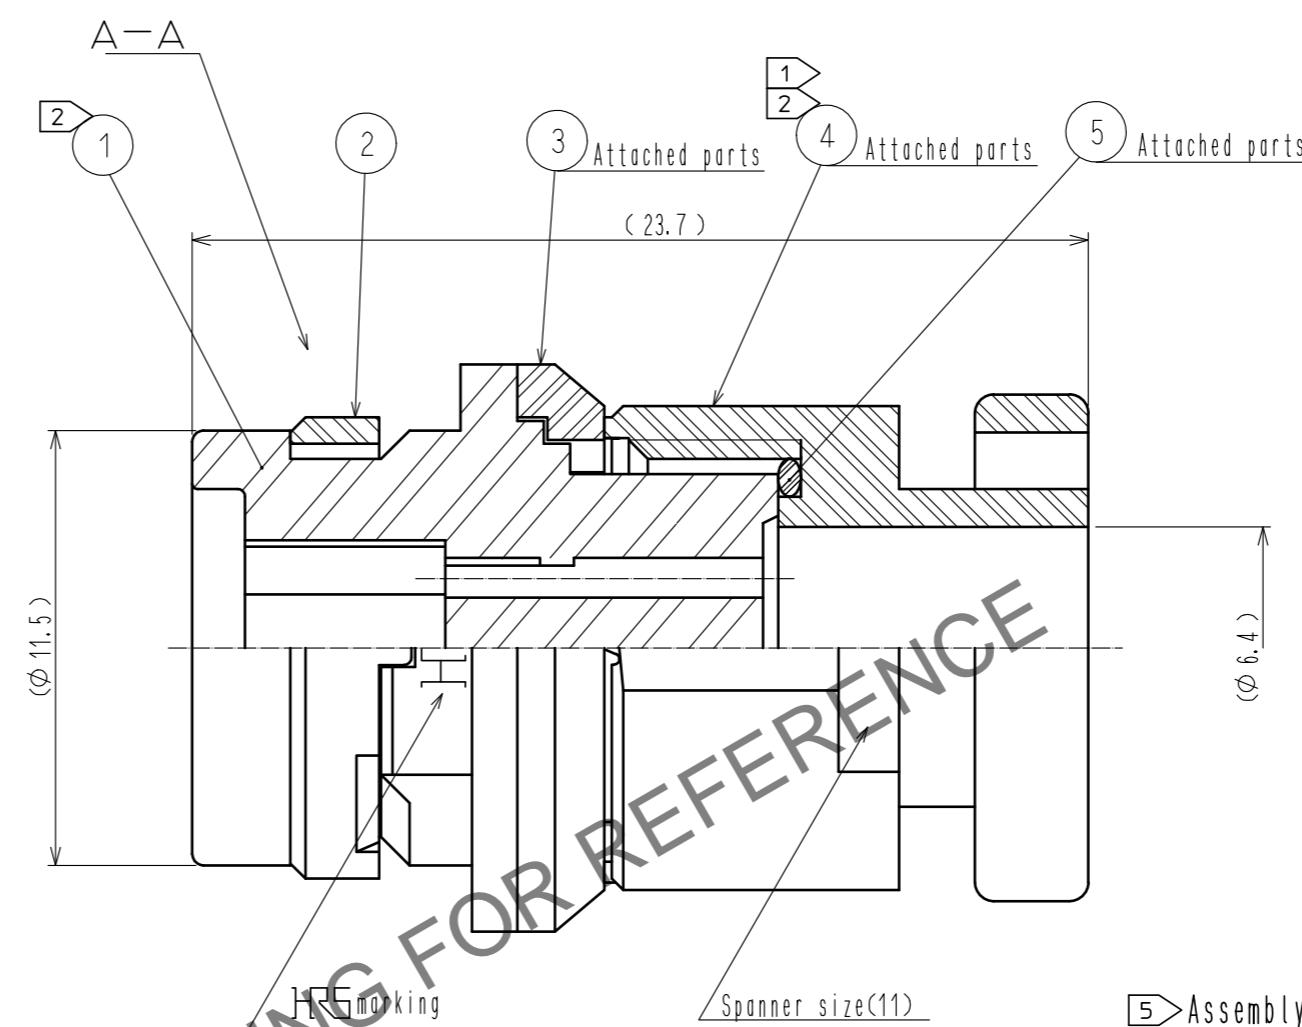



B
C
D
E

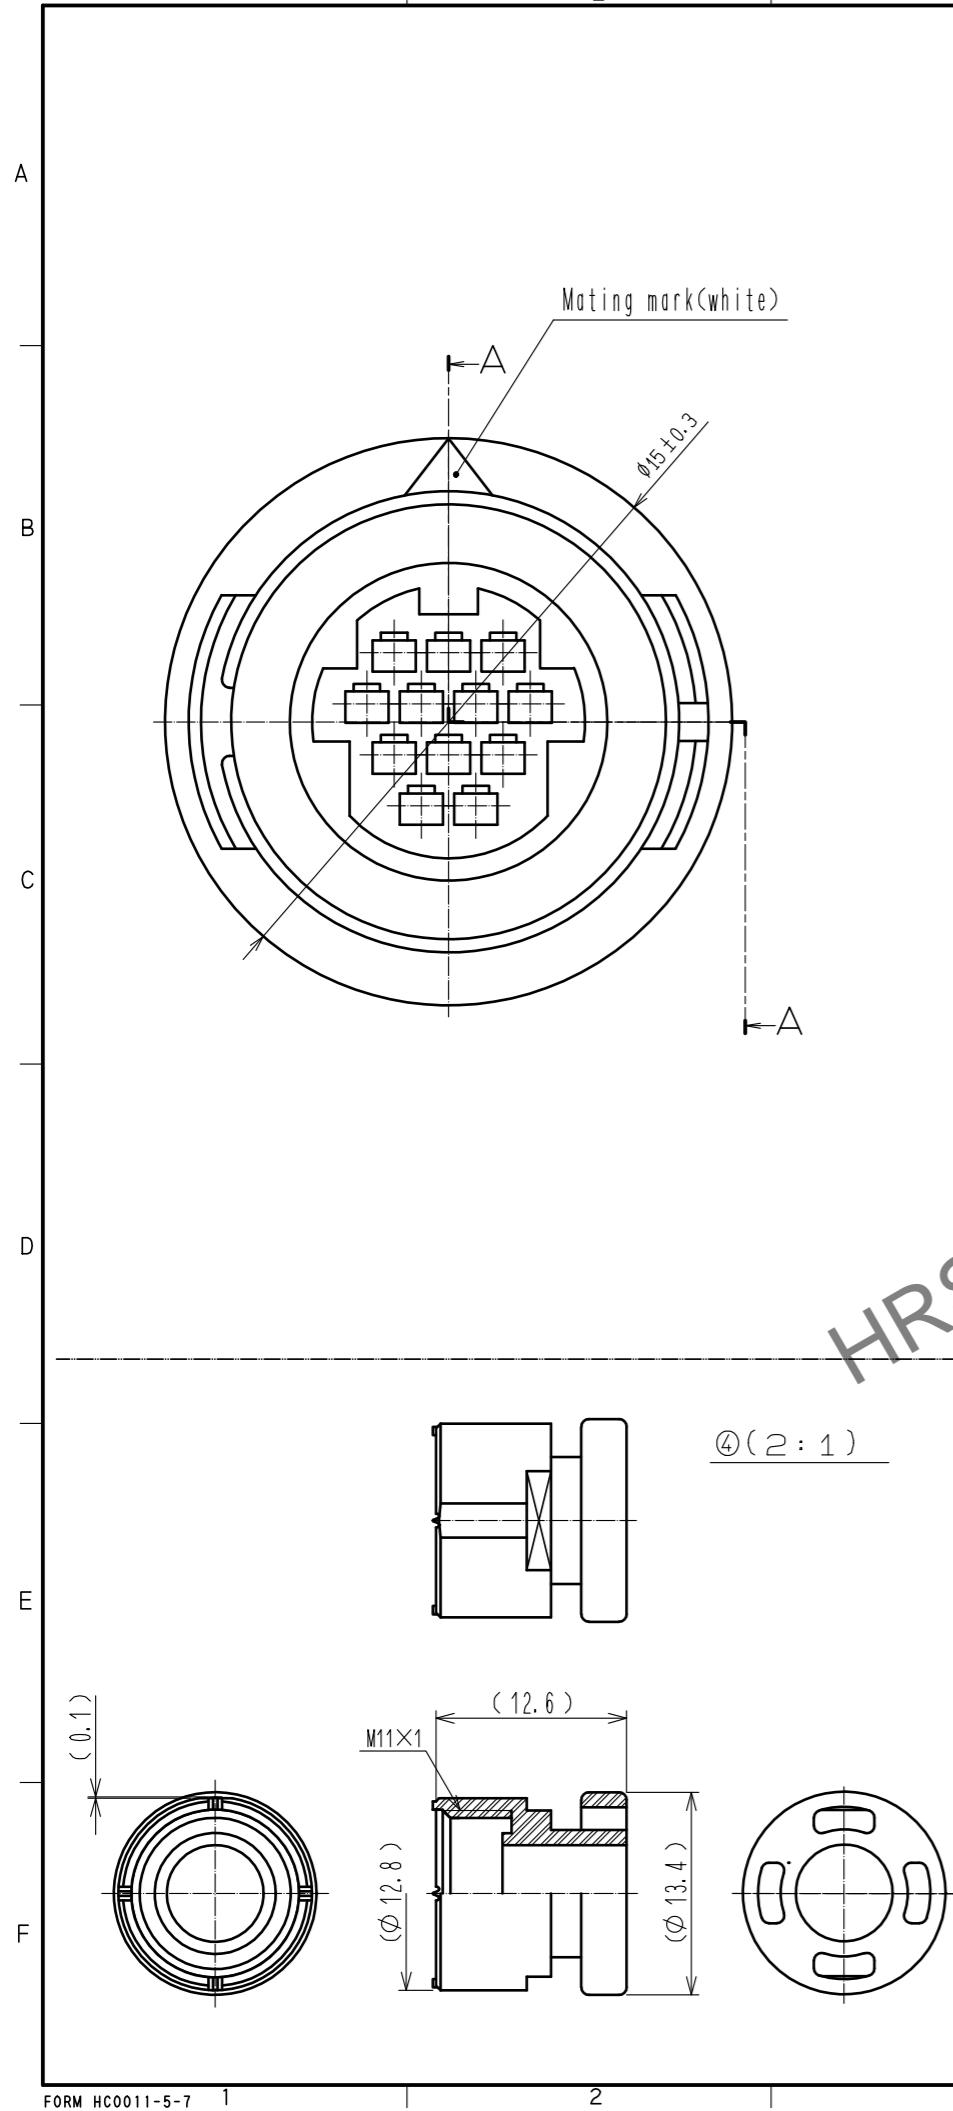


Contact position arrangement
The contact configuration depict a view from the wiring side



5>Assembly procedure(2:1)

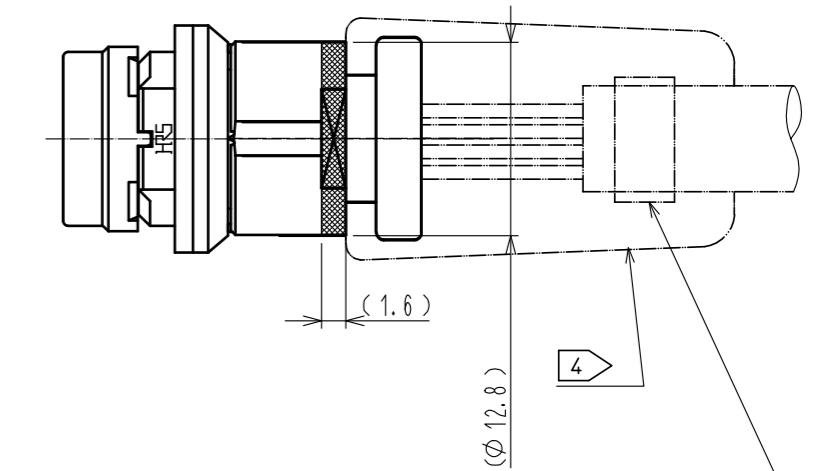

The use of the clamp fitting is recommended.

3	Polybutylene terephthalate	(Black) UL94V-0				
2	Polyphenylene sulfide	(Black) UL94V-0	5	Silicone rubber	(Red)	
1	Polyphenylene sulfide	(Black) UL94V-0	4	Polybutylene terephthalate	(Black) UL94V-0	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
UNITS mm	SCALE 5 : 1	COUNT ▲ 1	DESCRIPTION OF REVISIONS DIS-C-00015069		DESIGNED HY. KISHI	CHECKED HY. KOBAYASHI DATE 20230411
 HIROSE ELECTRIC CO., LTD.	APPROVED : SU. OBARA		20091209	DRAWING NO.	EDC3-116508-00	
	CHECKED : HY. KISHI		20091209	PART NO.	HR30-7JB-12PC	
	DESIGNED : TY. SUZUKI		20091209	CODE NO.	CL0130-2022-4-00	▲ 1
	DRAWN : TY. SUZUKI		20091209			