
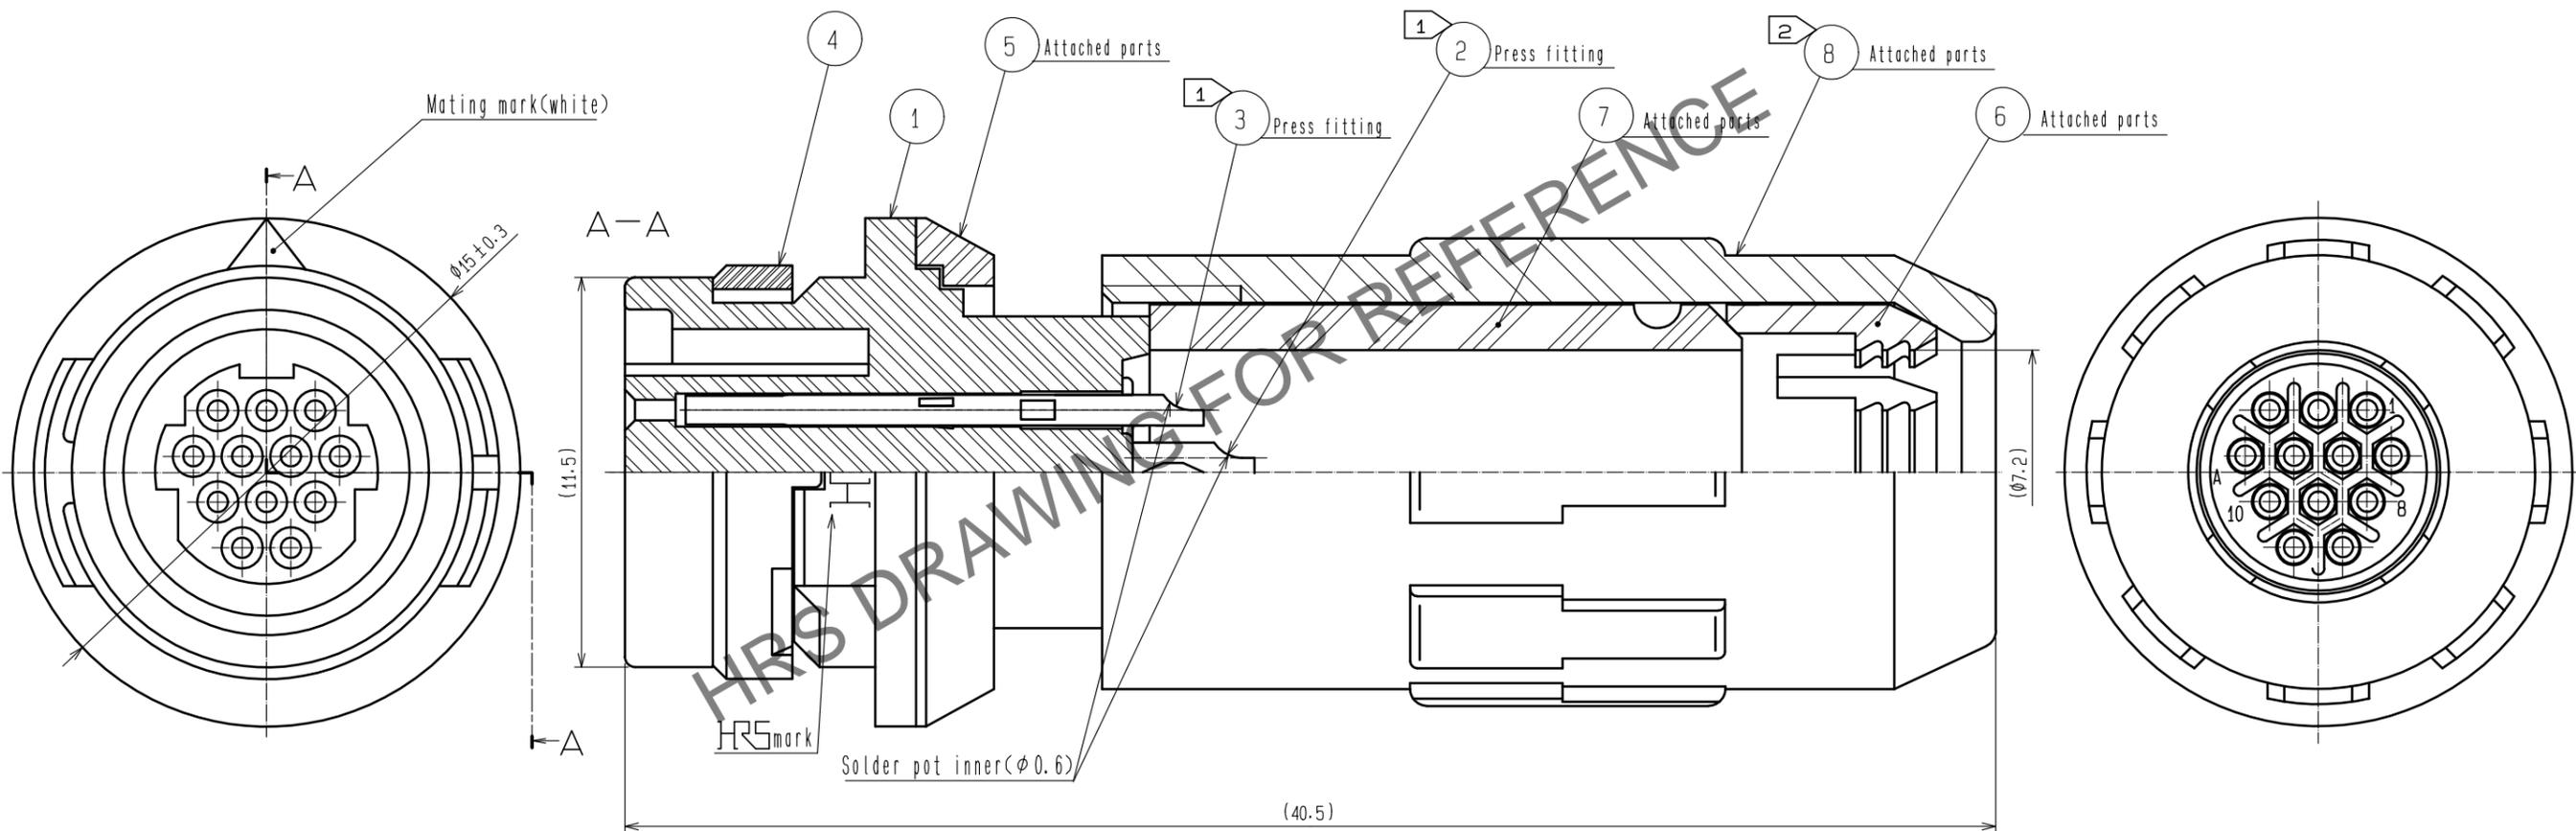


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Life size(1:1)

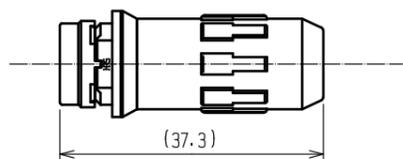

- Notes
- ① Plating(Ref. No. ②, ③)  
 Contact area : gold plating 0.2 $\mu$ m min.  
 Lead area : gold plating flash.  
 Under plating : nickel plating 2 $\mu$ m min.
  - ② Recommended tightening torque of Ref. No. ⑧ : 0.45~0.5N·m.  
 To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00).
  - ③ Applicable jigs  
 Solder termination fixture :HR30-8J-12SC-T01(CL150-0226-8)  
 Tightening collar for back shell(Ref.No. ⑧) :HR30-8P-T02(CL150-0224-2)
  - ④ The cable pull and twisting strength and other characteristics may differ, depending on the cable structure.  
 Please confirm before the use.
  - ⑤ The assembly this product applies to the manual ETAD-C0476-00.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
4	PPS	(Black) UL94V-0	8	PPS	(Black) UL94V-0
3	Phosphor bronze	①	7	CR	(Black)
2	Phosphor bronze	①	6	Polyacetal	(Natural)
1	PPS	(Black) UL94V-0	5	PBT	(Black) UL94V-0

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	2	DIS-C-00014969	HY. KISHI	HY. KOBAYASHI	20230404
APPROVED :MO. SATOH			20051021	DRAWING NO. EDC3-113841-71		
CHECKED :MO. SATOH			20051021	PART NO. HR30-8J-12S(71)		
DESIGNED :EJ. KUNII			20051021	CODE NO. CL0130-2019-0-71		
DRAWN :EJ. KUNII			20051021	② 1/1		