



Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

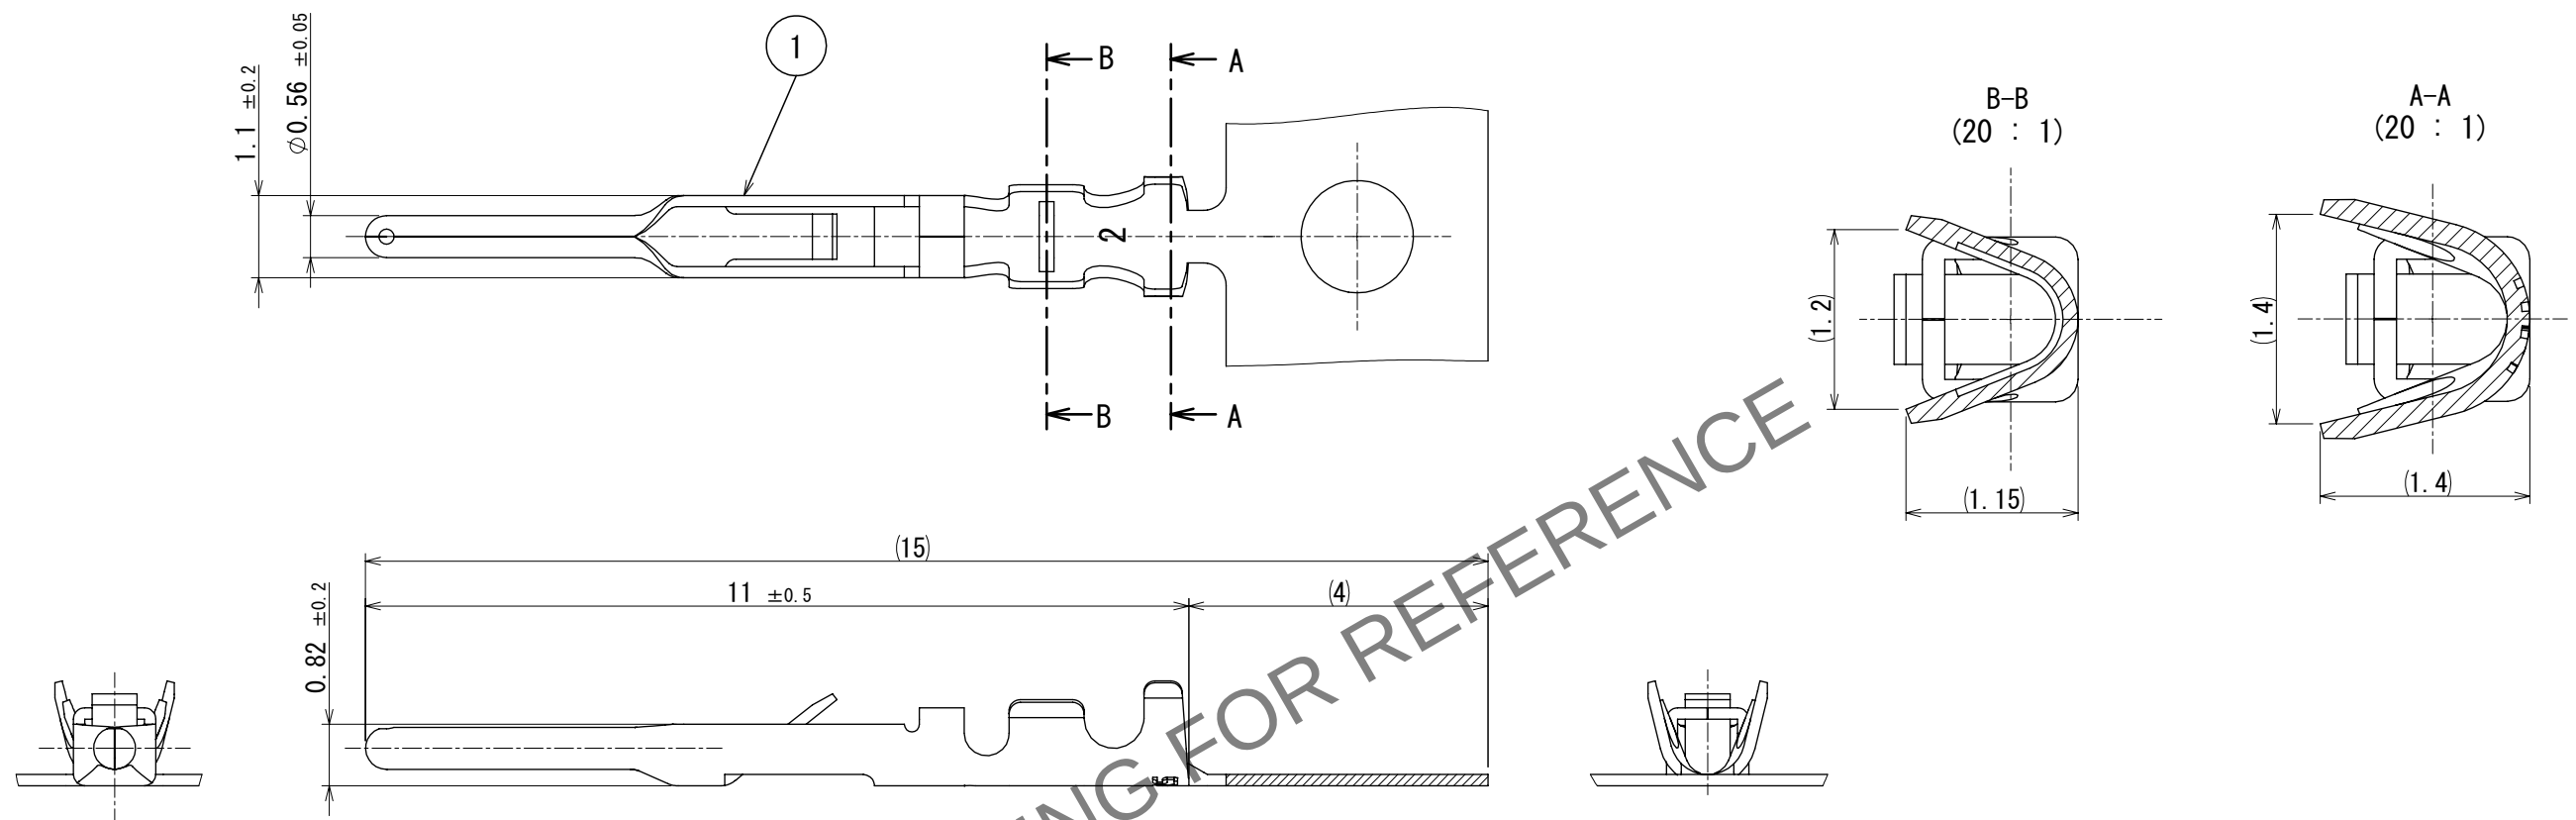

3 Fig.1 Recommended cable preparation dimensions

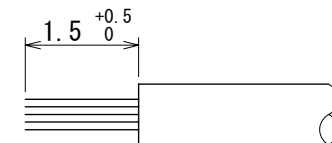

- Notes 1 This product is apply to the wire 26 to 30 AWG(wire jacket diameter $\phi 1$ max).
2 Per reel:10000 contacts
3 Recommended cable preparation dimensions are shown in Fig.1.

△ CAD change

1	Phosphor bronze	Selective gold plating	2	Carton	(Terminal winding reel)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 10:1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00018361	DESIGNED KN. IKEHARA
		APPROVED : MR. YOSHIDA	2005. 01. 05	DRAWING NO.	EDC-112452-00-00
		CHECKED : MO. SATOH	2005. 01. 05	PART NO.	HR30-PC-211
		DESIGNED : YH. YAMADA	2005. 01. 05	CODE NO.	CL0130-0016-0-00
		DRAWN : YH. YAMADA	2005. 01. 05		