

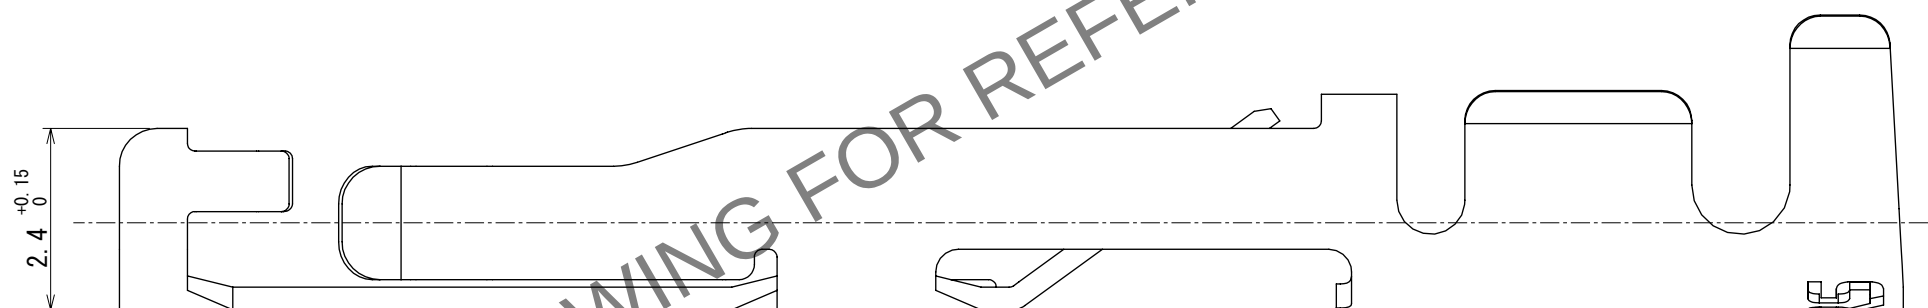
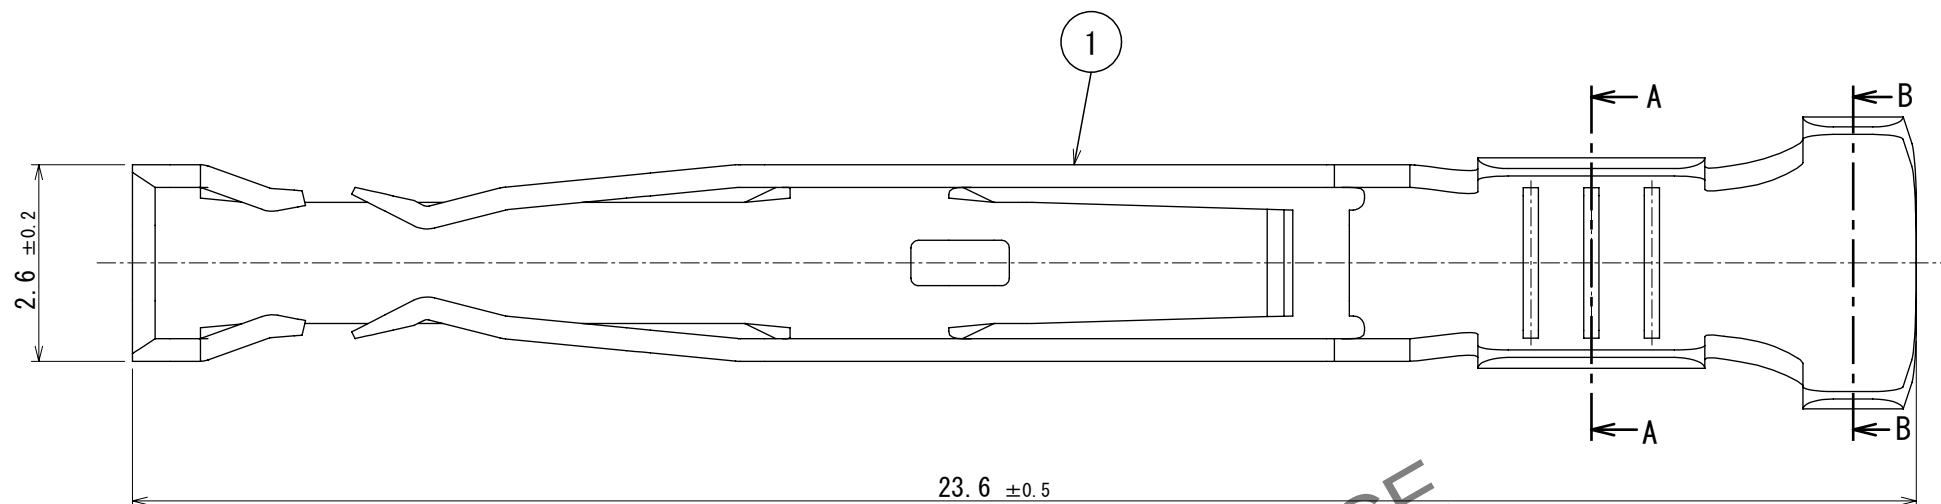



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

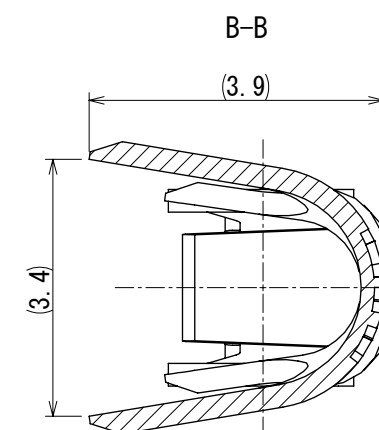

HRS DRAWING FOR REFERENCE

- Notes
- 1 This product is apply to the wire #16 to #20.
(Jacket diameter : $\phi 1.9$ to 3.2mm)
 - 2 Applicable crimping tool : HT802/HR41A-11-16 (CL150-0408-5) (Applicable to AWG#16)
HT802/HR41A-11-18 (CL150-0404-4) (Applicable to AWG#18)
HT802/HR41A-11-20 (CL150-0407-2) (Applicable to AWG#20)
 - 3 Applicable extraction tool : HR41A-TP (CL150-0405-7)
 - 4 Per reel : 100 contacts
 - 5 Contact plating : Gold plating $0.76\mu\text{m}$ min.
Terminal plating : Tin plating $0.5\mu\text{m}$ min.
Underplating : Nickel plating $2\mu\text{m}$ min.

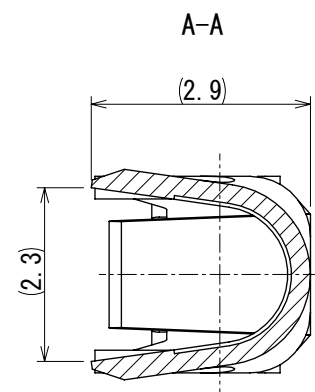

△ CAD change

1	Copper alloy	5						
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
UNITS mm		SCALE 10:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00019502	DESIGNED TY. SUZUKI	CHECKED KN. IKEHARA	DATE 2025. 03. 11	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : SU. OBARA	2014. 05. 16	DRAWING NO.	EDC-118388-00-00			
		CHECKED : HY. KISHI	2014. 05. 16	PART NO.	HR41A-SC-111			
		DESIGNED : HN. TANAKA	2014. 05. 15	CODE NO.	CL0141-0213-5-00			
		DRAWN : HN. TANAKA	2014. 05. 15					