


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

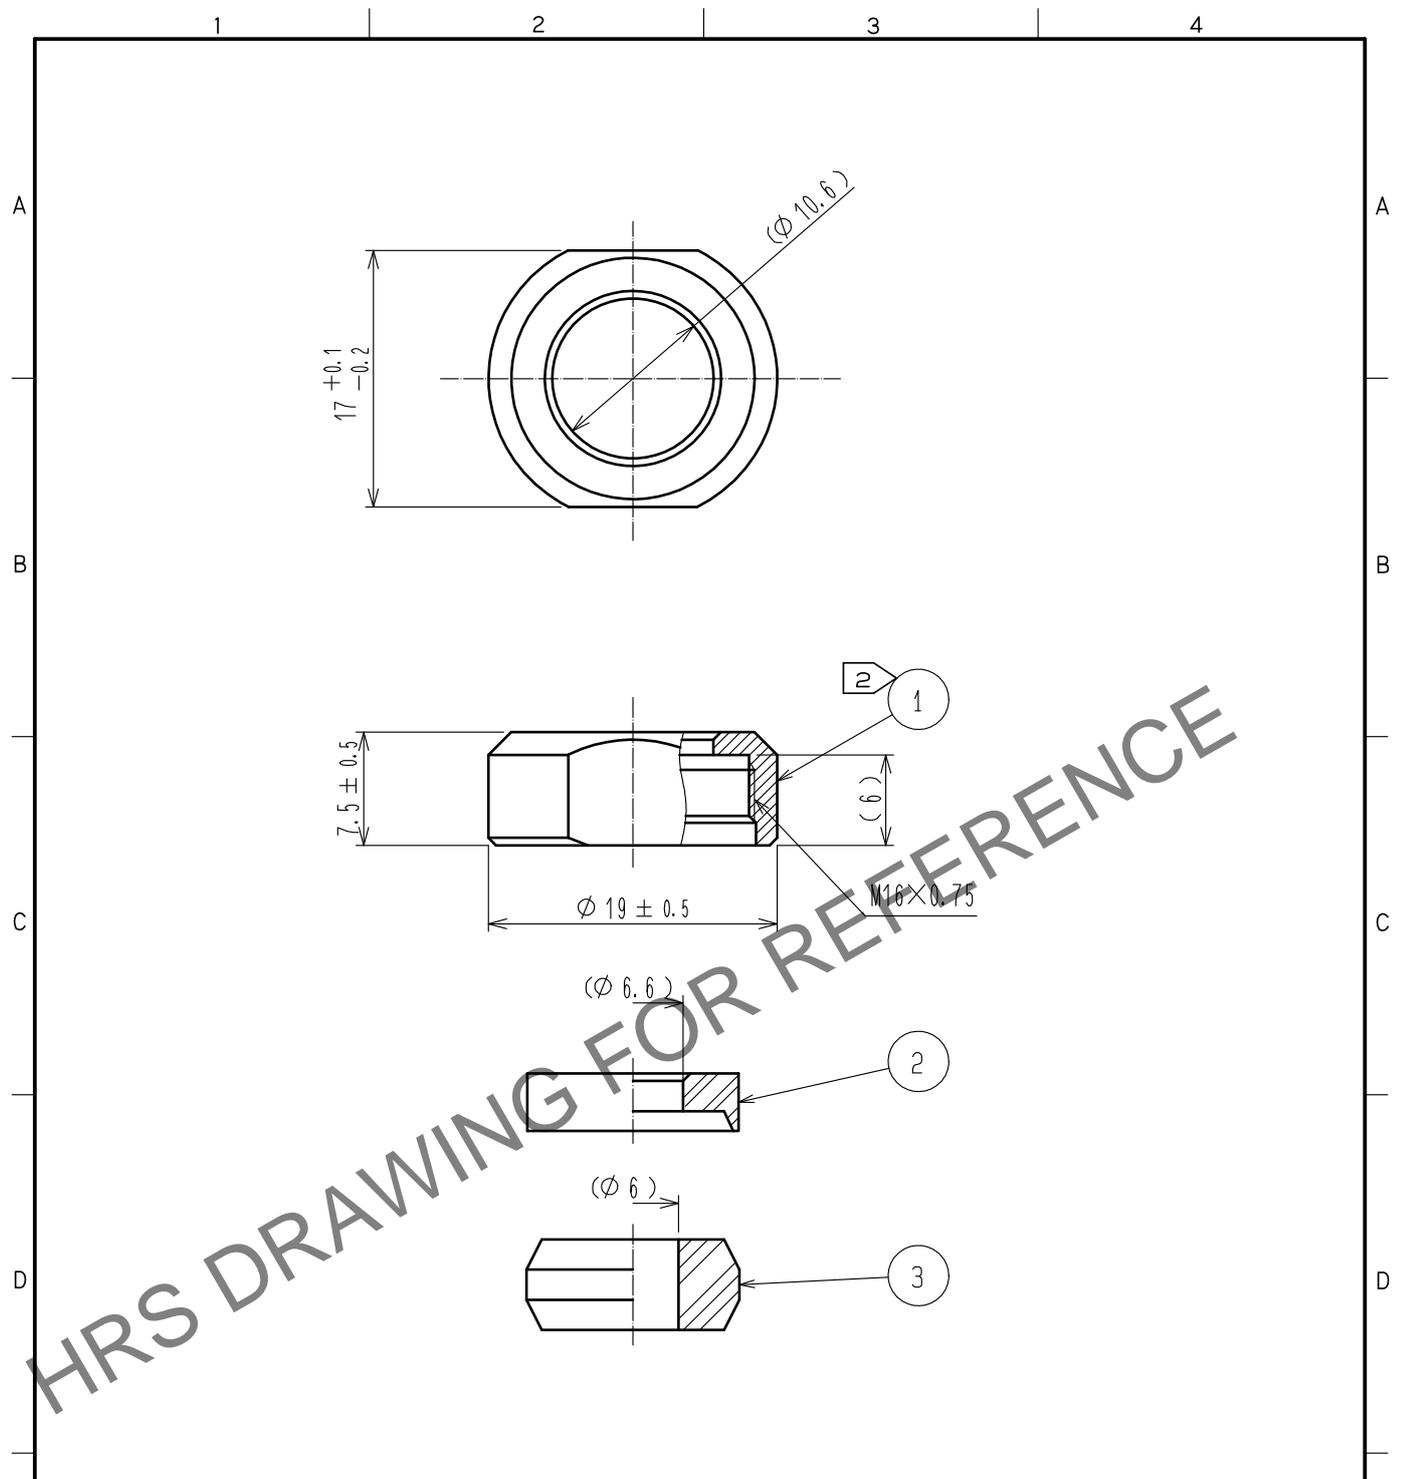

HRS DRAWING FOR REFERENCE

- Notes
- 1 This product is delivered disassembled.
 - 2 The recommended clamp torque of Ref.No. ① to be 2 to 2.5N · m.
 LOCTITE 263, Henkel Japan or equivalent is recommended to prevent Ref.No. ① from loosening.
 - 3 The cable pull and twisting strength and other characteristics may differ, depending on the cable structure. please before the use.

| 2 | POLYPHENYLENE SULFIDE (BLACK) | UL94V-0 | | | |
|---------------------------|-------------------------------|-------------------------|------------|---------------------------------------|------------------|
| 1 | BRASS | BLACK CROME PLATING | 3 | ACRYLONITRILE BUTADIENE RUBBER (GRAY) | |
| NO. | MATERIAL | FINISH . REMARKS | NO. | MATERIAL | FINISH . REMARKS |
| UNITS mm | | SCALE 2 : 1 | COUNT | DESCRIPTION OF REVISIONS | DESIGNED |
| HIROSE ELECTRIC CO., LTD. | | APPROVED :HY. KOBAYASHI | 15. 08. 18 | DRAWING NO. | EDC-110620-71-00 |
| | | CHECKED :HY. KOBAYASHI | 15. 08. 18 | PART NO. | JR13WCCA-6(71) |
| | | DESIGNED :HY. KISHI | 15. 08. 18 | CODE NO. | CL114-2071-0-71 |
| | | DRAWN :HY. KISHI | 15. 08. 18 | | |