


Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

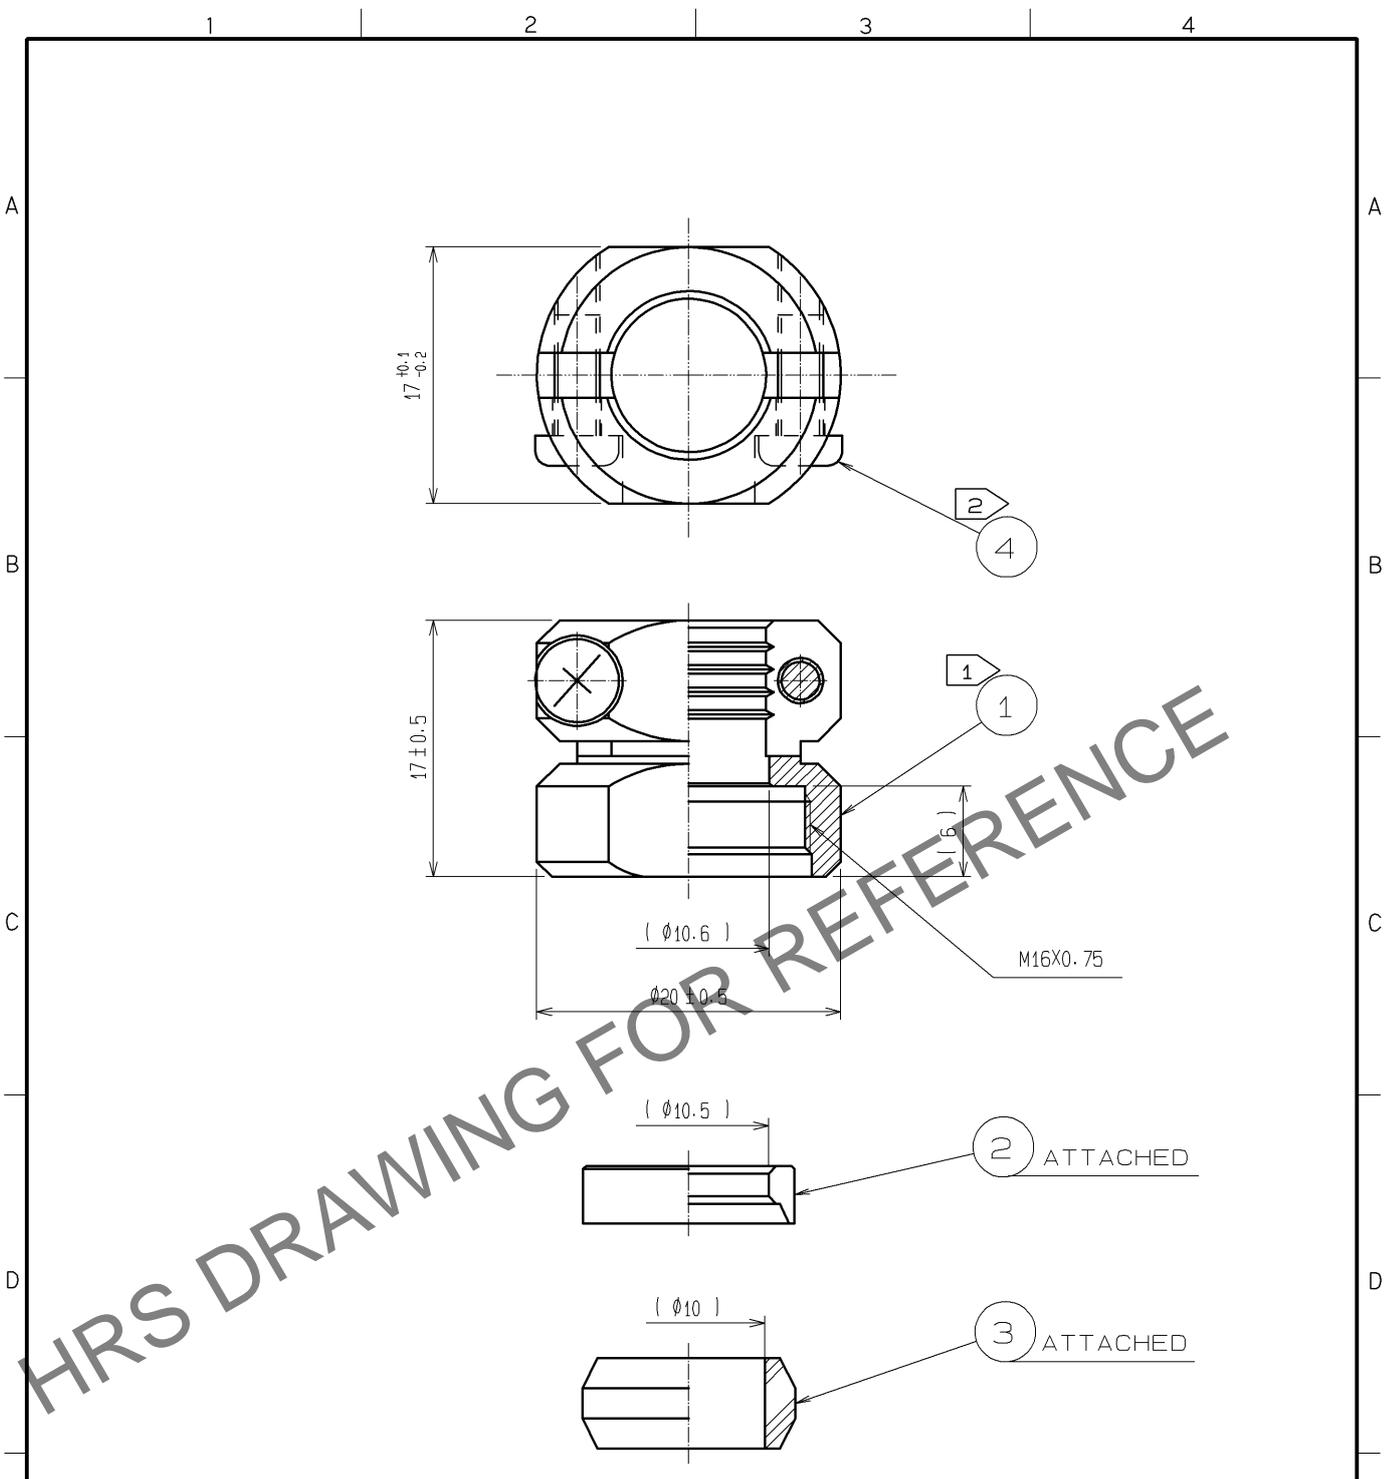

HRS DRAWING FOR REFERENCE

- ① THE RECOMMENDED CLAMP TRQUE OF REF. ① TO BE 2 TO 2.5N·m
 LOCTITE 271, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDND TO PREVENT
 REF. NO. ① FROM LOOSENING.
- ② THE RECOMMENDED CLAMP TRQUE OF REF. ④ TO BE 0.65 TO 0.7N·m

| 2 | BRASS | NICKEL PLATING | 4 | STAINLESS STEEL | M3X0.5X8 |
|---------------------------|----------|------------------------|------------|--------------------------|------------------|
| 1 | BRASS | CHROME PLATING | 3 | SILICONE RUBBER | (BLACK) |
| NO. | MATERIAL | FINISH , REMARKS | NO. | MATERIAL | FINISH , REMARKS |
| UNITS mm | | SCALE 2 : 1 | COUNT | DESCRIPTION OF REVISIONS | DESIGNED |
| HIROSE ELECTRIC CO., LTD. | | APPROVED : MO. SATOH | 07. 12. 27 | DRAWING NO. | EDC4-110458-72 |
| | | CHECKED : YH. YAMADA | 07. 12. 27 | PART NO. | JR13WCC-10(72) |
| | | DESIGNED : DS. MATSUNE | 07. 12. 27 | CODE NO. | CL114-2051-3-72 |
| | | DRAWN : HN. TANAKA | 07. 12. 14 | | 1/1 |