


Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

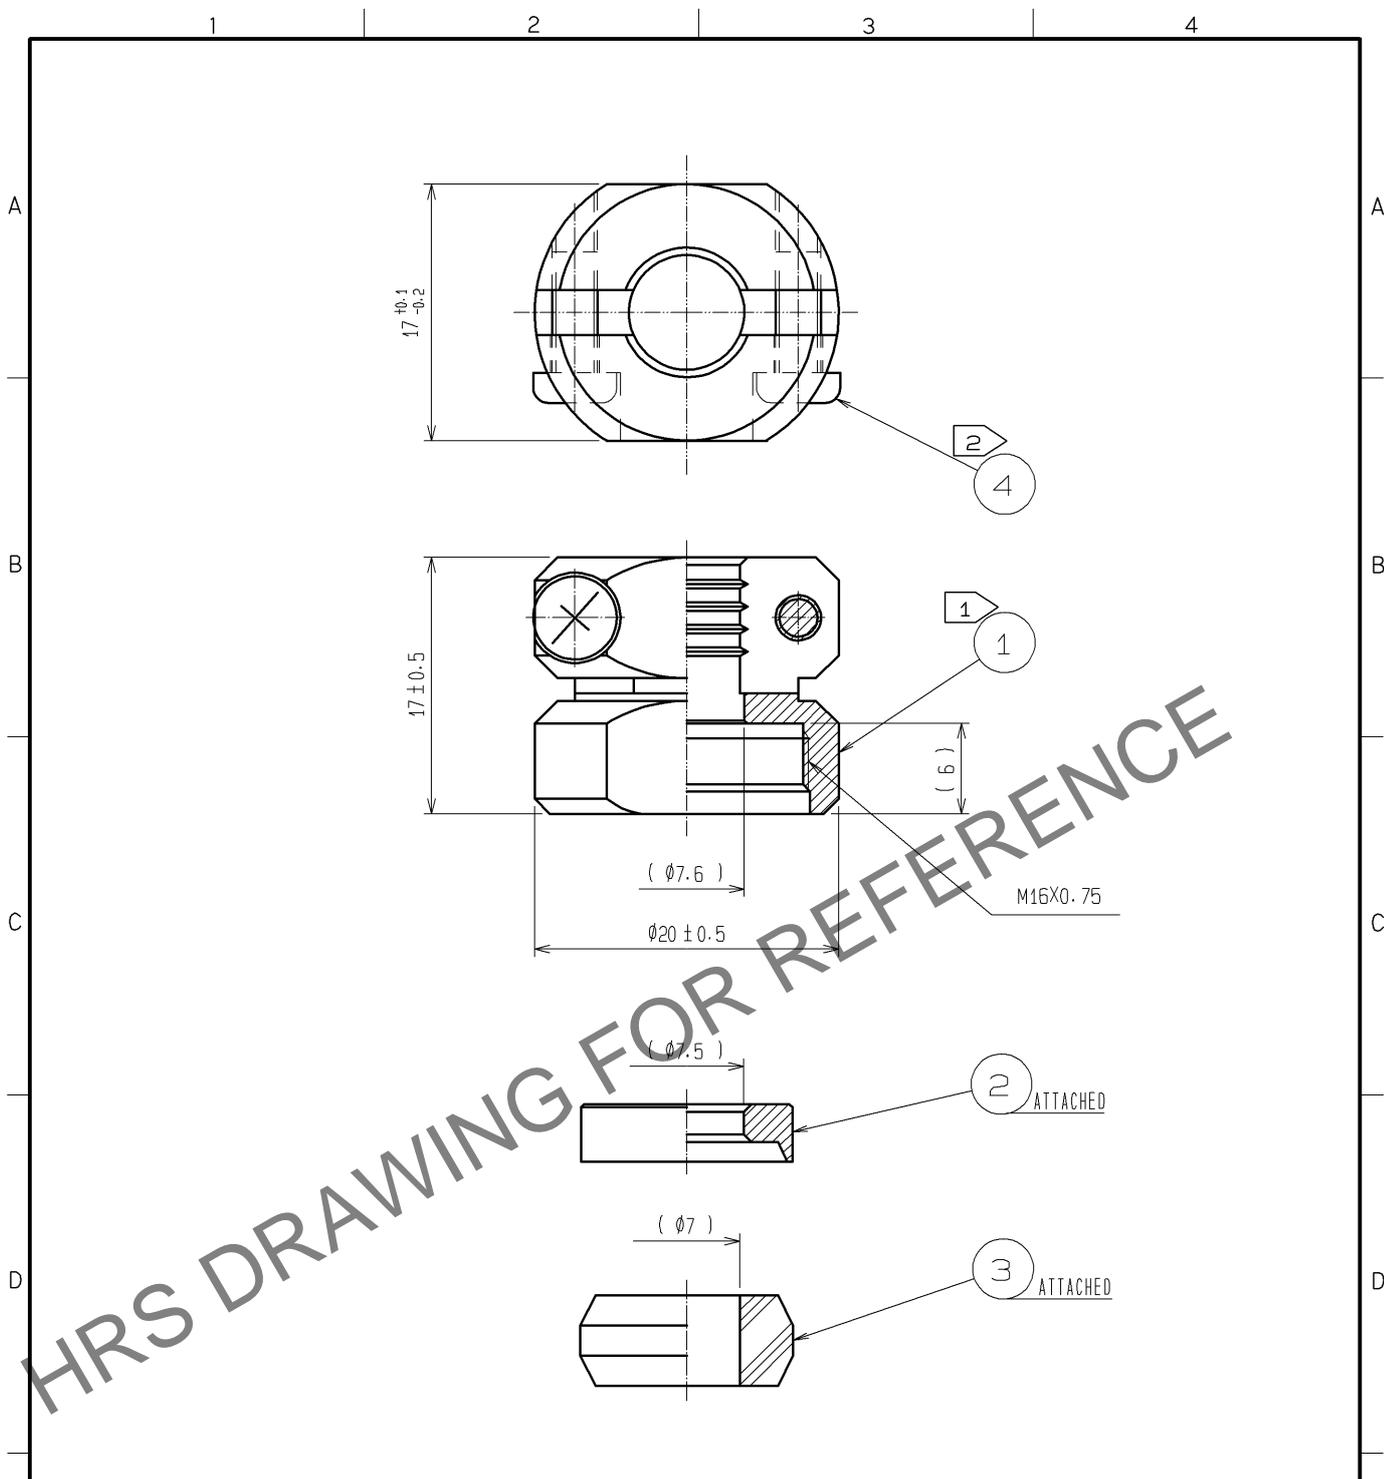

NOTES ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ① TO BE 2 TO 2.5 N · m.
LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ① FROM LOOSENING.
② THE RECOMMENDED CLAMP TORQUE OF REF. NO. ④ TO BE 0.65 TO 0.7 N · m.
③ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.

2	BRASS	NICKEL PLATING	4	STAINLESS STEEL	M3×0.5×8			
1	BRASS	CHROME PLATING	3	SILICONE RUBBER	(BLACK)			
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS	
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	12. 06. 05	DRAWING NO.		EDC4-110597-72		
		CHECKED : HY. KISHI	12. 06. 05	PART NO.		JR13WCC-7(72)		
		DESIGNED : HK. NAMAI	12. 06. 05	CODE NO.		CL114-2048-9-72		
		DRAWN : HK. NAMAI	12. 06. 05			1/1		