


Feb. 1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

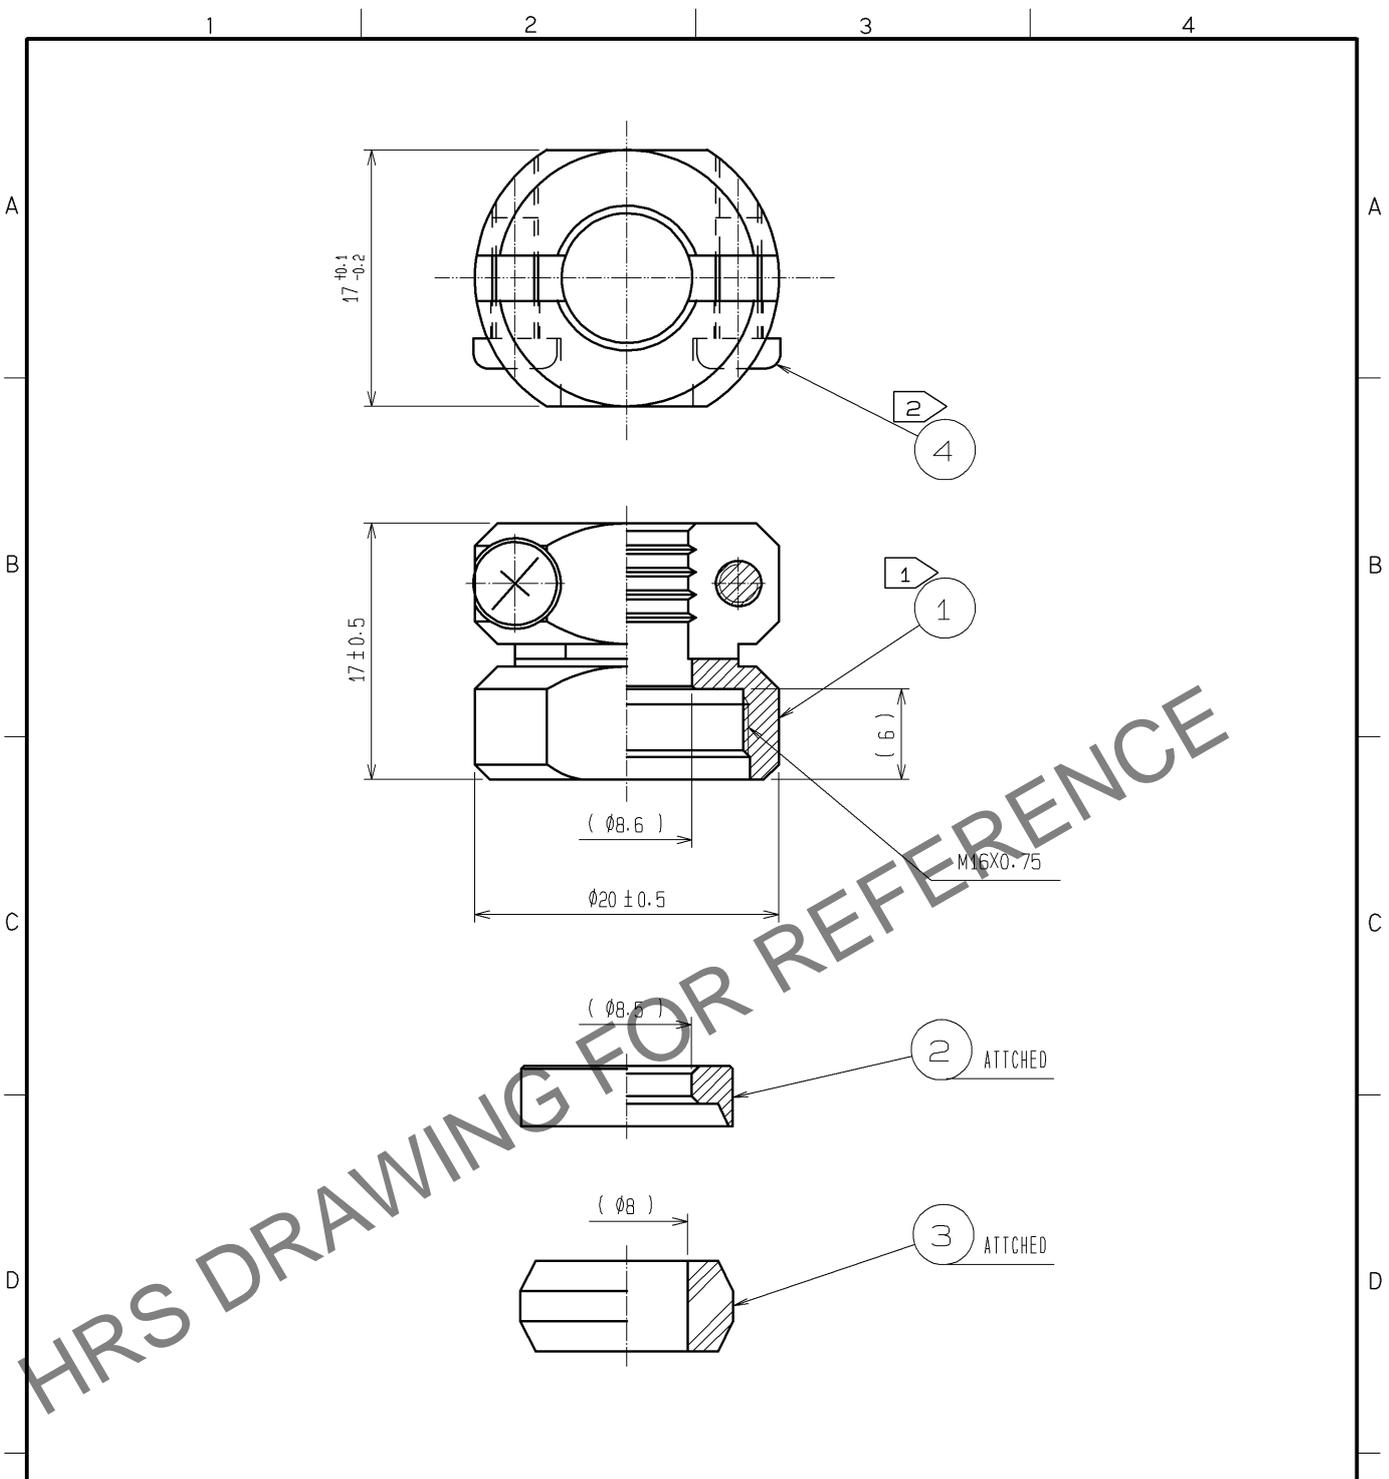

NOTES

- ① THE RECOMMENDED CLAMP TORQUE OF REF.NO. ① TO BE 3 N · m.  
LOCTITE 271, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO. ① FROM LOOSENING.
- ② THE RECOMMENDED CLAMP TORQUE OF REF.NO. ② TO BE 0.3 TO 0.35 N · m.
- ③ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.

2	BRASS	NICKEL PLATING	4	STAINLESS STEEL	M3×0.5×8
1	BRASS	CHROME PLATING	3	SILICONE RUBBER	(BLACK)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.				APPROVED : SU. OBARA 11. 07. 06 CHECKED : HY. KISHI 11. 07. 06 DESIGNED : HK. NAMAI 11. 07. 06 DRAWN : HK. NAMAI 11. 07. 06	DRAWING NO. EDC4-110598-72 PART NO. JR13WCC-8(72) CODE NO. CL114-2049-1-72		