
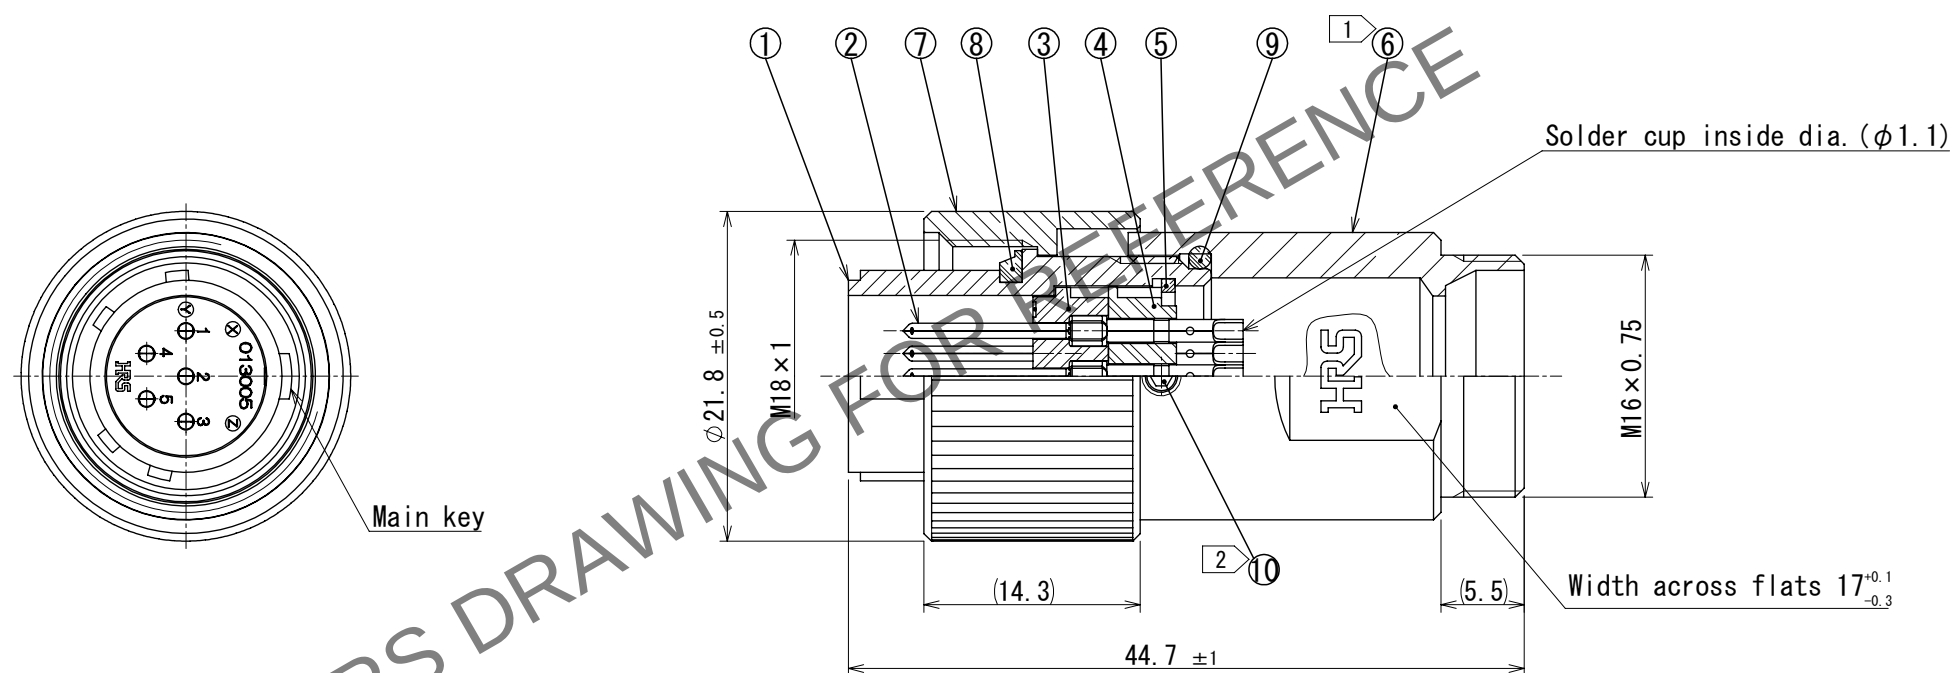


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes
- ① The recommended tightening torque of Ref.No. ⑥ shall be 2 to 2.5 N・m.
 - ② The recommended tightening torque of Ref.No. ⑩ shall be 0.2 to 0.25 N・m.
 - ③ One example of the rotation of Ref.No. ⑥ to Ref.No. ① is shown.
 - ④ Apply Loctite 263 HENKEL JAPAN or equivalent to the male threaded portion of Ref. No. ⑥ and ⑩ in order to prevent loosening.
 - ⑤ This products to be used with cable clamp, JR13WCC-*.
*designate diameter (mm) of applicable cable.
 - ⑥ The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.

5	Phosphor bronze	Nickel plating	10	Stainless steel	HEX:1.27
4	Polyphenylene sulfide	(Black) UL94V-0	9	Silicon rubber	(Black)
3	Polyphenylene sulfide	(Black) UL94V-0	8	Silicon rubber	(Black)
2	Copper alloy	Silver plating 3μm min.	7	Brass	Black chrome plating
1	Aluminum alloy	Black chrome plating	6	Brass	Black chrome plating
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2:1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE

HRS HIROSE ELECTRIC CO.,LTD.	APPROVED : EJ. KUNII	2023. 12. 07	DRAWING NO.	EDC-404958-00-00	
	CHECKED : EJ. KUNII	2023. 12. 07	PART NO.	JR13WPH-5P	
	DESIGNED : SY. KONDO	2023. 12. 07	CODE NO.	CL0114-0062-0-00	
	DRAWN : KR. SUZUKI	2023. 12. 07			

	
---	---