


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

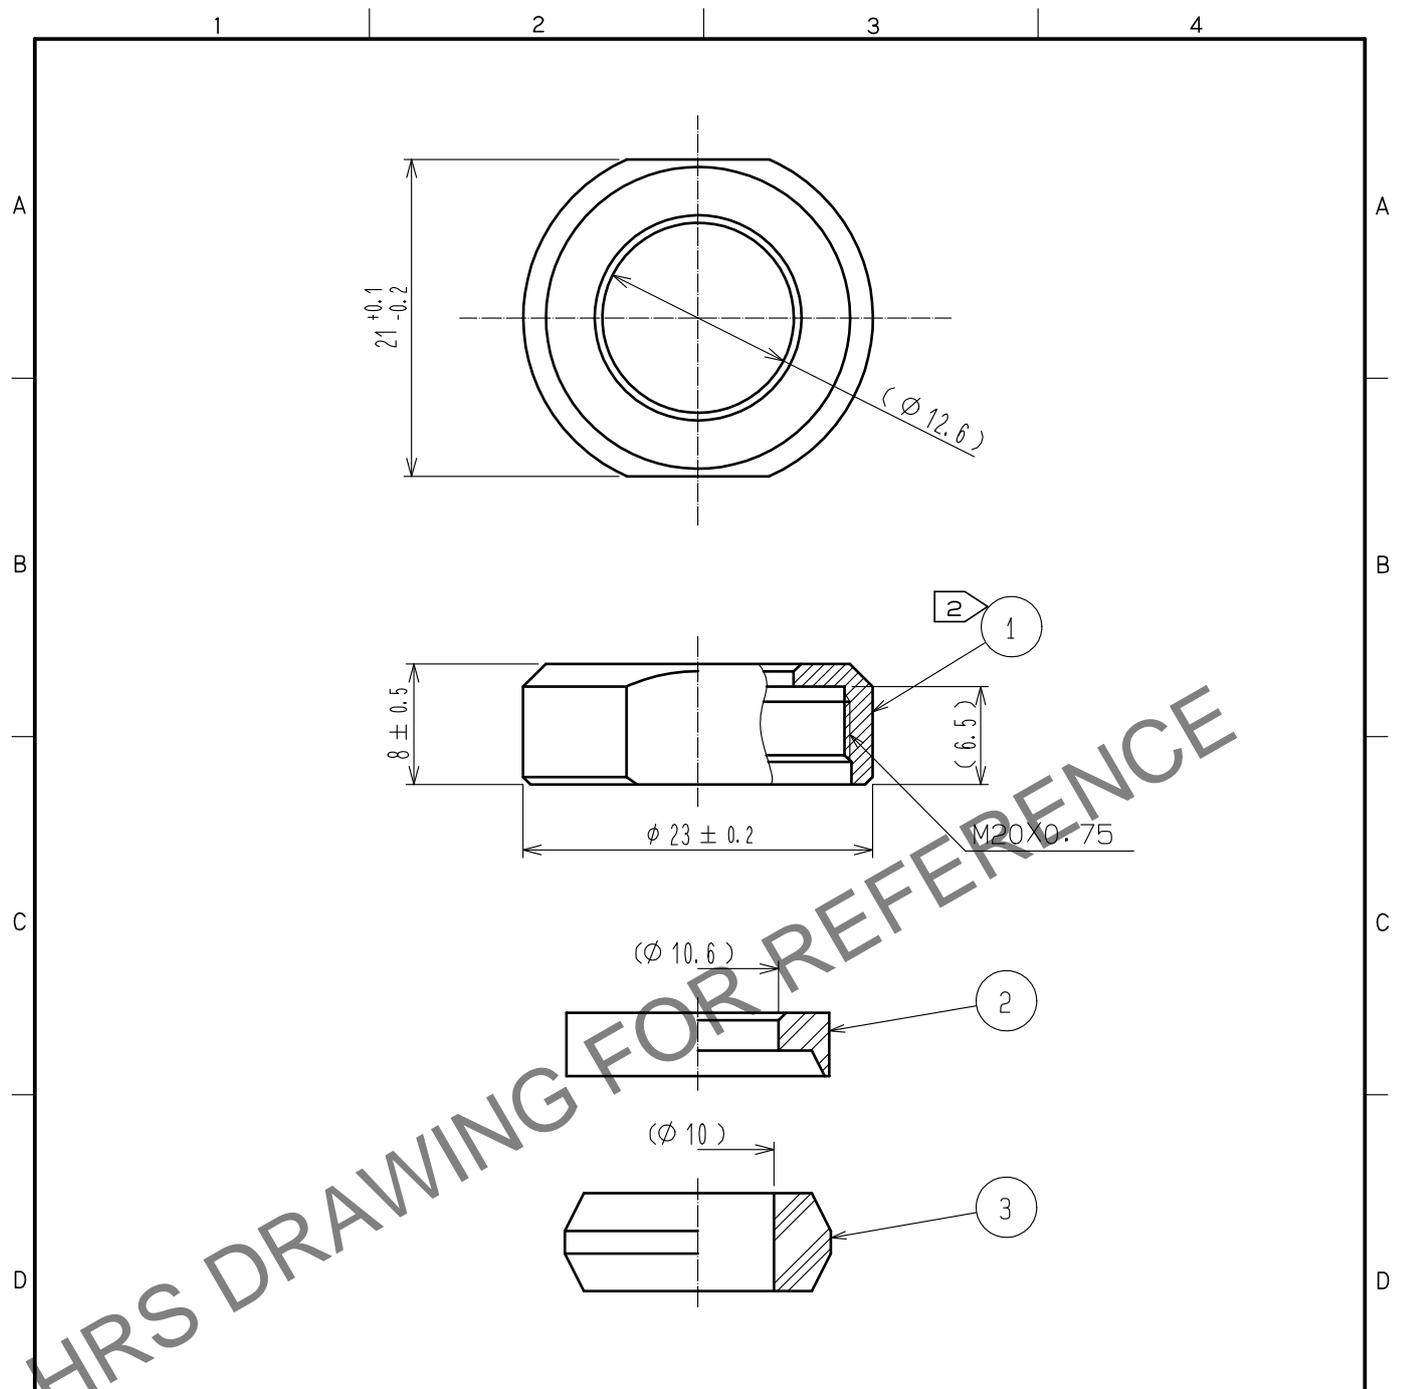

- Notes
- 1 This product is delivered disassembled.
  - 2 The recommended clamp torque of REF. No. ① to be 3 to 3.5N·m  
 Loctite 263, HENKEL JAPAN or equivalent is recommended  
 to prevent REF. No. ① from loosening.
  - 3 The cable pull and twisting strength and other characteristics  
 may differ, depending on the cable structure.  
 Please confirm before the use.

| 2                               | PPS      | (Black) UL94V-0      |           |                                |                  |
|---------------------------------|----------|----------------------|-----------|--------------------------------|------------------|
| 1                               | Brass    | Black chrome plating | 3         | Acrylonitrile butadiene rubber | (Gray)           |
| NO.                             | MATERIAL | FINISH . REMARKS     | NO.       | MATERIAL                       | FINISH . REMARKS |
| UNITS<br>mm                     |          | SCALE<br>2 : 1       | COUNT<br> | DESCRIPTION OF REVISIONS       | DESIGNED         |
|                                 |          |                      |           |                                | CHECKED          |
|                                 |          |                      |           |                                | DATE             |
| HIROSE<br>ELECTRIC<br>CO., LTD. | APPROVED | ·HY. KOBAYASHI       | 15.08.27  | DRAWING NO.                    | EDC-110489-71-00 |
|                                 | CHECKED  | ·HY. KOBAYASHI       | 15.08.27  | PART NO.                       | JR16WCCA-10(71)  |
|                                 | DESIGNED | ·HY. KISHI           | 15.08.27  | CODE NO.                       | CL114-2079-2-71  |
|                                 | DRAWN    | ·HY. KISHI           | 15.08.27  |                                |                  |