


Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1			2			3			4					
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△					△				
△					△					△				
△					△					△				

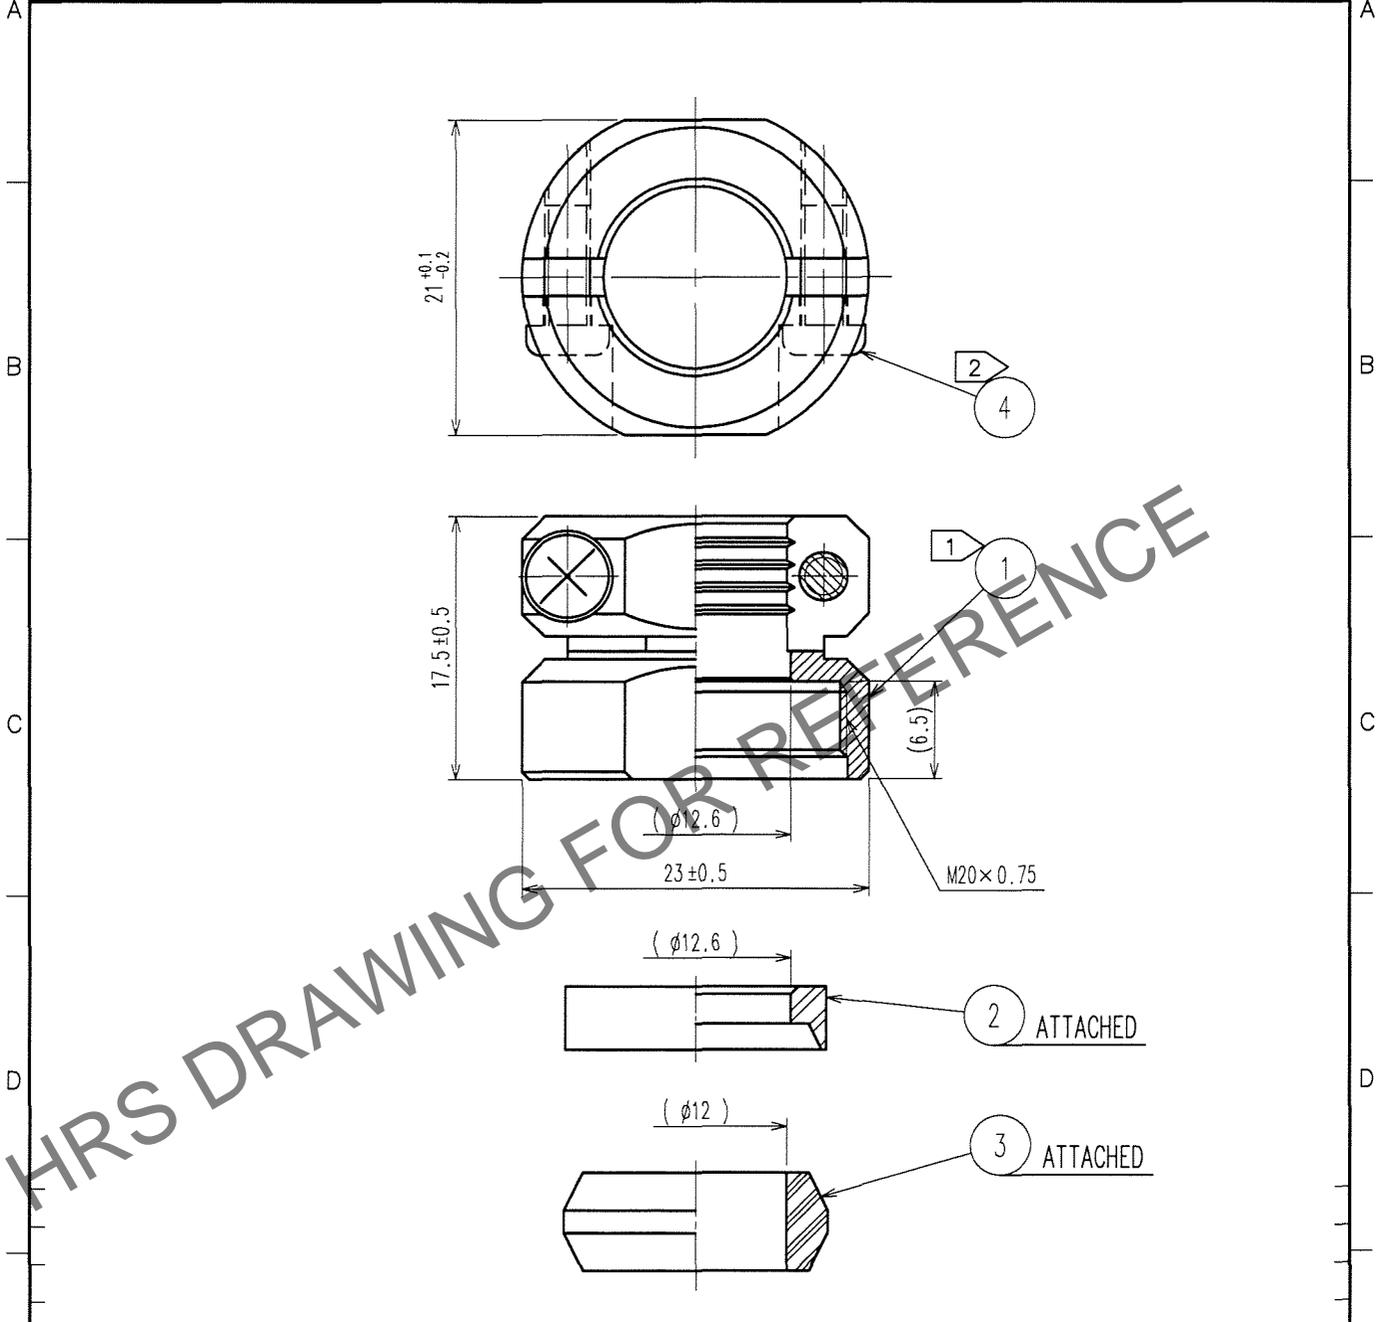

NOTES ① THE RECOMMENDED CLAMP TORQUE OF REF.NO. ①: 3 TO 3.5N · m
LOCTITE 271, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
REF. NO. ① FROM LOSSENING.
② THE RECOMMENDED CLAMP TORQUE OF REF. NO. ④: 0.65 TO 0.7N · m

2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	4	STAINLESS STEEL	M3×0.5×8
1	BRASS	BLACK CHROME PLATING	3	ACRYLONITRILE BUTADIENE RUBBER	(GLAY)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN <i>M. Sato</i> 06.12.27	DESIGNED <i>D. Matsume</i> 06.12.27	CHECKED <i>Y. Yamada</i> 06.12.27	APPROVED <i>M. Sato</i> 06.12.27	RELEASED
----------------------	-------------------------------------	---	---	--	----------

SCALE 2 : 1	DRAWING NO. EDC4-110462-71	PART NO. JR16WCC-12(71)
UNITS mm	HRS HIROSE ELECTRIC CO., LTD.	CODE NO. CL114-2056-7-71

TO
R