


Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE				
△								△											
△								△											
△								△											

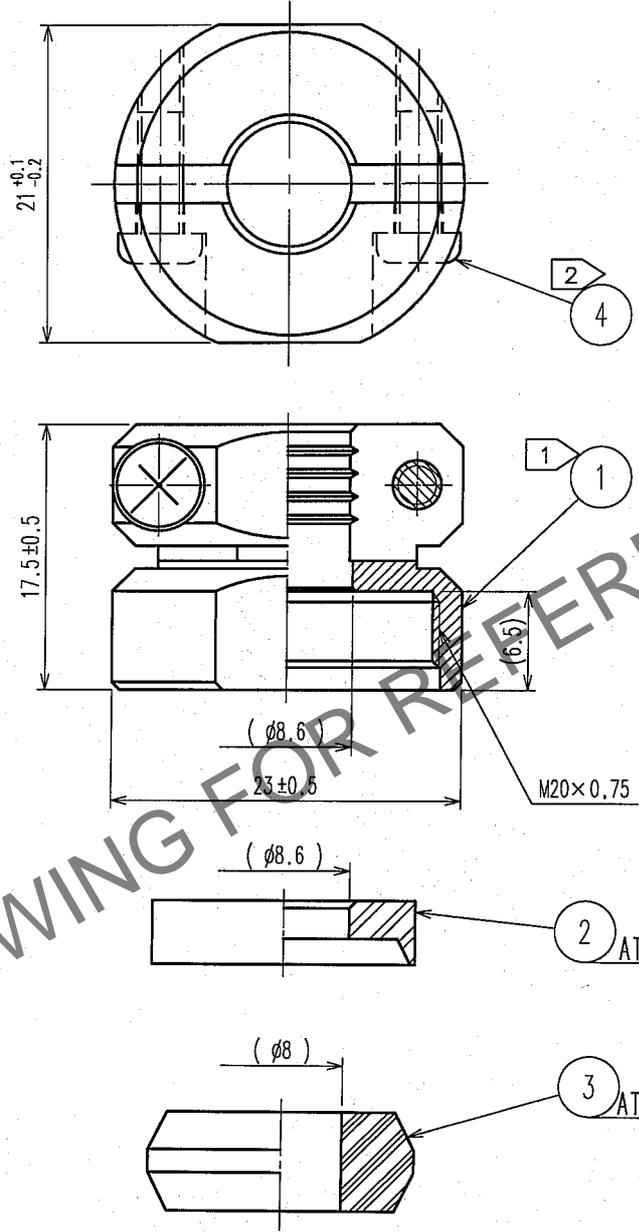

- ① THE RECOMMENDED CLAMP TRQUE OF REF. ① TO BE 3 TO 3.5 N · m  
LOCTITE 271, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDND TO PREVENT  
REF, NO. ① FROM LOOSENING.
- ② THE RECOMMENDED CLAMP TRQUE OF REF. ② TO BE 0.65 TO 0.7 N · m

2	PPS	(BLACK) UL94V-0	4	STAINLESS STEEL	M3x0.5x8
1	BRASS	BLACK CHROME PLATING	3	NBR	(GRAY)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	J. Nori	H. Nagano	E. Kunii	M. Sato	
	05.12.20	05.12.20	05.12.20	05.12.21	

 SCALE 2 : 1 UNITS mm	DRAWING NO. EDC4-110602-71	PART NO. JR16WCC-8(71)
	 HIROSE ELECTRIC CO., LTD.	CODE NO. CL114-2054-1-71

In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.