


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

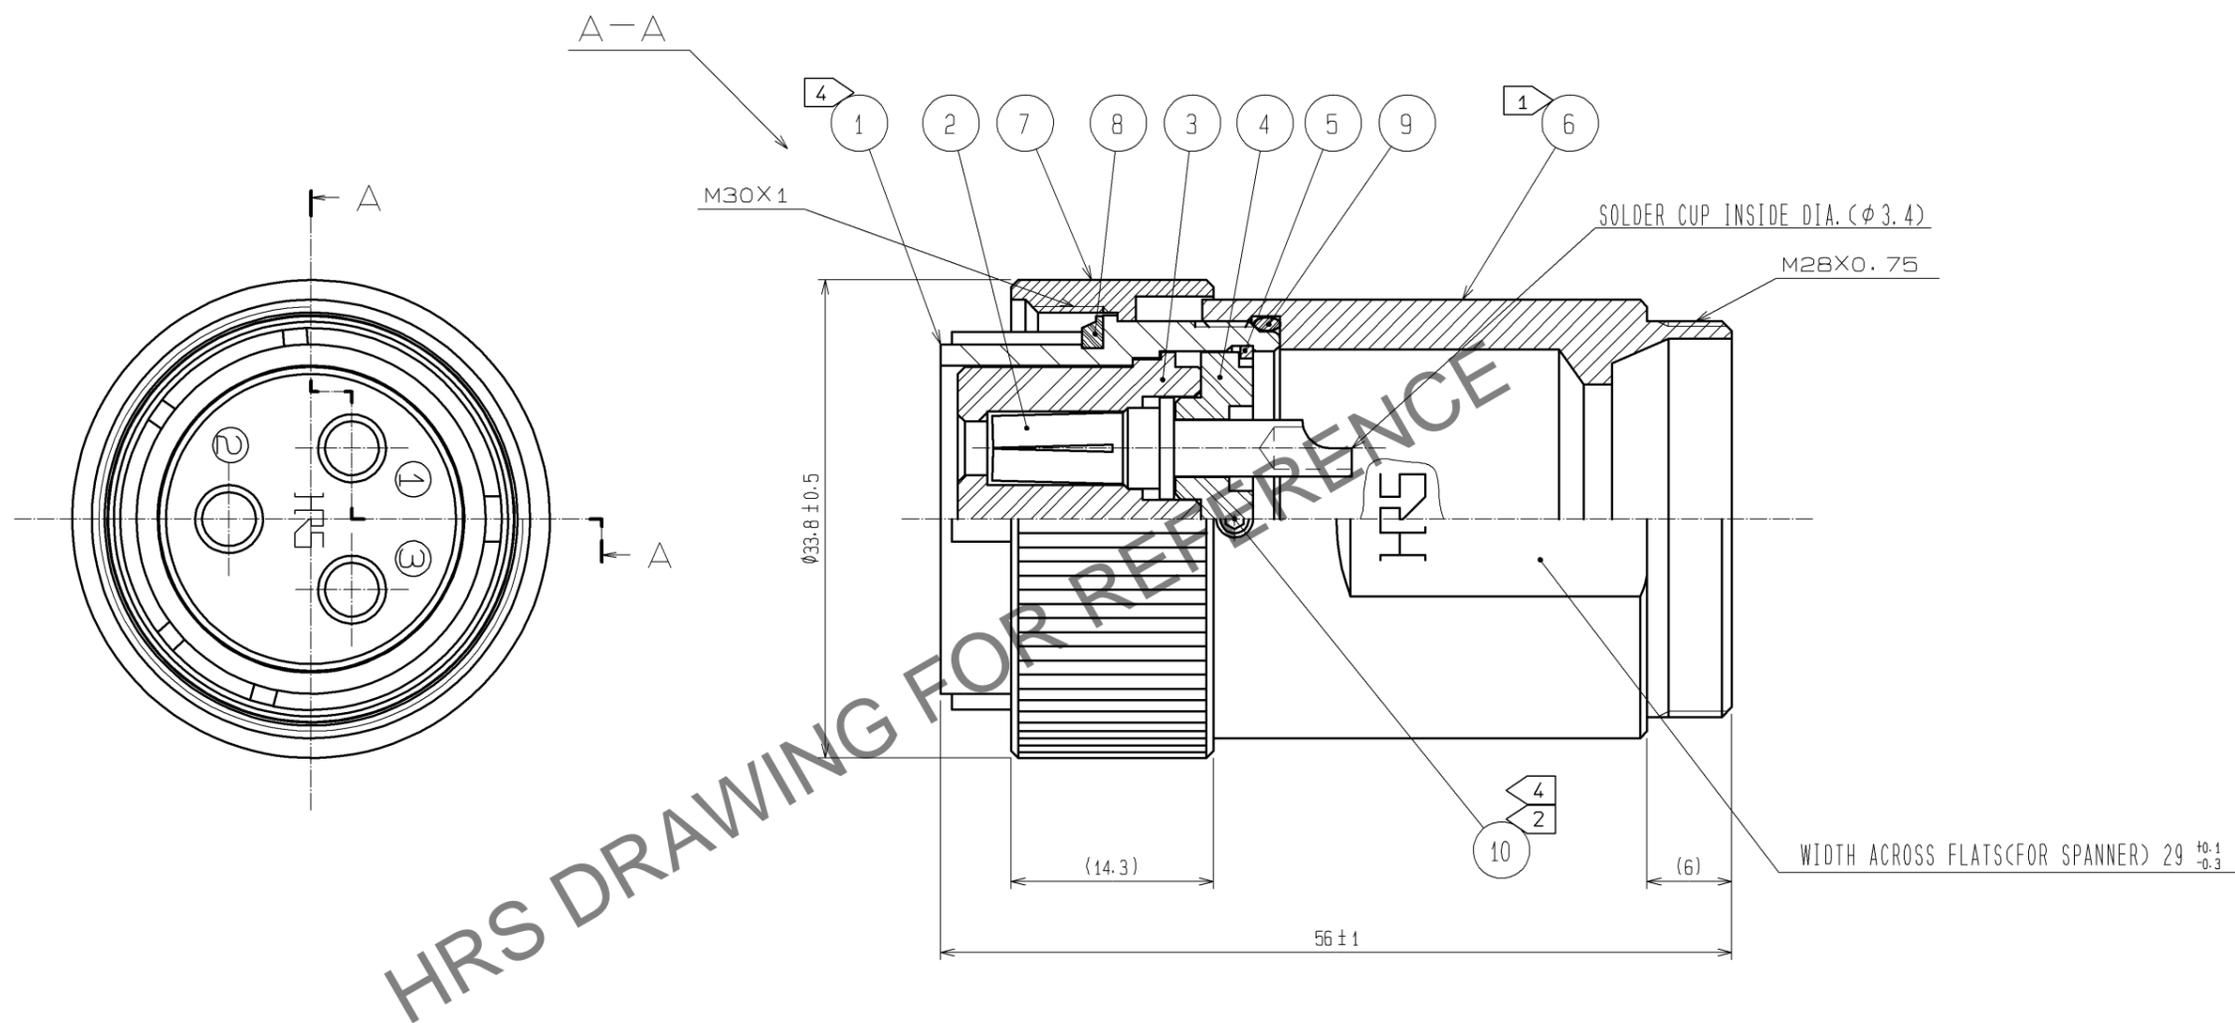

- NOTES
- ① THE RECOMMENDED CLAMP TORQUE REF. NO. ⑥ : 5 TO 5.5 N · m.
  - ② THE RECOMMENDED CLAMP TORQUE REF. NO. ⑩ : 0.3 TO 0.4 N · m.
  - ③ POSITIONAL RELATIONSHIP IN ROTATIONAL DIRECTION BETWEEN REF. NO. ① AND ⑥ SHOWS AN EXAMPLE.
  - ④ LOCTITE 271, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ① AND NO. ⑥ FROM LOOSENING.
  - ⑤ ROTATIONAL DIRECTION OF THE SOLDER CUP OF REF. NO. ② SHOWS AN EXAMPLE.
  - ⑥ THIS PRODUCT TO BE USED WITH CABLECLAMP, JR25WCC-\*(71).  
 \*\* DESIGNATE DIAMETER OF APPLICABLE.
  - ⑦ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER. DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	
4	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	9	SILICONE RUBBER	(BLACK)
3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	8	SILICONE RUBBER	(BLACK)
2	PHOSPHOR BRONZE	SILVER PLATING 2μm min.	7	BRASS	BLACK CHROME PLATING
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : HY. KISHI			11.03.10	DRAWING NO. EDC3-112113-71		
CHECKED : HY. KISHI			11.03.10	PART NO. JR25WP-3S(71)		
DESIGNED : WR. AJIRO			11.03.10	CODE NO. CL114-2159-0-71		
DRAWN : WR. AJIRO			11.03.10	1/1		