
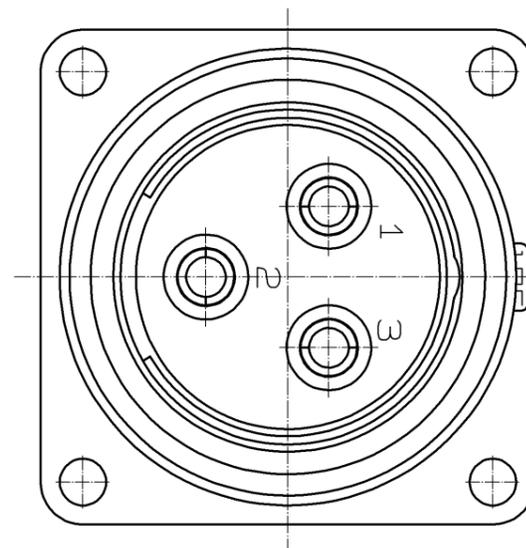
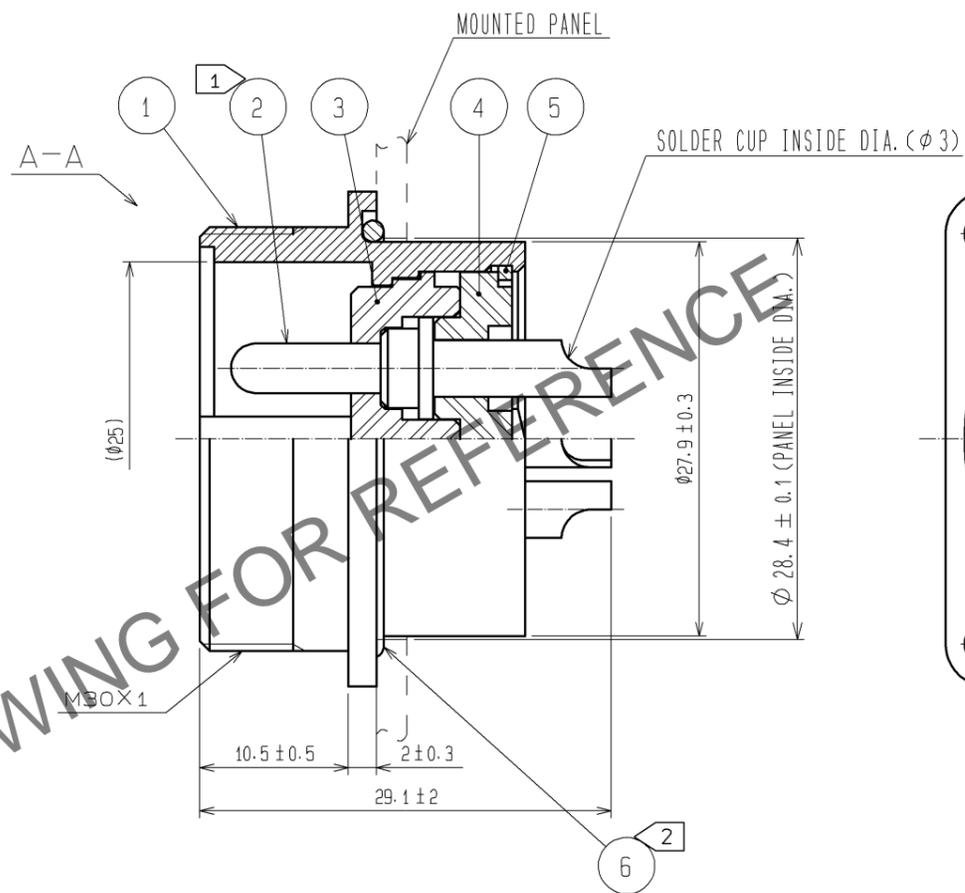


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

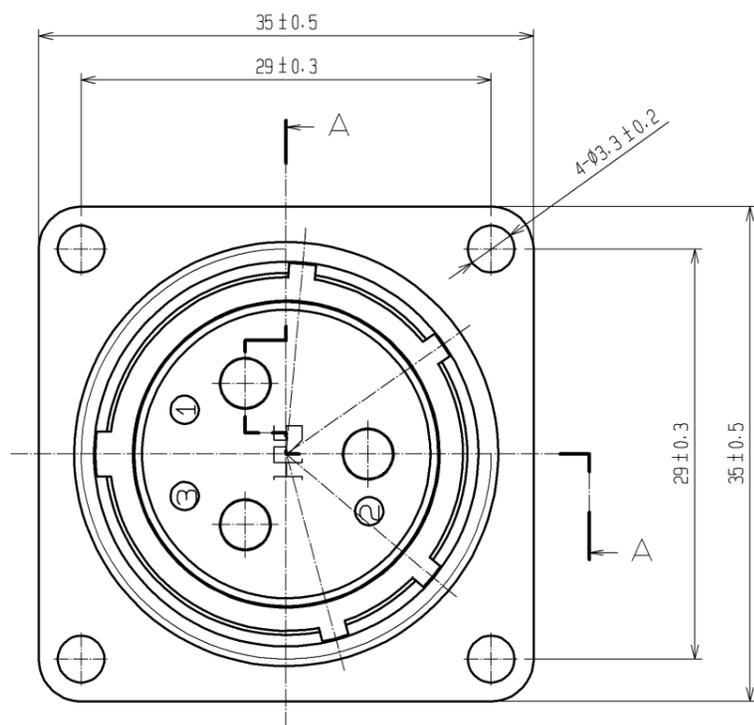

HRS DRAWING FOR REFERENCE

- NOTES
- ① ROTATIONAL DIRECTION OF THE SOLDER CUP OF REF. NO. ② SHOWS AN EXAMPLE.
 - ② MAKE SURE THAT REF. NO. ⑥ DOES NOT HAVE ANY FACTORS TO REDUCE WATER-RESISTANCY, SUCH AS SCRACH, TWIST, PINGHING, OR DUST.

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
3	POLYPHENYLENE SULFIDE	(BLACK)	UL94V-0	6	SILICONE RUBBER	(BLACK)	
2	BRASS	SILVER PLATING	2μm min.	5	PHOSPHOR BRONZE	NICKEL PLATING	
1	ALUMINUM ALLOY	BLACK CHROME PLATING		4	POLYPHENYLENE SULFIDE	(BLACK)	UL94V-0

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
HIROSE ELECTRIC CO., LTD.			APPROVED : HY. KISHI 11.03.10 CHECKED : HY. KISHI 11.03.10 DESIGNED : WR. AJIRO 11.03.10 DRAWN : WR. AJIRO 11.03.10	DRAWING NO. EDC3-112112-71 PART NO. JR25WR-3P(71) CODE NO. CL114-2158-7-71		