


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

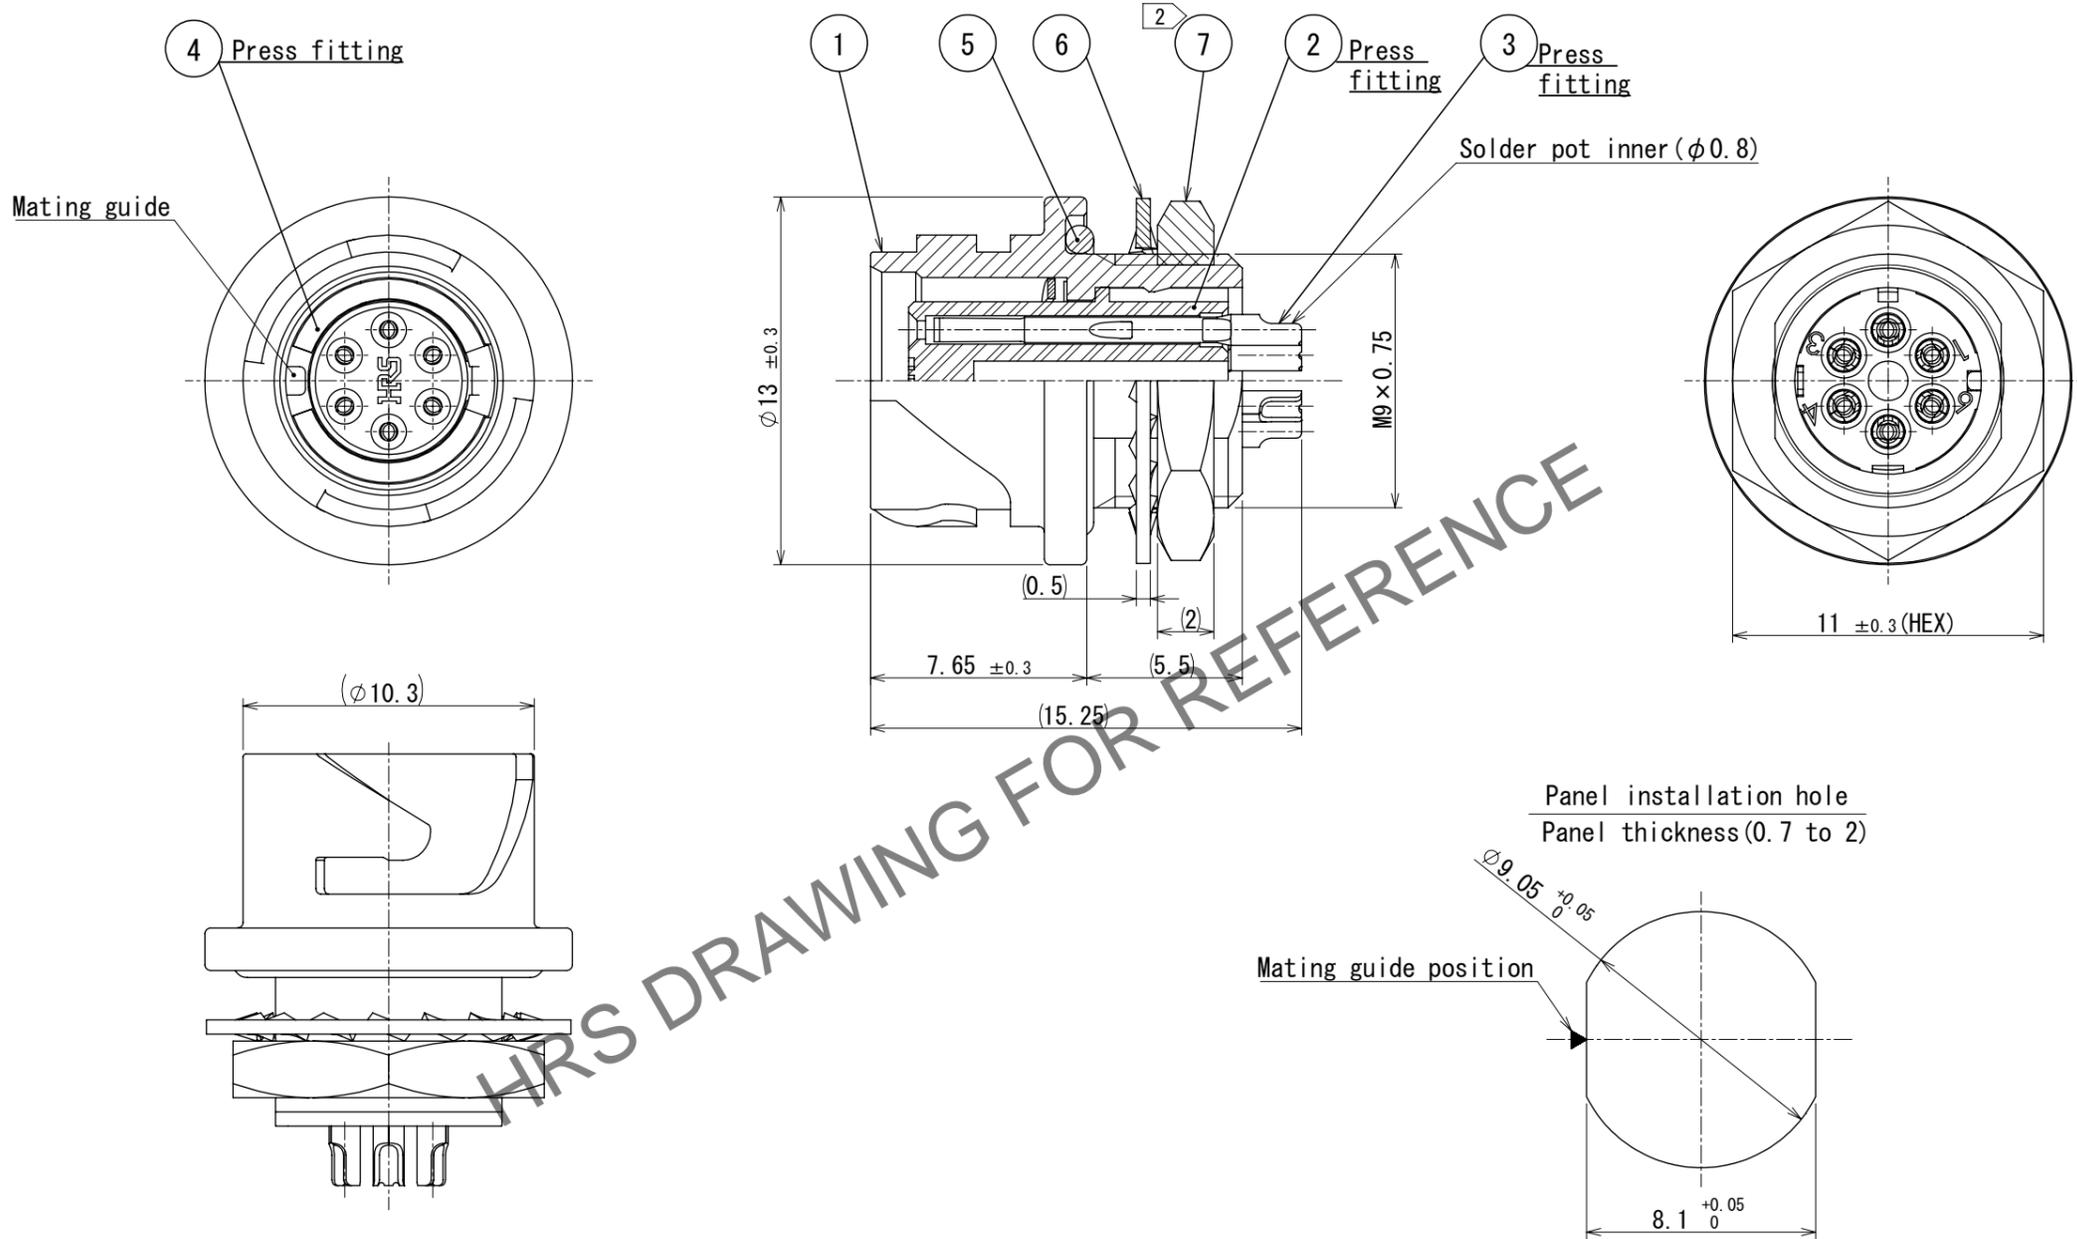

- Notes
- ① Plating (Ref. No. ③)
 Contact area : gold 0.2 μm min.
 Others : gold and nickel
 Under plating: nichel 2 μm min.
 - ② The recommend clamp torque of Ref. No. ⑦ to be 1.5 to 2 N·m.
 Thread locker to the threaded portion of Ref. No. ① apply to prevent Ref. No. ⑦ from loosening.
 Recommended thread locker : Loctite 263, Henkel Japan Ltd.
 - ③ When this connector is mounted on to panel, be careful Ref. No. ⑤ is assembled surely into the groove of Ref. No. ① as shown in this figure to keep waterproof effectiveness.

△ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
4	Phosphor bronze	Nickel plating		7	Steel	Nickel plating	
3	Phosphor bronze	①		6	Steel	Nickel plating	
2	Polyphenylene sulfide	(Black) UL94V-0		5	Chloroprene rubber	(Black)	
1	Zinc alloy	Nickel plating					

UNITS mm		SCALE 4:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00018125	DESIGNED Y.J. KOGA	CHECKED HY. KOBAYASHI	DATE 2024. 11. 01
APPROVED : MR. YOSHIDA 2005. 01. 05				DRAWING NO. EDC-113851-00-00			
CHECKED : MO. SATOH 2005. 01. 05				PART NO. LF07WBR-6S			
DESIGNED : YH. YAMADA 2005. 01. 05				CODE NO. CL0136-1002-0-00			
DRAWN : YH. YAMADA 2005. 01. 05				② 1/1			