

⑥ Fig. 2(1:1)




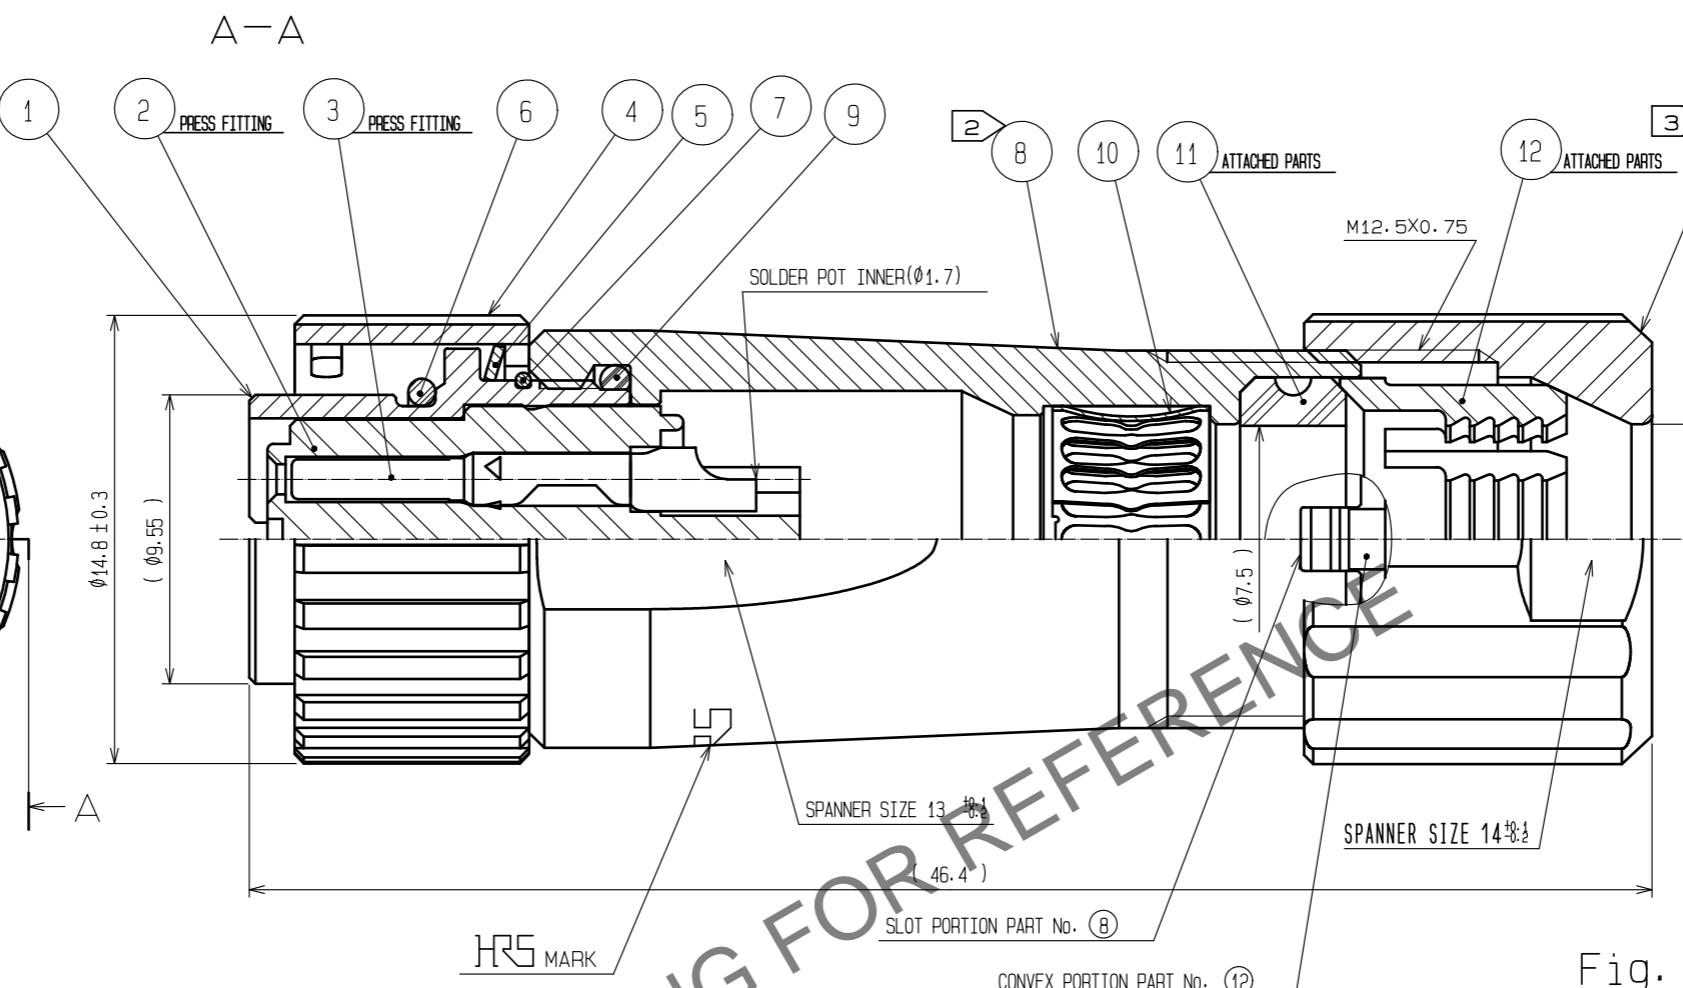


Fig. 1(2:1)

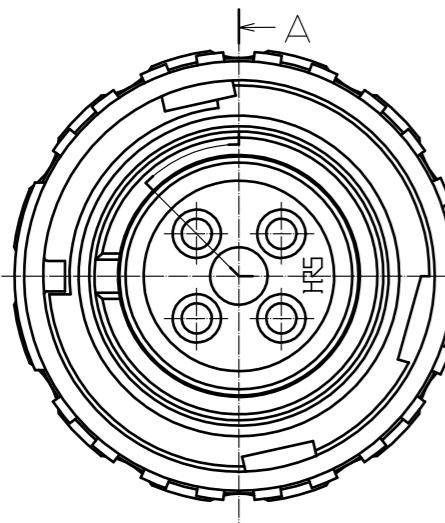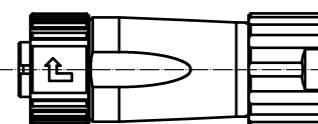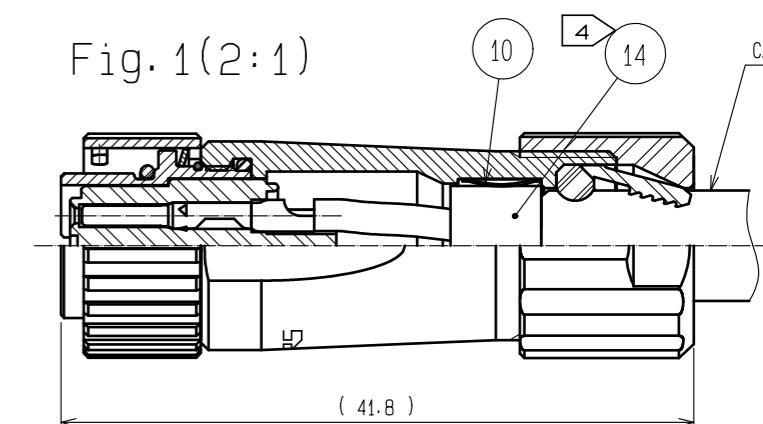

NOTES ① PLATING(REF.NO.③)

CONTACT AREA : GOLD 0.2μm min

OTHERS : GOLD OR NICKEL

UNDER PLATING : NICKEL 2μm min

② THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑧ TO BE 1 TO 1.5N·m.

THREAD LOCKER TO THE THREADED PORTION OF REF.NO.① APPLIES TO PREVENT REF.NO.⑧ FROM LOOSING.

RECOMMENDED THREAD LOCKER : LOCTITE 263, HENKEL JAPAN LTD.

③ THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑬ TO BE 0.8 TO 1N·m.

THREAD LOCKER AND LOCK PRIMER TO THE THREADED PORTION M12.5X0.75 OF REF.NO.⑧ APPLIES TO PREVENT REF.NO.⑬ FROM LOOSING.

RECOMMENDED THREAD LOCKER AND LOCK PRIMER : LOCTITE 263, LOCK PRIMER 7649, HENKEL JAPAN LTD.

④ FASTEN REF.NO.⑭ TO THE CABLE WITH THE CABLE CRIMPING TOOL.

AND MAKE REF.NO.⑭ CONTACT WITH REF.NO.⑩(REFER TO Fig.1).

REFER TO THE TECHNICAL SPECIFICATION ETAD-C0099 FOR DETAILS.

APPLICABLE CABLE CRIMPING TOOL : LF-TC-01 (CL150-0234-6)

⑤ APPLICABLE CABLE ASSEMBLY FIXTURE : LF10BP-T01 (CL150-0235-9)

CABLE ASSEMBLY FIXTURE IS USED AS A RECEPTACLE STAND OF EXTRACT AND THE PART NUMBER ① OF AN ASSEMBLY.

⑥ Fig.2 SHOWS THE APPEARANCE AFTER ASSEMBLY.

⑦ ROTATION EXAMPLES OF REF.④, ⑧ AND ⑬ TO ① ARE SHOWN.

⑧ CABLE PULL FORCE, TWISTING STRENGTH, WATER TIGHTNESS AND OTHER CHARACTERISTICS MAY DIFFER DEPENDING ON CABLE SPECIFICATIONS AND STRUCTURE.

PLEASE EVALUATE UNDER THE ACTUAL CONDITIONS PRIOR TO USE.

⑨ THIS PRODUCT MAY BE STAINED DUE TO LUBRICANT.

HOWEVER, THIS DOES NOT AFFECT THE PRODUCT PERFORMANCE, SO PLEASE USE IT AS IT IS.

NO.	MATERIAL	FINISH.	REMARKS	NO.	MATERIAL	FINISH.	REMARKS
7	STAINLESS STEEL			14	BRASS		NICKEL PLATING
6	SILICONE RUBBER	(BLACK)		13	PPS	(NATURAL, BROWN)	UL94V-0
5	STAINLESS STEEL			12	POLYAMIDE	(NATURAL, MILKY WHITE)	UL94V-0
4	ZINC ALLOY	BLACK CHROME PLATING		11	SILICONE RUBBER	(BLACK)	
3	COPPER ALLOY	①		10	PHOSPHOR BRONZE		NICKEL PLATING
2	PPS	(BLACK)	UL94V-0	9	SILICONE RUBBER	(BLACK)	
1	ZINC ALLOY	BLACK CHROME PLATING		8	ZINC ALLOY		BLACK CHROME PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	4 : 1	⑥ 3	DIS-C-00017016	HT. ZENBA	EJ. KUNII	20240311
			APPROVED : MO. SATOH 20090114	DRAWING NO.	EDC3-114240-03	
			CHECKED : HY. KOBAYASHI 20090114	PART NO.	LF10WBP-4S(03)	
			DESIGNED : TY. SUZUKI 20090113	CODE NO.	CL0136-0005-2-03	
			DRAWN : TY. SUZUKI 20090113			

HRS
HIROSE
ELECTRIC
CO., LTD.