


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

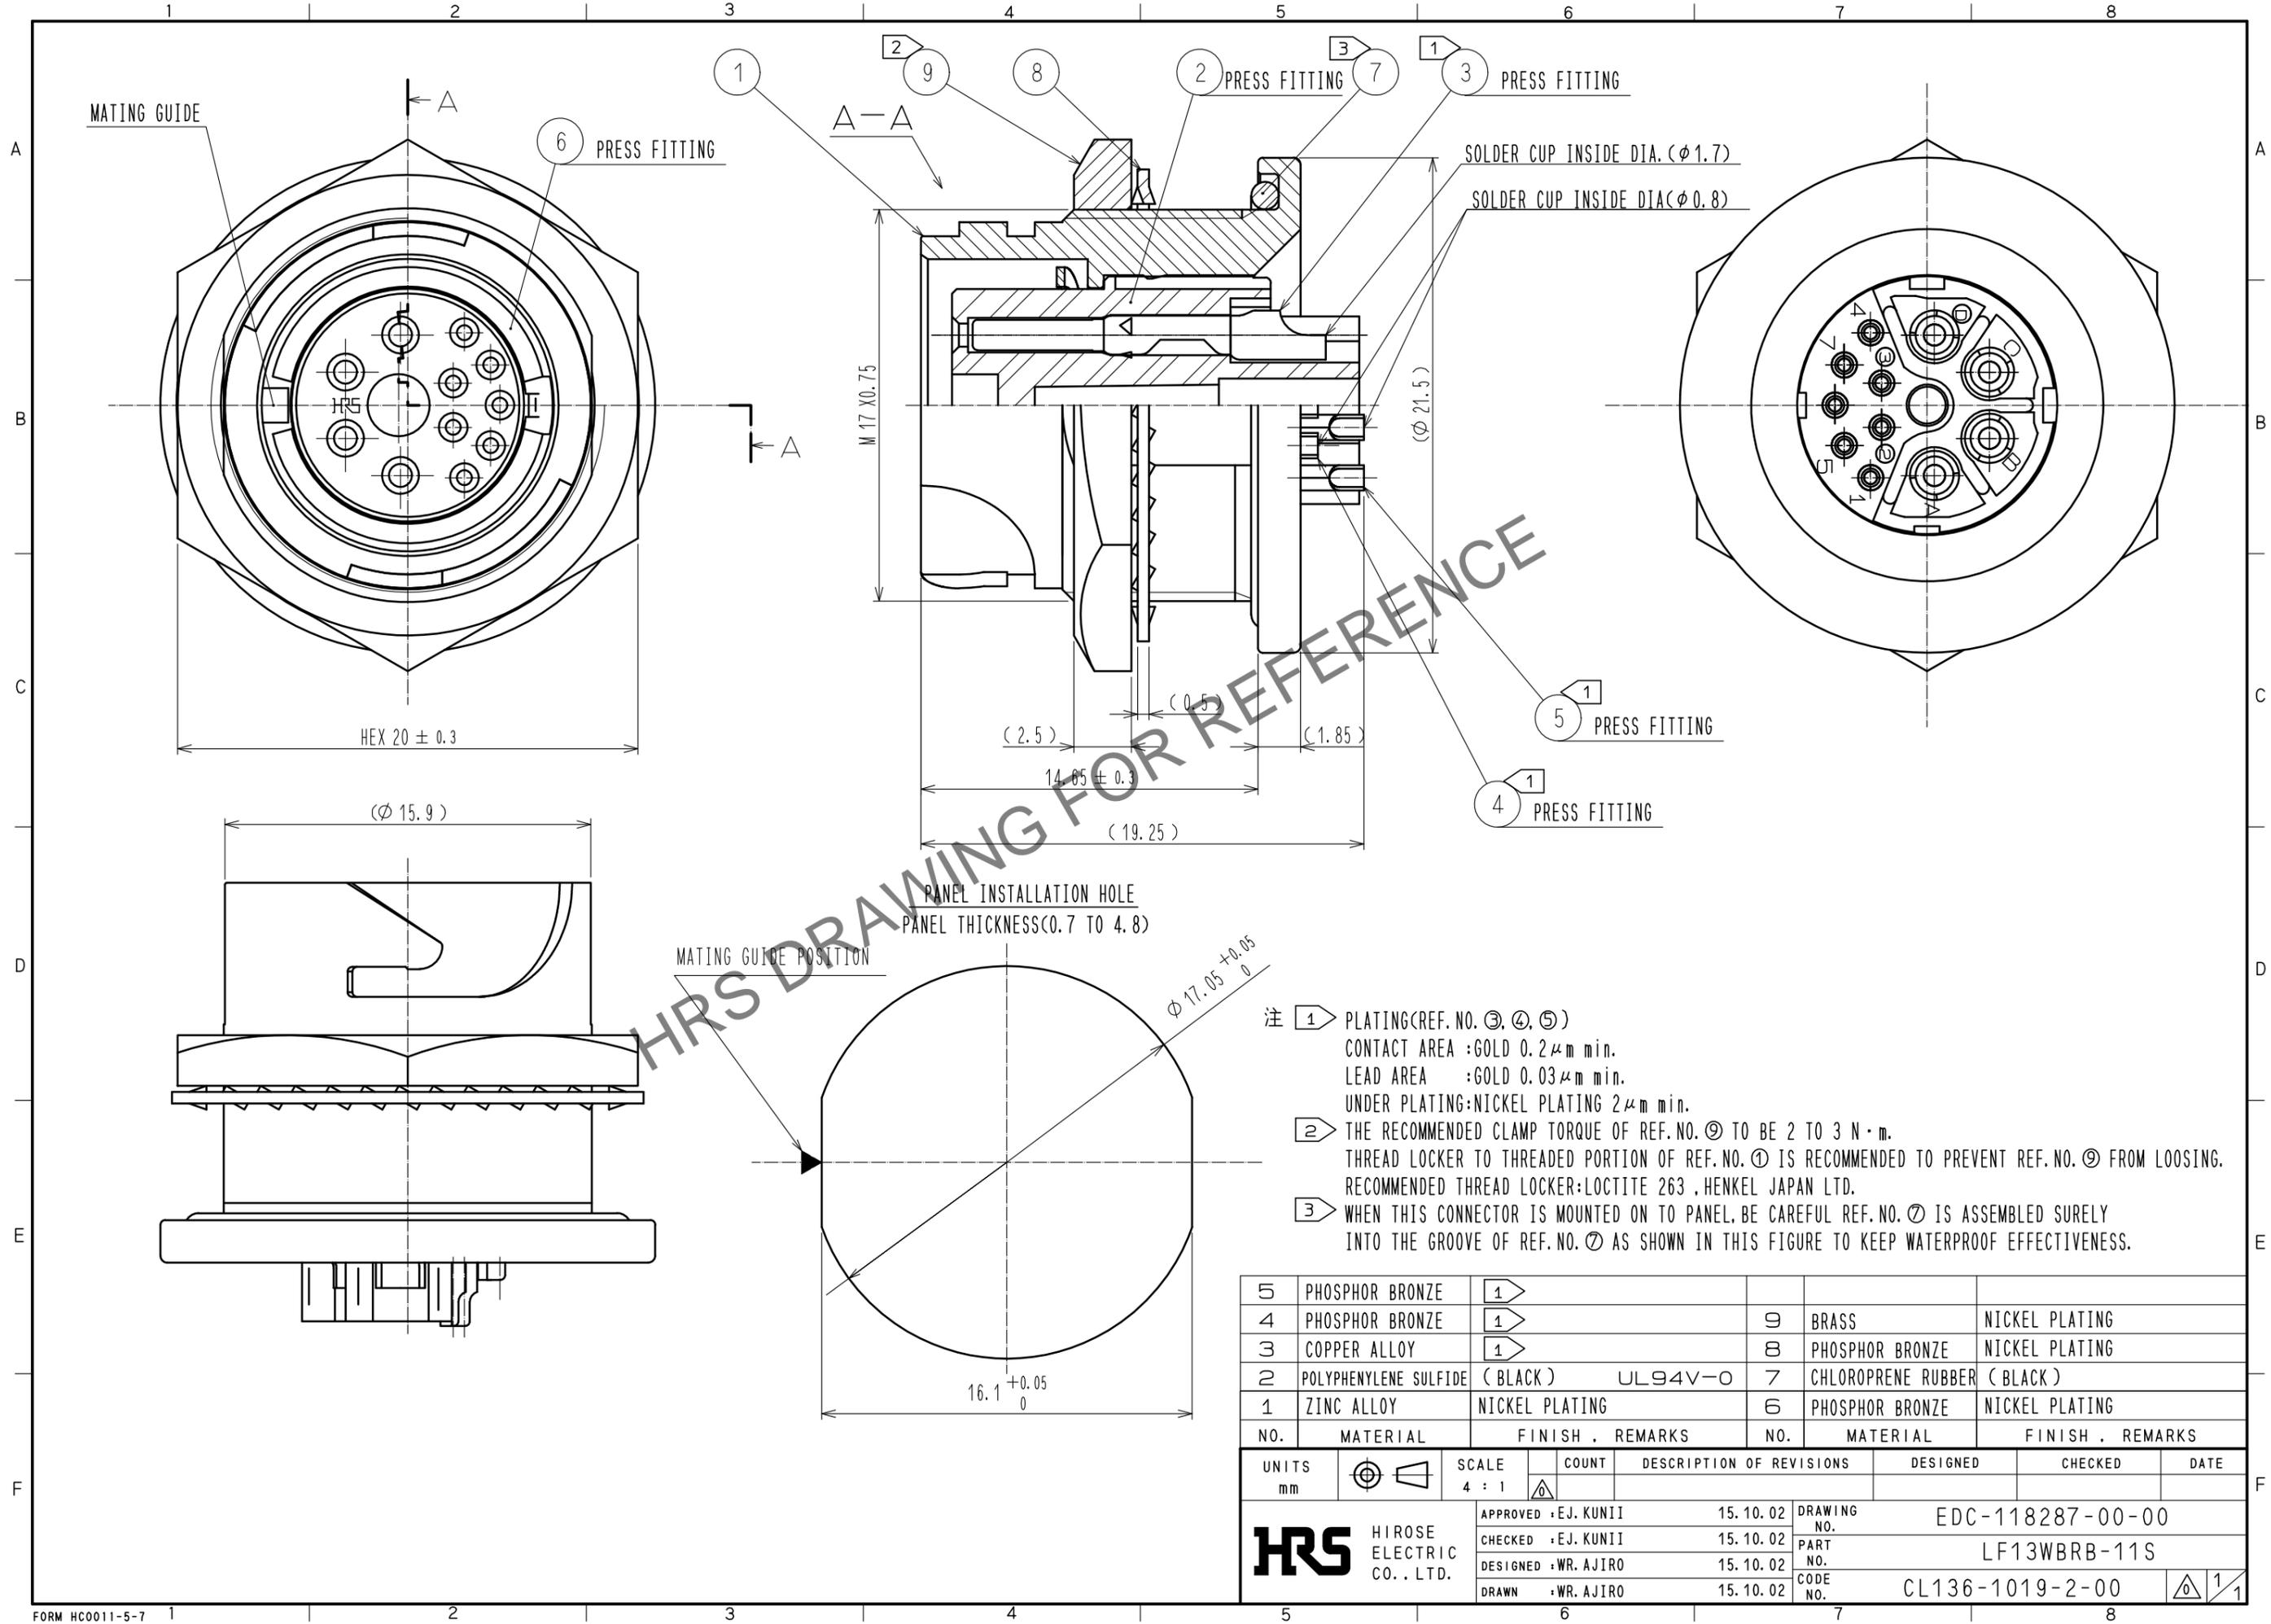

- 注 ① PLATING(REF. NO. ③, ④, ⑤)
 CONTACT AREA :GOLD 0.2μm min.
 LEAD AREA :GOLD 0.03μm min.
 UNDER PLATING:NICKEL PLATING 2μm min.
- ② THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑨ TO BE 2 TO 3 N · m.
 THREAD LOCKER TO THREADED PORTION OF REF. NO. ① IS RECOMMENDED TO PREVENT REF. NO. ⑨ FROM LOOSING.
 RECOMMENDED THREAD LOCKER:LOCTITE 263 ,HENKEL JAPAN LTD.
- ③ WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL, BE CAREFUL REF. NO. ⑦ IS ASSEMBLED SURELY INTO THE GROOVE OF REF. NO. ⑦ AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.

5	PHOSPHOR BRONZE	①			
4	PHOSPHOR BRONZE	①	9	BRASS	NICKEL PLATING
3	COPPER ALLOY	①	8	PHOSPHOR BRONZE	NICKEL PLATING
2	POLYPHENYLENE SULFIDE (BLACK)	UL94V-0	7	CHLOROPRENE RUBBER (BLACK)	
1	ZINC ALLOY	NICKEL PLATING	6	PHOSPHOR BRONZE	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 4 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.				APPROVED :EJ. KUNII 15.10.02 CHECKED :EJ. KUNII 15.10.02 DESIGNED :WR. AJIRO 15.10.02 DRAWN :WR. AJIRO 15.10.02	DRAWING NO. EDC-118287-00-00 PART NO. LF13WBRB-11S CODE NO. CL136-1019-2-00		