


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

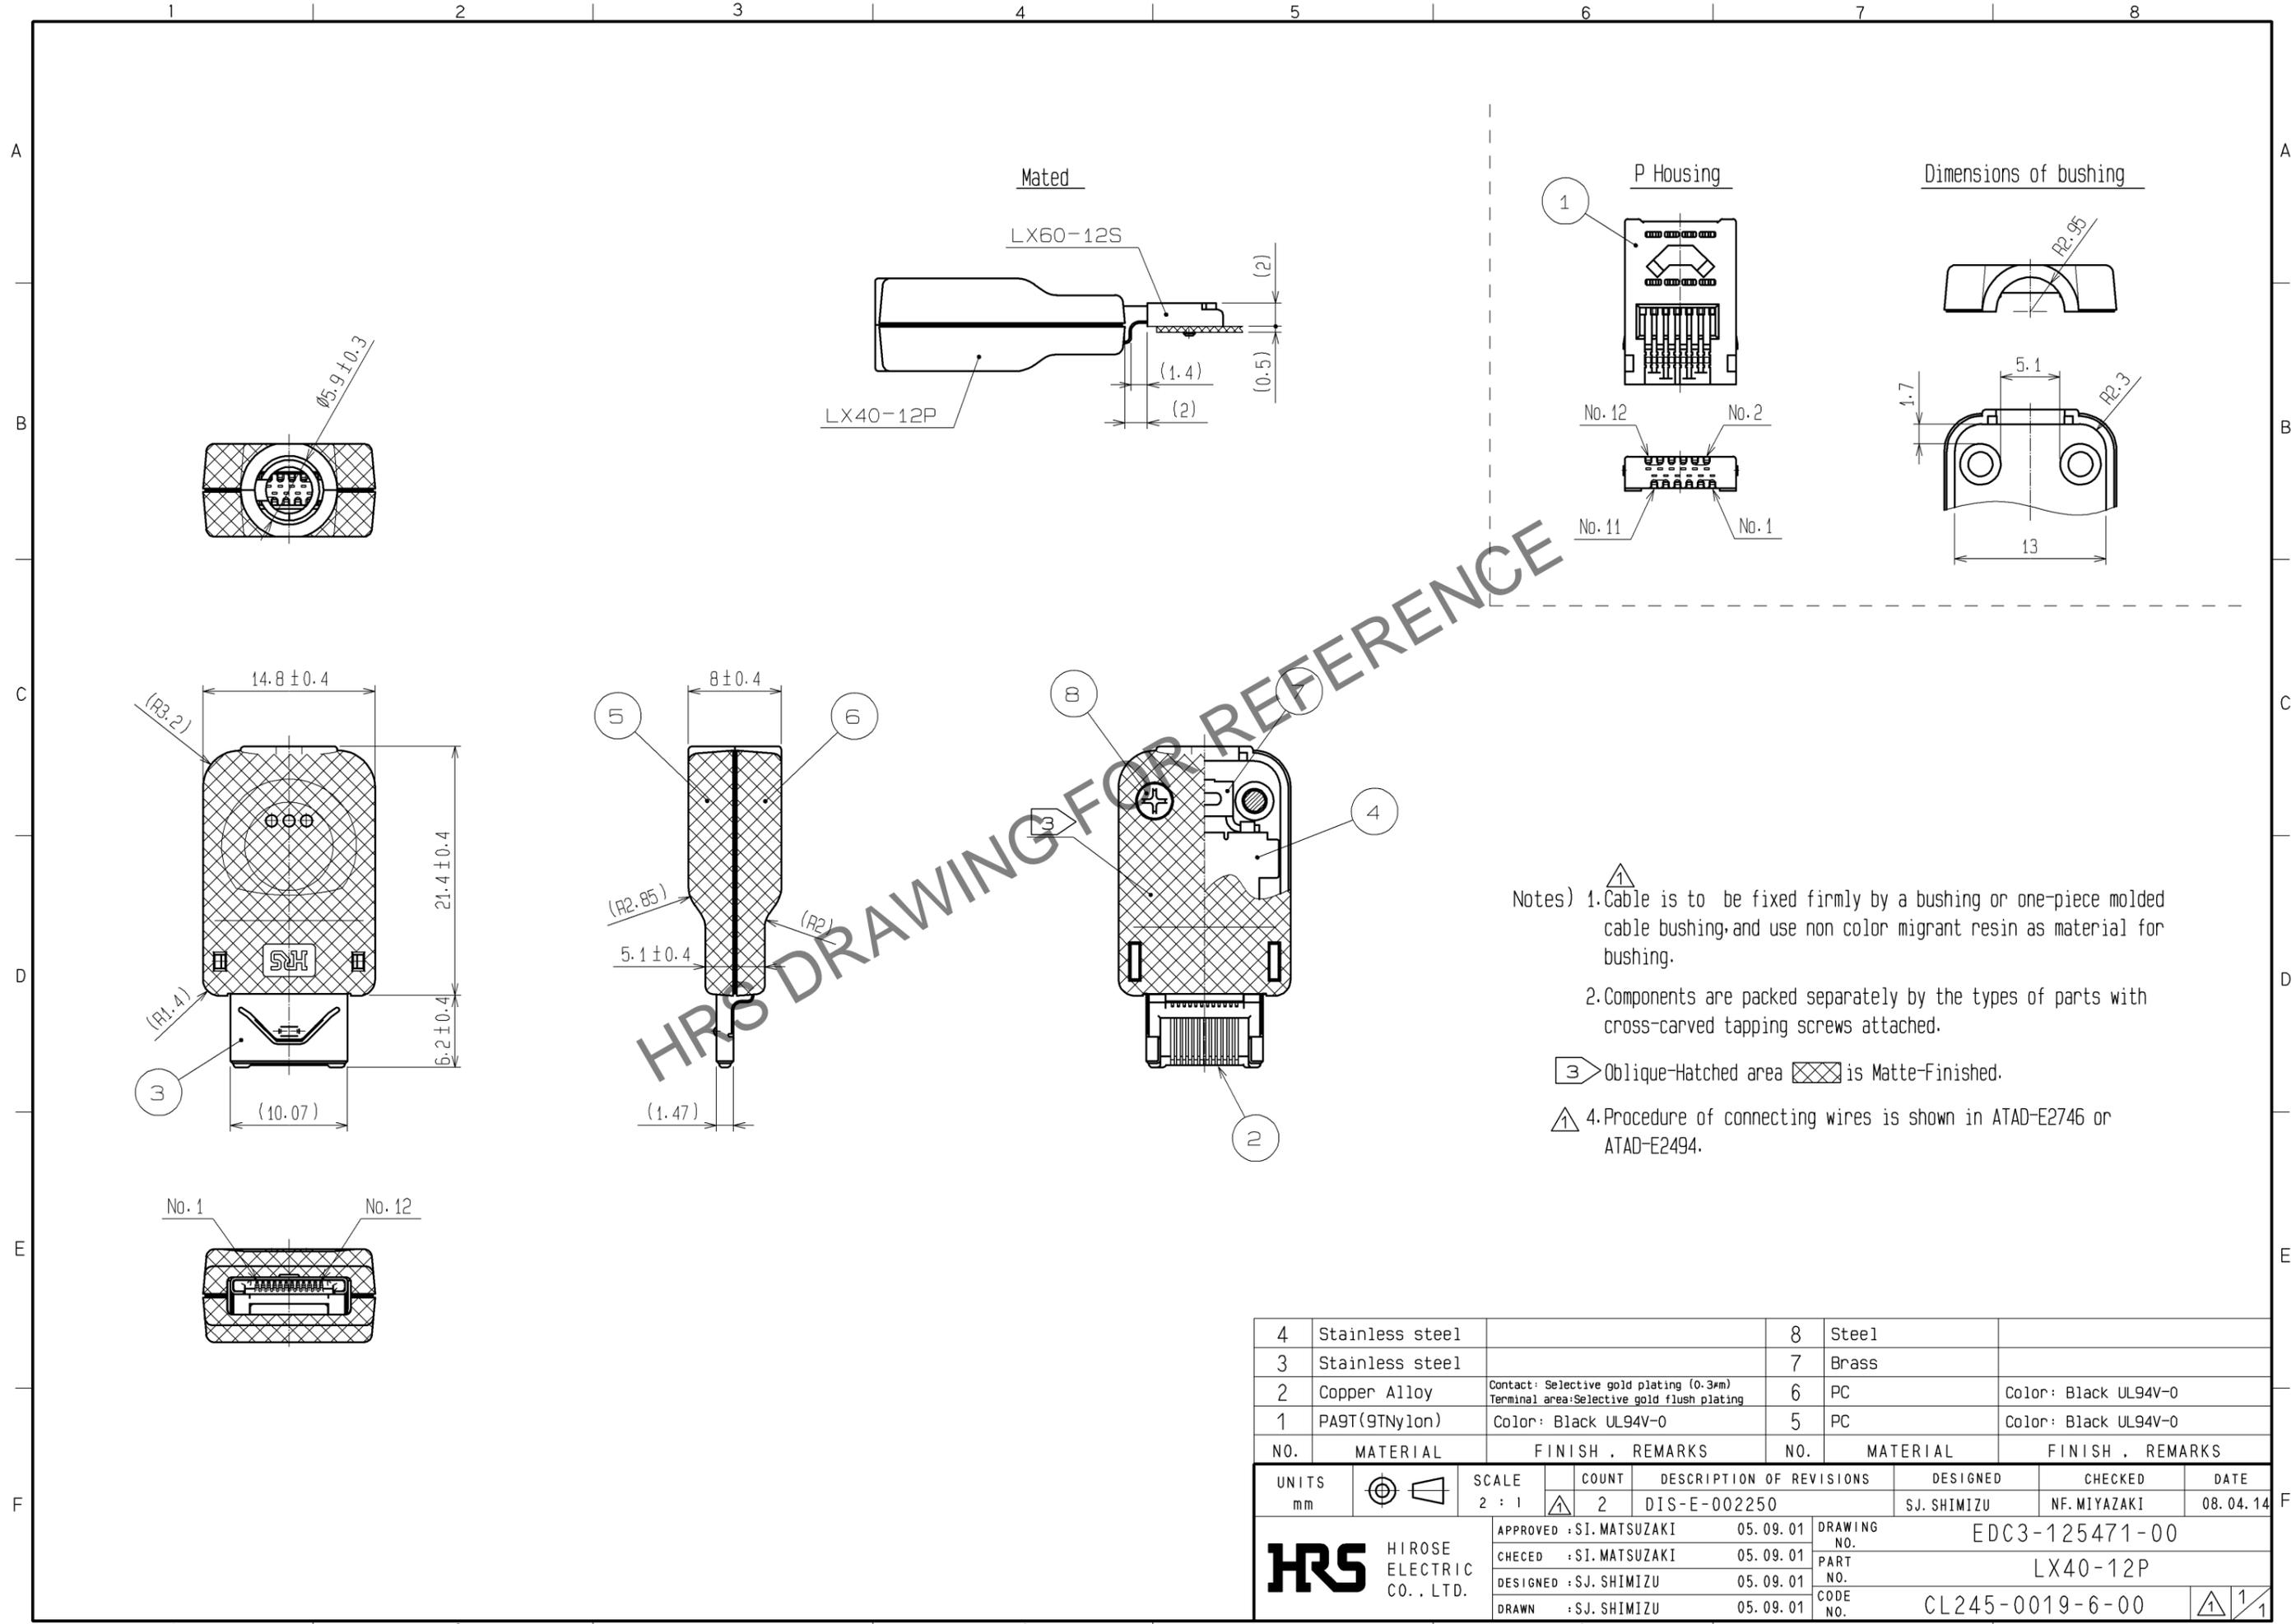

Notes) 1. Cable is to be fixed firmly by a bushing or one-piece molded cable bushing, and use non color migrant resin as material for bushing.  
 2. Components are packed separately by the types of parts with cross-carved tapping screws attached.  
 3 Oblique-Hatched area is Matte-Finished.  
 4. Procedure of connecting wires is shown in ATAD-E2746 or ATAD-E2494.

4	Stainless steel		8	Steel	
3	Stainless steel		7	Brass	
2	Copper Alloy	Contact: Selective gold plating (0.3μm) Terminal area: Selective gold flush plating	6	PC	Color: Black UL94V-0
1	PA9T(9TNylon)	Color: Black UL94V-0	5	PC	Color: Black UL94V-0
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		2 : 1	2	DIS-E-002250	
APPROVED : SI. MATSUZAKI		05.09.01	DRAWING NO. EDC3-125471-00		
CHECKED : SI. MATSUZAKI		05.09.01	PART NO. LX40-12P		
DESIGNED : SJ. SHIMIZU		05.09.01	CODE NO. CL245-0019-6-00		
DRAWN : SJ. SHIMIZU		05.09.01	1/1		
			DESIGNED	CHECKED	DATE
			SJ. SHIMIZU	NF. MIYAZAKI	08.04.14