
Oct.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ASSEMBLY PROCEDURE : ETAD-J0070

ASSEMBLY TOOL : FOR THE OUTER CONTACT HT303/P0-P-2-T ⚠1
FOR THE COVER UM-T-1

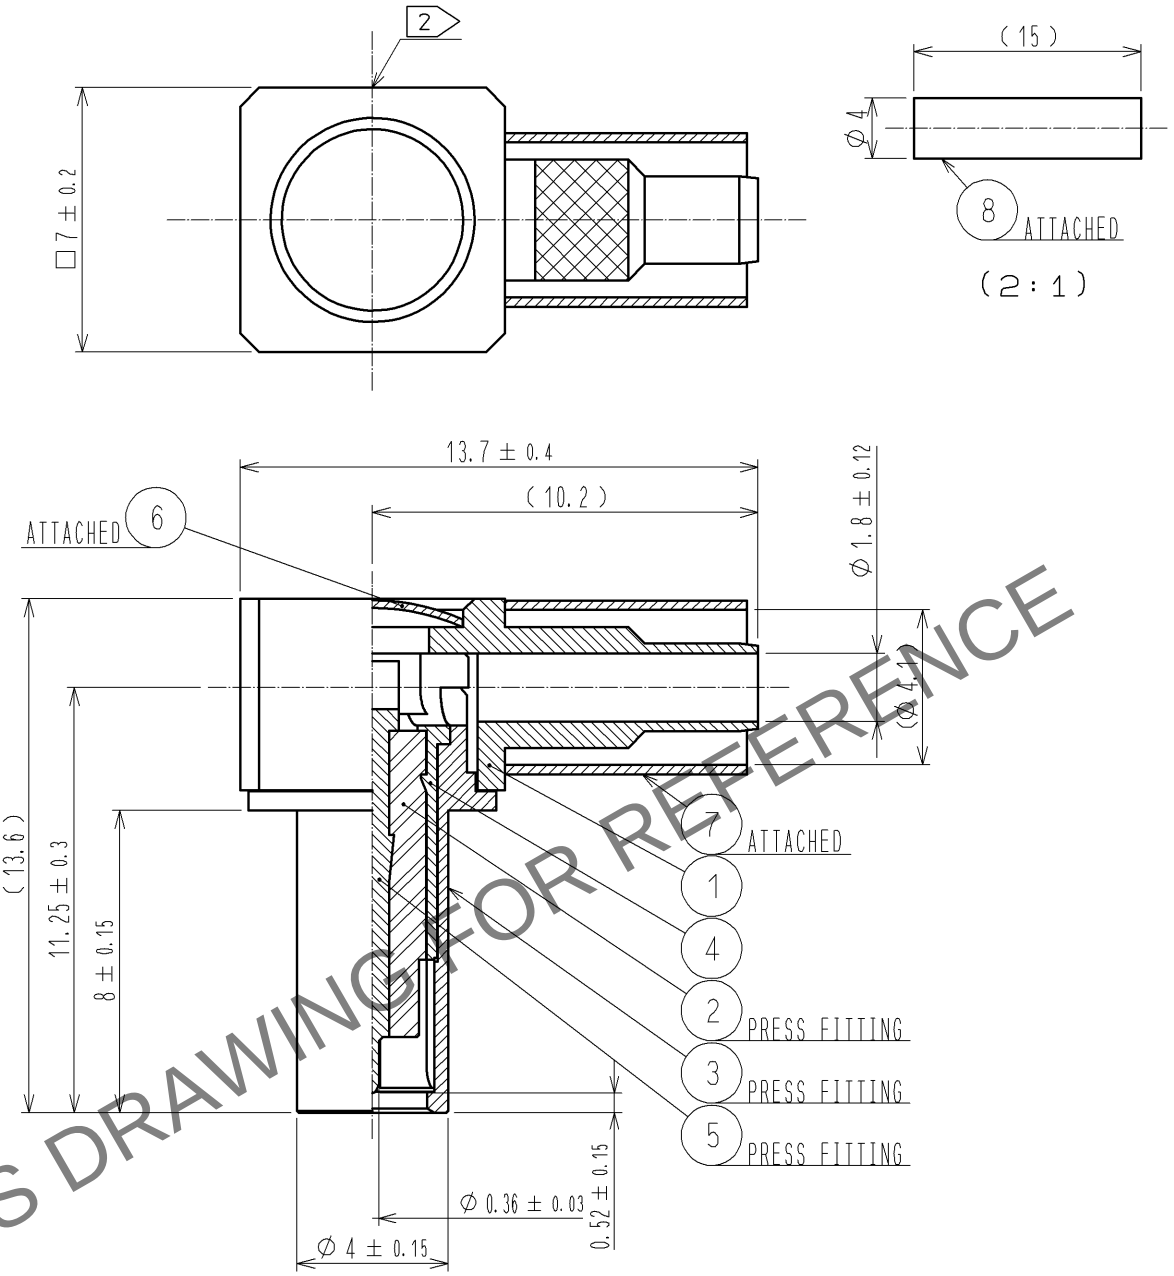

HRS DRAWING FOR REFERENCE

NOTE 1. FOR THE USE OF THIS PRODUCT, PUSH IT ON MS-162
2 MARKING HRS

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
4	PHOSHOR BRONZE	NICKEL	8	POLYOLEFIN	HEAT SHRINK TUBING
3	PHOSHOR BRONZE	NICKEL	7	COPPER	NICKEL
2	PTFE		6	BRASS	NICKEL
1	BRASS	NICKEL	5	PHOSHOR BRONZE	GOLD

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	⚠1	1	DIS-J-001288	RI. SATO	TY. OZAKI	11. 02. 07

HIROSE ELECTRIC CO., LTD.

APPROVED	KJ. KAWAMURA	05. 08. 25
CHECKED	TY. OZAKI	05. 08. 25
DESIGNED	YH. MATSUO	05. 08. 24
DRAWN	YH. MATSUO	05. 08. 24

DRAWING NO.	EDC4-180547-00
PART NO.	MS-162-C(LP)-1
CODE NO.	CL358-0222-4-00 ⚠1 1/1