

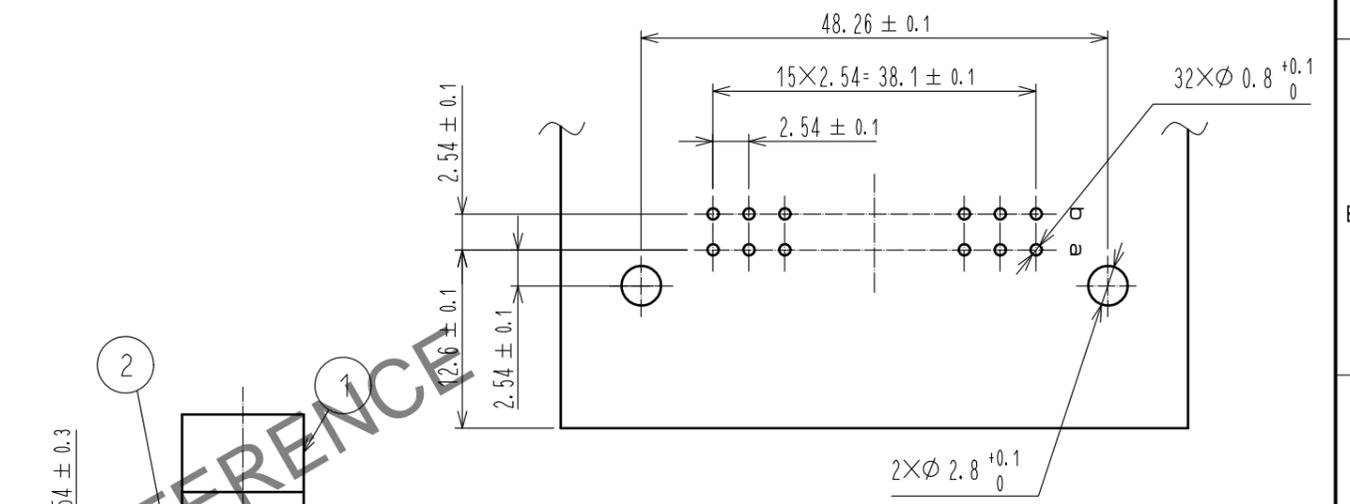
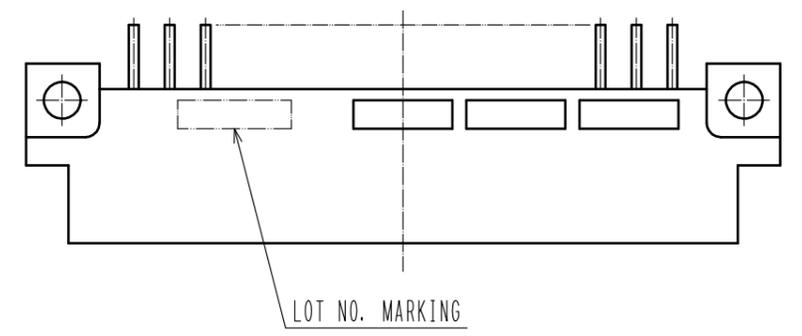
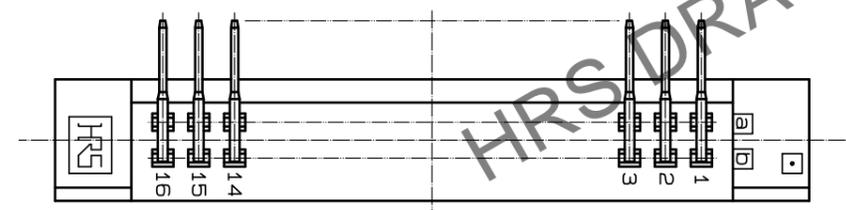
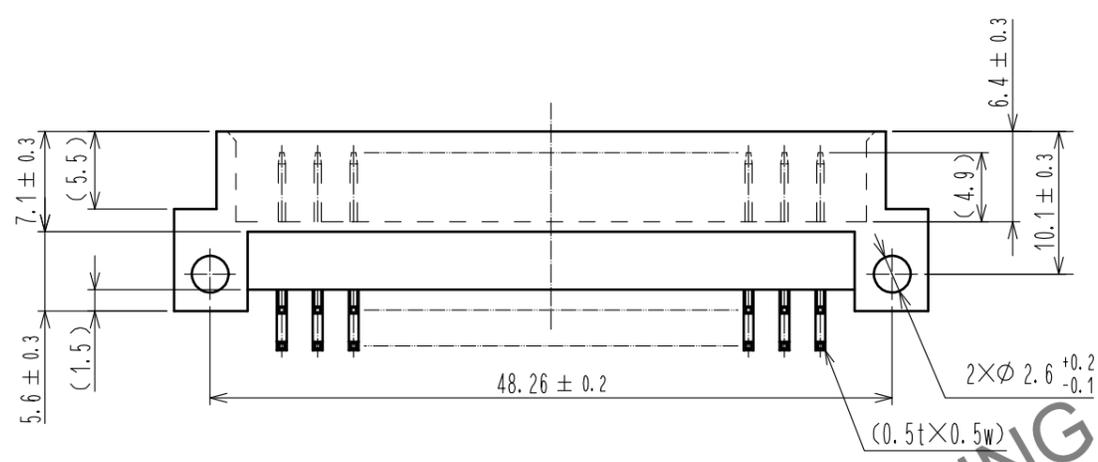


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

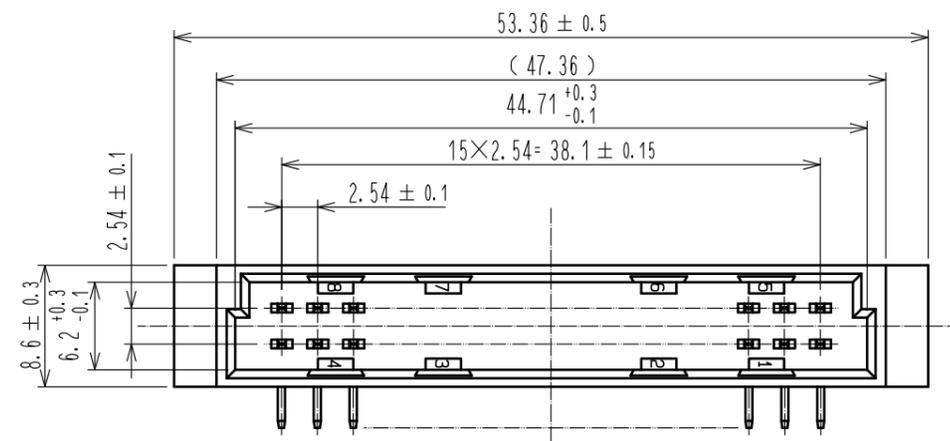

RECOMMENDED PC BOARD HOLE PATTERN (t=1.6 ± 0.1)

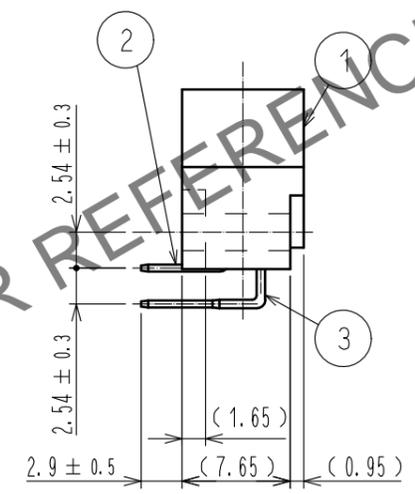

Note 1 UL (File No. E52653)

| | | | | | | | |
|---------------------------|----------|------------------------|------------|--|--|--------------------------|------------------|
| 1 | PBT | GRAY UL94V-0 | 2, 3 | BRASS | CONTACT AREA : Ni2.5 μm+Au0.2 μm DIP AREA : Ni2.5 μm+Sn2 μm | | |
| NO. | MATERIAL | FINISH . REMARKS | NO. | MATERIAL | FINISH . REMARKS | | |
| UNITS mm | | SCALE 2 : 1 | COUNT 1 | DESCRIPTION OF REVISIONS DIS-F-00017198 | DESIGNED YU. NAKADA | CHECKED HT. YAMAGUCHI | DATE 20230221 |
| | | APPROVED : KI. AKIYAMA | 20060619 | DRAWING NO. EDC-018364-72-01 | | | |
| HIROSE ELECTRIC CO., LTD. | | CHECKED : SI. TOMIOKA | 20060616 | PART NO. PCN10A-32P-2.54DS(72) | | | |
| | | DESIGNED : HM. SAITO | 20060614 | CODE NO. CL0583-0011-5-72 | | | |
| | | DRAWN : HM. SAITO | 20060614 | | | 1/1 | |