

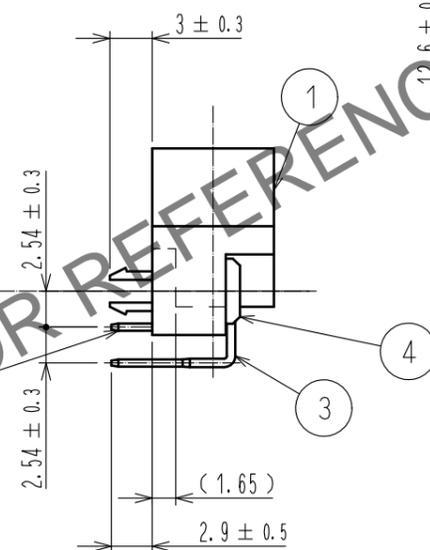
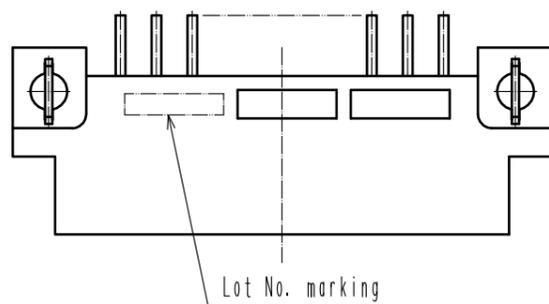
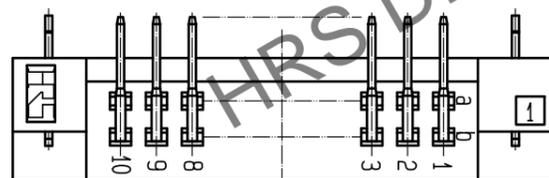
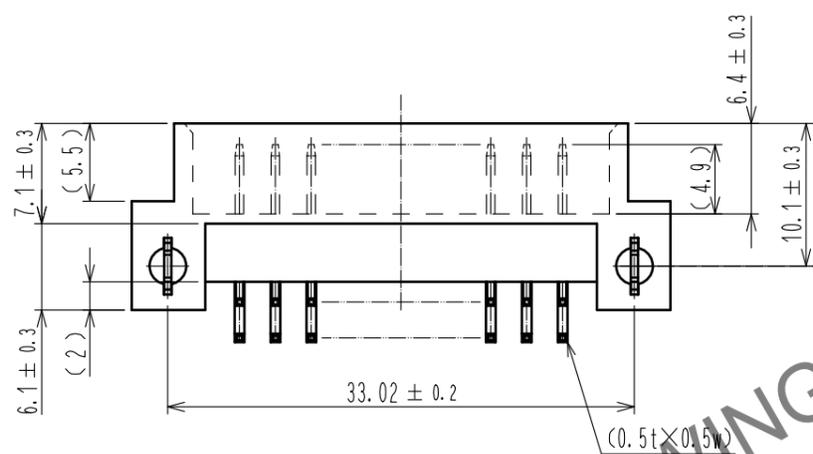


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

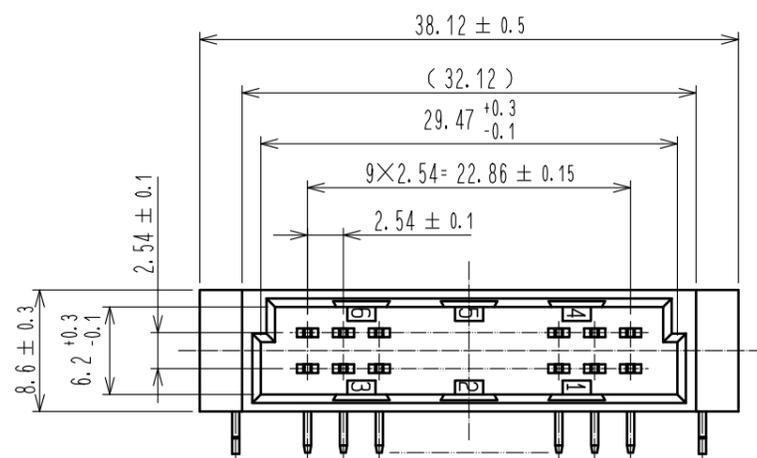

Recommended P.C.B hole pattern

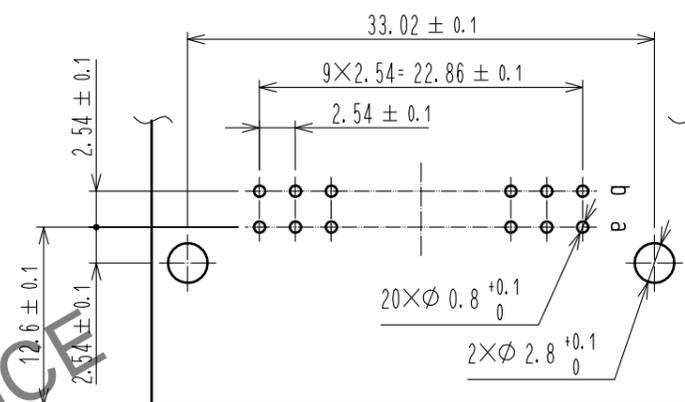

Note 1 UL(File No. E52653)



Change drawing frame format.

1	PBT	GRAY UL94V-0	4	PHOSPHOR BRONZE	Ni1 μm+Sn1 μm		
			2, 3	BRASS	CONTACT AREA : Ni2.5 μm+Au0.2 μm DIP AREA : Ni2.5 μm+Sn2 μm		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-F-00017524	DESIGNED YU. NAKADA	CHECKED HT. YAMAGUCHI	DATE 20230314
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA 20060116	DRAWING NO. EDC-019540-72-01				
		CHECKED : SI. TOMIOKA 20060114	PART NO. PCN10EA-20P-2.54DS(72)				
		DESIGNED : HT. SUGIMURA 20060113	CODE NO. CL0583-0181-5-72				
		DRAWN : HM. SAITO 20060113					