

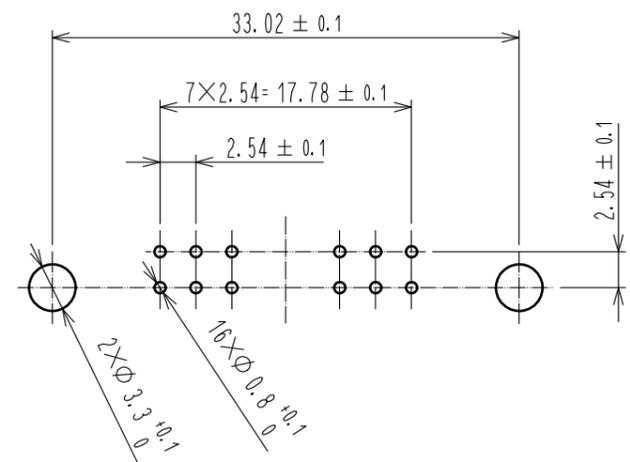
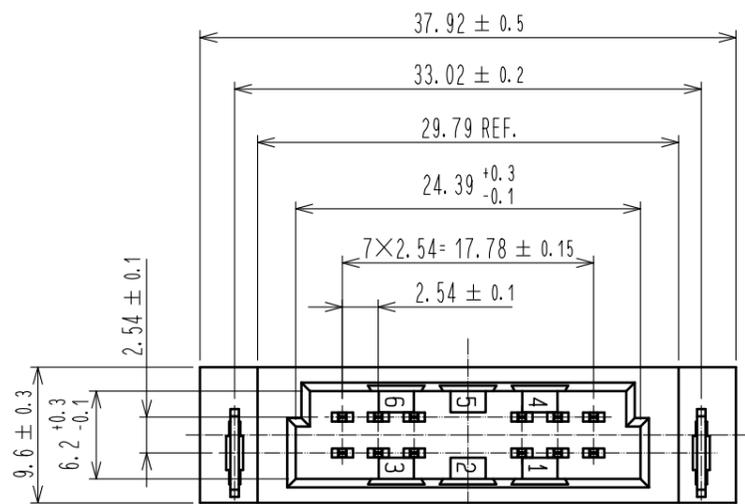
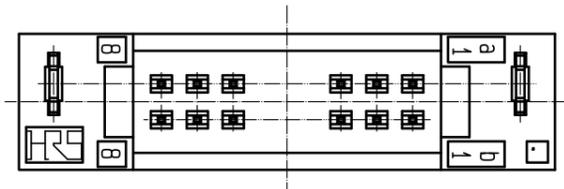


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

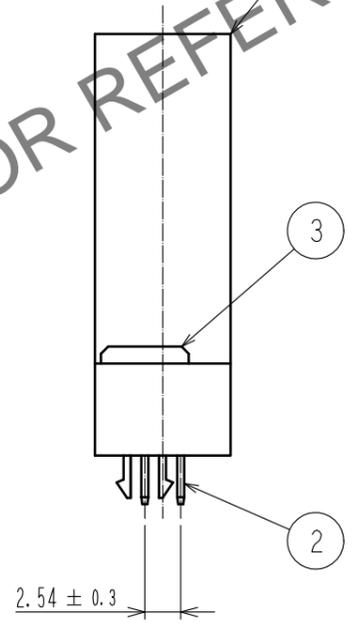

Recommended P.C.B hole pattern (t=1.6 ± 0.1)

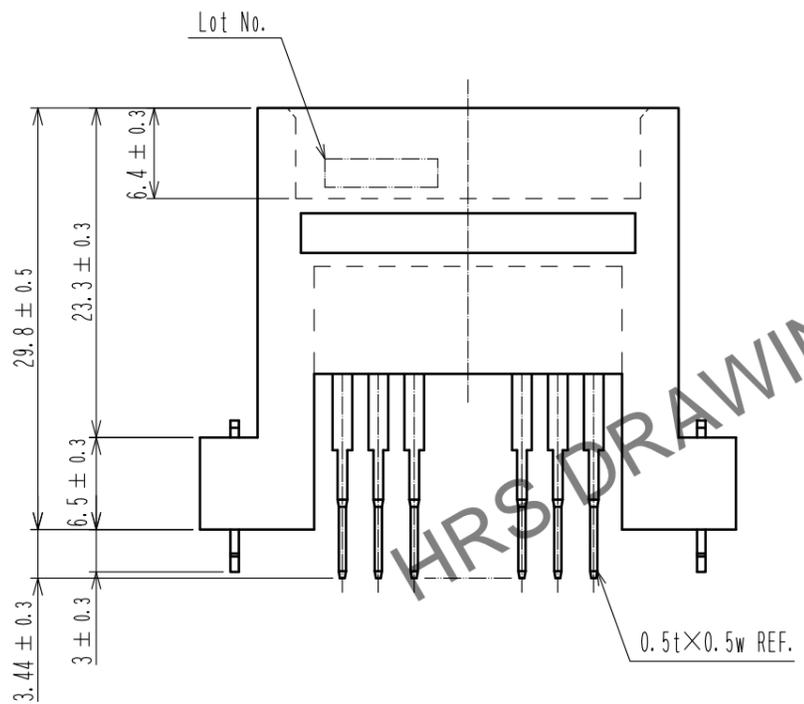

Note 1 UL (File No. E52653)



1	PBT	GRAY UL94V-0	3	PHOSPHOR BRONZE	NICKEL PLATING 1 μm + TIN PLATING 1 μm
2	BRASS		2	BRASS	CONTACT AREA : GOLD PLATING 0.2 μm LEAD AREA : TIN PLATING 2 μm UNDER PLATING : NICKEL 2.5 μm
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS	
APPROVED : NH. NAKATA 20160428			DESIGNED YU. NAKADA		
CHECKED : HT. YAMAGUCHI 20160428			CHECKED HT. YAMAGUCHI		
DESIGNED : HR. NAGAYASU 20160427			DATE 20230316		
DRAWN : HR. NAGAYASU 20160427			DRAWING NO. EDC-019597-72-00		
HRS HIROSE ELECTRIC CO., LTD.			PART NO. PCN10H-16P-2.54DSA(72)		
			CODE NO. CL0583-0227-4-72		